

**STANDARD SPECIFICATIONS
AND
DETAILS**

FOR

***CITY OF BIXBY
INFRASTRUCTURE PROJECTS
October 2005***



**CITY OF BIXBY
Department of Public Works
Beatriz Aamodt, Director
116 West Needles
Bixby, Ok 74008**

TABLE OF CONTENTS
SPECIFICATIONS SECTIONS

Section

Page No.

DIVISION I – GENERAL SPECIFICATIONS

101	Scope and Location.....	1
102	Scope, Nature, and Intent of Specifications and Drawings	1
103	Lines and Grades.....	2
104	Saturday, Sunday, Holiday and Night Work.....	2
105	Protection of Property.....	2
106	Connections	4
107	References to Other Specifications	5
108	Protection of Materials.....	5
109	Testing	5
110	“Or Approved Equal” Clause	7
111	Dewatering.....	7
112	Safety.....	7
113	Removal of Condemned Materials and Structures	8
114	Clean-up	8
115	Placing Work In Service	9
116	Submittals	9

DIVISION II – MATERIAL SPECIFICATIONS

	Approved Fittings Manufacturers	1
201	Concrete	3
202	Quick-Setting Flowable Fill	10
203	Ductile Iron Pipe, Cast Iron Fittings, And Valves	12
204	Steel Pipe and Fittings	20
205	Reinforced Concrete Pipe and Fittings	24
206	Vitrified Clay Pipe and Fittings.....	26
207	Polyvinyl Chloride Pipe (PVC), Water Service	27
208	Polyvinyl Chloride Pipe (PVC), Sewer Service	28
209	Castings.....	28
210	Conduit.....	30
211	Vaults, Pits and Manholes.....	30
212	Sand for Cushion or Backfill	31
213	Crushed Stone for Surfacing, Base Course, Stabilization.....	31
214	Rip Rap.....	32

DIVISION III – CONSTRUCTION SPECIFICATIONS

301	Right-of-Way Clearing and Restoring	1
302	Excavation and Backfill, Unclassified	2
303	Mobilization	4
304	Contractor Construction Staking.....	4
305	Pipe, Vitrified Clay.....	5
306	Pipe, Reinforced Concrete	6

307	Pipe, Ductile Iron.....	7
308	Pipe, Steel.....	8
309	Polyvinyl Chloride (PVC) Pipe, Water Service.....	9
310	Locator Wire and Detectable Marking Tape	10
311	Tapping of PVC Pipe for Service Connections	10
312	Fittings	10
313	Polyvinyl Chloride (PVC) Pipe, Sewer Service	11
314	Manhole	12
315	Connection.....	13
316	Lamphole	15
317	Valve.....	15
318	Valve Box.....	16
319	Encasement, Concrete.....	16
320	Cradle, Concrete	17
321	Piers, Reinforced Concrete	17
322	Conduit, Bored	17
323	Structure, Special.....	18
324	Materials Furnished by Contractor and Installed by City	18
325	Sodding and Seeding.....	18
326	Street Wash Down	19
327	Traffic Control Devices	20
328	Bore	20
329	Pavement, Removal and Replacement	20
330	Erosion Control Measures.....	22
331	Water Table Cradle	23
332	Conduit, Open Cut	24

DIVISION IV – WATER METER BACK FLOW PREVENTER
SPECIFICATIONS-MATERIAL

	Approved Meter and Backflow Preventer Manufacturers.....	1
400	Definitions	2
401	Displacement Water Meters – 5/8"x 3/4", 3/4", 1", & 1-1/2".....	3
402	Compound Water Meters – 2", 3", 4", 6" & 8".....	6
403	Turbine Water Meters – Irrigation and Special Services – 2" & 3".....	9
404	Turbine Water Meters - Fire Service – 4", 6", 8" & 10"	12
405	Turbine Water Meters - Fire Flow – 4", 6", 8" & 10"	15
406	Double Check Detector Assembly – 4", 6", 8" & 10"	18

DIVISION V

Adoption of ODOT "Standard Specifications for Highway Construction" 1999 Edition

STANDARD DETAILS

W0	Standard Construction Notes – Water Line
W1	Bedding Detail – Water Line
W2	Air Relief Valve and Vault – Water Line
W3	Valve Vault – Water Line
W4	Valve Box Detail – Water Line
W5	Valve Vault Frame & Lid – Water Line
W6	Thrust Block Details – Water Line
W7	Thrust Block Anchorages – Water Line
W8	Trench Conditions – Water Line
W9	Street Crossing Detail – Water Line
W10	Water Service Detail – Water Line
W11	Fire Hydrant Assembly Detail
W12	Fire Hydrant Guard Post Detail
W13	Conduit Detail – Water Line
W14	2" Blow Off Connection – Water Line
W15	Aerial Creek Crossing – Water Line
W16	Pavement Cuts & Repairs – Water Line
W17	Detector Check: Domestic Meter – Building
W18	Detector Check: Domestic Meter – Pit
W19	Detector Check without Meter
W20	Standard Meter Pit – Detector Check
W21	Detector Check – 3" or 4" Meter Vault
S0	Standard Construction Notes – Sanitary Sewer Line
S1	Bedding Detail – Sanitary Sewer Line
S2	Pipe Materials – Sanitary Sewer Line
S3	Tap on Existing Sanitary Sewer Line
S4	Sanitary Sewer Tap – Normal Trench
S5	Sanitary Sewer Tap – Narrow Trench
S6	Sanitary Sewer Tap – Normal Trench, Depth > 15'
S7	Sanitary Sewer Tap – Narrow Trench, Depth > 15'
S8	Long Service Connection – Sanitary Sewer Line
S9	Manhole Connections – Sanitary Sewer Line
S10	Cast-In-Place Manhole Detail
S11	Precast Manhole Detail
S12	Frame and Cover Detail – Sanitary Sewer Manhole
S13	Water-Tight Frame & Cover – Sanitary Sewer Manhole
S14	Manhole Details – Sanitary Sewer Line
S15	Concrete Manhole Collar For Asphalt Pavement
S16	Sanitary Sewer Manhole Steps & Invert Details
S17	Aerial Stream Crossing – Sanitary Sewer Line
S18	Encasement Details – Sanitary Sewer Line
S19	Pavement Cuts & Repairs – Sanitary Sewer Line

DIVISION I
GENERAL SPECIFICATIONS

PART 101 - SCOPE AND LOCATION

- 101.1 The location of the project is in or near the City of Bixby, Oklahoma. The character and exact location of the project are shown on the Drawings on file in the office of the City Auditor. Said Drawings clearly show the general work involved, but are not intended to show all details of the work.
- 101.2 The site and/or rights-of-way upon which the work is to be performed are shown on the Drawings. The Contractor agrees that the site and/or rights-of-way provided are adequate for the performance of the work. If any additional working area is required, the Contractor shall, at his expense, make arrangements for such working area. The City will not be liable for additional compensation as a result of any delay in obtaining rights-of-way.

PART 102 - SCOPE, NATURE, AND INTENT OF SPECIFICATIONS AND DRAWINGS

- 102.1 The Specifications and Drawings are intended to supplement, but not necessarily duplicate each other; and together constitute one complete set of Specifications and Drawings, so that any work exhibited in the one and not in the other shall be executed just as if it had been set forth in both, in order that the work shall be completed according to the complete design or designs as decided and determined by the Engineer.
- 102.2 The Drawings are not intended to be scaled for dimensions, and if dimensions not shown on the Drawings are required, the Contractor shall request them from the Engineer. Where existing utility lines or other sub-surface obstructions are shown on the Drawings, the same have been located as nearly as practicable from information furnished by owners of such, and from such surface indications as may exist at the work site. Such obstructions are shown for the purpose of advising the Contractor that they may interfere with the work to be done hereunder, but not for the purpose of indicating that the work can be performed without such interference.
- 102.3 Where soundings are shown on the drawings, the depths are determined by driving a drill rod, using the churn method with water lubrication, to a maximum depth of nine feet or to refusal, whichever is lesser in depth. By showing soundings on the drawings, the City represents only that material of hardness and character which could be penetrated by a drill rod found above the depth of sounding as shown at the point where the drill rod was driven.

- 102.4 Where exploratory drilling is indicated to have been performed on the plans, boring logs will be available for review at the office of the Engineer. The logs will be furnished for information purposes only, and are not to be construed as a true representation of actual subsurface conditions.
- 102.5 Should anything be omitted from the Specifications and Drawings which is necessary to a clear understanding of the work, or should it appear various instructions are in conflict, the Contractor shall request written instructions from the Engineer before proceeding with the construction affected by such omissions or discrepancies.
- 102.6 The Contractor's responsibility for construction covered by conflicting requirements, not provided for by addendums prior to the time of opening bids for the work represented thereby, shall not extend beyond the construction in conformity with the cheaper of the said conflicting requirements. Any increase in cost of work requested to be done in excess of the cheaper of the conflicting requirements will be paid for as Extra Work as provided for herein.

PART 103 - LINES AND GRADES

All work done under this Contract shall be done to the lines, grades, and elevations shown on the Drawings. All lines and grades shall be furnished by the Engineer, but the Contractor shall provide all batterboards, straight edges, and other materials for lines, levels, and measurements; and shall set all batterboards under direction of the Engineer. The Contractor shall give the Engineer at least forty-eight (48) hours notice as to the location where stakes are required.

PART 104 - SATURDAY, SUNDAY, HOLIDAY AND NIGHT WORK

No work shall be done between the hours of 6:00 p.m. and 8:00 a.m., nor on Saturday, Sunday, or legal holidays without the written approval or permission of the Engineer in each case, except such work as may be necessary for the proper care, maintenance, and protection of work already done, or of equipment, or in the case of an emergency.

PART 105 - PROTECTION OF PROPERTY

- 105.1 The protection of City, State and Government monuments, street signs, and other City property is of prime importance, and if the same be damaged, destroyed or removed, they shall be repaired, replaced or paid for by the Contractor. Disturbance to this property must first be approved by the agency that controls it.

105.2 No valve or other control on any utility main or building service line shall be operated for any purpose by the Contractor.

105.3 At places where the Contractor's operations are adjacent to, or crossing the path of railway, telegraph, telephone, electric and gas companies, or water lines, sanitary sewers, and storm sewers, damage to which might result in expense, loss or inconvenience, work shall not be commenced until all arrangements necessary for the protection thereof have been made. Contractor shall notify the Notification Center of Oklahoma One-Call System, Inc. of any excavation or demolition prior to the commencement of such work. Notification shall be made no sooner than ten (10) days, nor later than forty-eight (48) hours prior to start of work, excluding Saturdays, Sundays, and legal holidays.

105.4 The City has attempted to locate all storm sewers, culverts, buried telephone or electrical conduits, sanitary sewers, water mains, and gas mains that might interfere with the construction of this project. The Contractor shall cooperate with the owners of any underground or overhead utility lines in their removal and rearrangement operations in order that these operations may progress in a reasonable manner and duplication or rearrangement work may be reduced to a minimum, and that services rendered by those parties will not be unnecessarily interrupted. The revision and crossings of the various types of lines shall be made as follows:

- a) Storm sewers and culverts may be removed at the time of crossing or may be adequately braced and held in position while the pipe is placed beneath them. If the storm sewer or culvert is removed, it shall be replaced with pipe of the same type and size as that removed, and it shall be re-joined to the undisturbed line with a joint satisfactory to the Engineer. Backfill over the main, up to and around the storm sewer, shall be thoroughly compacted in order that no settlement will occur. The revision and crossing shown on the Drawing shall be at the expense of the Contractor. In the event lines, other than those shown on the Drawings, are encountered and fall within the standard trench limit and, in the opinion of the Engineer, revision of the line is necessary for the construction of the project, the Contractor will be reimbursed for the extra cost of the crossing or revision under the "Extra Work" clause of the Contract.
- b) All overhead and buried telephone and electrical conduits, and gas mains to be revised or crossed by the construction of this project shall be protected in accordance with the directions of the utility company owning the conduits and/or mains. The Contractor shall notify the companies and obtain their permission before making any crossing or revisions. The revision and crossing shown on the Drawing shall be at the expense of the Contractor. In the event lines other than those shown on the Drawing are encountered and fall within the standard trench limit and, in the opinion of the Engineer, revision of the line is necessary for the construction of the project, the Contractor will be reimbursed for the extra cost of the crossings or revision under the "Extra Work" clause of the Contract. Any overhead cables or buried cables or conduits or gas mains damaged by the

Contractor shall be repaired at his expense to the satisfaction of the Engineer and of the owner.

- c) The Contractor shall not remove any water or sanitary sewer lines except as directed by the Engineer or as required by the Drawings and Specifications, and shall adequately brace and protect them from any damage during construction. Any existing water main or sewer main or lateral damaged by the Contractor's operation will be repaired by the City's maintenance forces. The Contractor shall notify the City immediately after damaging any pipe. The repairs will be made at the Contractor's expense.

105.5 The location of utility service lines serving individual properties may or may not be shown on the Drawings, but the Contractor shall assume that such service lines exist whether or not they are shown on the Drawings, and it shall be the responsibility of the Contractor to make any necessary changes in the line and/or grade of such services, or to secure the necessary changes therein to be made by the particular utility company involved or other owner thereof, or by an agent or individual contractor approved by such utility company or other owner. Contractor shall pay the cost of all such revisions whether performed by contractor, the utility company, or other owner, or an approved contractor. In the event of interruption of a utility service as a result of accidental breakage, Contractor shall promptly notify the Engineer and the owner of the utility, and shall repair or cause the same to be repaired, in the same manner as necessary changes above provided for, and the Contractor shall do all things necessary to see to the restoration of services as promptly as may be reasonably done. All sanitary sewer service lines damaged shall be replaced with cast iron pipe, regardless of type or kind damaged.

105.6 In the event the Contractor in any way fails to comply with the requirements of protecting, repairing, and restoring of any utility or utility service, the Engineer may, upon forty-eight (48) hours' written notice, proceed to protect, repair, rebuild or otherwise restore such utility or utility service as may be deemed necessary, and the cost thereof will be deducted from any money due or which may become due the Contractor pursuant to the terms of his contract.

PART 106 - CONNECTIONS

106.1 All connections to existing water mains shall be made by the Contractor, unless noted otherwise. The Contractor shall perform his work so that these connections may be readily made. All transfer of building service line connections from the existing to the new main shall be made by the Contractor after the main has been backfilled, tested, and chlorinated, but before any sidewalks, driveways, curbs, and/or paved roadways, are replaced.

- 106.2 The Contractor shall not make any unauthorized connections to a sewer, nor shall he permit any such connections to be made. If the Contractor is properly authorized by the Engineer to make connections by installing tees in the sewer under construction, such installation shall conform to the regulation of the City.

PART 107 - REFERENCES TO OTHER SPECIFICATIONS

Where a standard American Society for Testing Materials, American Concrete Institute, American Standards Association, American Water Works Association, or other agency designation is specified for a material, that designation shall be the current revision, either tentative or adopted. If a referenced specification is in disagreement with these Specifications, the City of Bixby Specifications shall govern.

PART 108 - PROTECTION OF MATERIALS

All materials delivered to the site of the work shall be adequately housed and protected against deterioration according to the standard accepted procedures. The Contractor shall keep his storage yards in good order, pile his materials neatly, and protect them from damage.

PART 109 - TESTING

- 109.1 Materials: All materials required to be tested shall be tested by a laboratory of good reputation, previously approved by the City. No material shall be accepted for construction unless it bears the approval of the laboratory. Reports of tests shall be forwarded to the City. Before final acceptance of the project, all materials shall be tested and shall be found in good and proper condition, or shall be placed in such condition. The cost of all testing shall be paid by the Contractor.
- 109.2 Testing of Manholes: All manholes will be tested using the vacuum test method, following the Manufacturer's recommendations for proper and safe procedures. The vacuum tester shall be a manufactured by Cherne Industries or equal.

All pipes for vacuum testing entering the manhole shall be installed at the top access point of the manhole.

A vacuum of 10 inches of mercury (Hg) (5.0 psi) shall be drawn on the manhole and the time shall be measured for the vacuum to drop to 9 inches of mercury (Hg) (4.5 psi). The manhole shall pass the test if the time measurement exceeds the values indicated in the following table:

**Vacuum Test Timetable
Manhole Diameter – Inches**

<i>Depth – ft</i>	<i>48 Inches</i>	<i>60 Inches</i>	<i>72 Inches</i>	<i>96 Inches</i>	<i>144 Inches</i>
4	10 sec.	13 sec.	16 sec.	19 sec.	21 sec.
8	20 sec.	26 sec.	32 sec.	38 sec.	44 sec.
12	30 sec.	39 sec.	48 sec.	57 sec.	65 sec.
16	40 sec.	52 sec.	64 sec.	76 sec.	88 sec.
20	50 sec.	65 sec.	80 sec.	95 sec.	110 sec.
24	60 sec.	78 sec.	96 sec.	114 sec.	132 sec.
+ each 2'	+ 5 sec.	+ 6.5 sec.	+ 8.0 sec.	+ 9.5 sec.	+ 11 sec.

Manhole depth shall be rounded to the nearest foot. Intermediate values shall be interpolated. For depths above 24 feet, add the values listed on the last line of the table for each 2 feet of additional depth.

If the manhole fails the vacuum test, the Contractor shall perform additional repairs and repeat the test procedures until satisfactory results are obtained.

All repairs and testing are the responsibility of the Contractor and will be performed at no additional cost to the City.

No payment will be made for any manholes which have not passed the vacuum test.

- 109.3 Flushing of Sanitary Sewers: Flushing of sewer lines will be performed by the Contractor, but the City shall lend such assistance as may be required. Any infiltration of flushing water or other leaks into the sewer shall not be acceptable, and the Contractor shall immediately correct the cause of the leak in a manner acceptable to the Engineer.
- 109.4 Testing and Chlorinating Water Mains: Testing and chlorinating water mains will be performed by the Contractor, but the City shall lend such assistance as may be required. Water mains shall be testing in accordance with the Standard Specifications for "Installation of Ductile Iron Water Mains and Their Appurtenances," AWWA Designation C-600. The pressure test of 150 psi shall be for thirty minutes' duration. If the line passes the test without significant pressure drop, a leakage test shall be made at the normal operating pressures under which the line is to operate for two hours' duration. Before being placed in service, all mains shall be chlorinated in accordance with "AWWA Standard for Disinfecting Water Mains," AWWA Designation C-651. Where temporary plugs are required for pressure testing, the Contractor shall furnish and install the plug and temporary blocking, and remove after testing is complete. The cost shall be included in the unit price bid for pipe. No additional payment will be made.

PART 110 - "OR APPROVED EQUAL" CLAUSE

When a material is specified or shown on the Drawings by brand or Manufacturer's name, any other material that will adequately perform the same function, in the opinion of the City, may be accepted for use.

PART 111 - DEWATERING

The Contractor shall provide all necessary pumps, drains, dams, well points, and other means for removing water from, or preventing water from entering the trench or other excavation until the project is completed. Sufficient pumps or other works shall be made available at all times to hold the water at a safe level as determined by the Engineer. Water from the excavation shall be properly disposed of so that no damage or interference results to public health, public or private property, completed or uncompleted work, other projects, or streets.

PART 112 - SAFETY

- 112.1 Excavations: The Contractor shall adequately shore, or sheet, and brace the excavation, or shall slope the sides of the trench in accordance with the State of Oklahoma Department of Labor requirements.
- 112.2 Explosives: In handling explosives used during the construction of the project, the Contractor shall adhere to all Federal and State Laws and City Ordinances regulating the purchase, transportation, storage, handling, and use of such explosives. No blasting shall be done without obtaining a "Blasting Permit" from the City and presence of the Inspector. All equipment, tools, and materials used shall be of the correct type and in good conditions for the operation. The Contractor shall take all necessary precautions to avoid damage to property resulting from the transportation, storage, handling and use of explosives. Before blasting, the Contractor shall cover the area to be blasted with steel mesh mat or other suitable material, reinforced with timbers of sufficient weight so that rock and debris will be confined to the excavation. Any blasting within ten feet of a water, sewer, gas, or pipe line shall be done with very light charges, and utmost care should be taken to avoid disturbance to these lines. All locations for blasting shall be subject to approval of the Engineer.
- 112.3 Danger Signals and Protection: When the Contractor is performing any type of construction or excavation work, or is stockpiling or storing any materials or equipment upon or adjacent to any street, alley, sidewalk, residence, public ground, or other location that is likely to be subject to pedestrian or vehicular traffic, he shall furnish, erect, and maintain substantial guard rails, safety fencing, lights, and traffic control devices around the project to protect pedestrians, animals, and vehicles from

injury or damage. All traffic control shall be in accordance with the latest edition of the Manual of Uniform Traffic Control Devices (MUTCD). Safety and traffic control

devices shall be installed and removed only at the direction of the Engineer. The Contractor shall provide sufficient proper signals and flagmen for warning during blasting operations.

- 112.4 Power Lines: No person, materials, or equipment shall come within six feet of any power line carrying more than 440 volts unless the electric power services has been first discontinued.
- 112.5 Fire Prevention and Protection: The Contractor shall take all necessary measures to prevent fire, and shall provide satisfactory fire fighting means at the location of work.
- 112.6 Interference with Traffic: The Contractor shall construct and maintain adequate and safe bridges or crosswalks over excavations, where required. When a roadway or sidewalk is not closed, the Contractor shall provide a safe substitute route for any portion obstructed by his operations. If a roadway or sidewalk is closed to traffic, the Contractor shall provide and mark detours. As directed by the Engineer, construction across roadways or sidewalks may be done by open excavation.
- 112.7 Condition of Equipment and Materials: All equipment, tools, appliances, and materials used in connection with the project shall be handled and operated only when they are in safe operating condition and in accordance with a standard safety procedure.

PART 113 - REMOVAL OF CONDEMNED MATERIALS AND STRUCTURES

The Contractor shall remove from the site of the work, without delay, all rejected and condemned materials or structures of any kind brought to or incorporated in the work. Upon his failure to do so, or to make satisfactory progress in so doing, within forty-eight (48) hours after the service of a written notice from the Engineer ordering such removal, the condemned material or structure may be removed by the City and the cost of such removal will be taken out of the money that may be due or may become due the Contractor. No such rejected or condemned material shall again be offered for use by the Contractor.

PART 114 - CLEAN-UP

- 114.1 Immediately upon installation of any portion of the work, the Contractor shall restore all fills, topsoil, and utilities to their location and condition prior to construction.
- 114.2 Immediately upon installation of any block in length of the work herein contemplated, the Contractor shall remove all materials, tools, debris, excess excavated material, and equipment; and restore the site in a manner satisfactory to the Engineer.

- 114.3 Clean-up and restoration of service line transfers shall be made immediately following each transfer installation.

PART 115 - PLACING WORK IN SERVICE

If desired by the City, portions of the work may be placed in service when completed and the Contractor shall give prior access to the work for this purpose, but such use and operation shall not constitute an acceptance of the work.

PART 116 - SUBMITTALS

- 116.1 The Contractor shall submit to the Engineer, six (6) copies of material submittals for all material he proposes to use. Construction shall not begin until the Engineer has approved the submittals.
- 116.2 Submittals for pipe shall consist of notarized certifications, from the Manufacturer, that the pipe was manufactured and tested in accordance with the applicable Specifications. The certifications shall indicate the pipe diameter, the pressure rating, and the batch number from which the pipe was manufactured. For concrete and steel pipelines 16-inches and larger, a detailed laying schedule prepared by the Manufacturer shall be submitted, along with the detail design calculations.
- 116.3 Submittals for material other than pipe shall consist of Manufacturer's product literature or shop drawings, indicating dimensions and Material Specifications. Submittals shall include reference to compliance with AWWA, ASTM, NSF, and other applicable standards.
- 116.4 All delivery tickets, including factory certification of ductile iron pipe, shall be surrendered to City Inspector or their representative.

SECTION END

DIVISION II

**MATERIAL SPECIFICATIONS
APPROVED FITTING MANUFACTURERS**

Tapping Saddles and Valves	3-Way Hydrants
Mueller (DIP)	*Meller Super Centurian (Aquagrip allowed)
American (DIP)	*AVK
Smith-Blair (DIP)	<i>*Note: Oil Filled w/Stainless Steel Breakaway</i>
Restrained Joint Systems	Valve Boxes
American Flex Ring (DIP)	Tyler 6850 Series 562-S
EBAE Megalug (DIP,PVC)	East Jordan 85502737 (562-S)
Ford Meter Box Uni-Flange(DIP,PVC)	
Star StarGrip(DIP,PVC)	
US Pipe TR Flex (DIP gavity sewer only)	4" Reversible Rim & 23 1/4" Lids (Water)
Griffin SNAP-LOK (DIP gravity sewer only)	Neenah 1797-4R
McWane THRUST Lock (DIP gravity sewer only)	Deeter 1155
	East Jordan 2132RT
	Sigma MH121WV-35
Resilient Wedged Gate Valves	
American	
Mueller (Aquagrip allowed)	
AVK	Uniflanges
	EBAE Series 2100 Megaflange
Check Valves	1 1/2" & 2" Meter Setters
American Flow Control	Ford B-C10046-011 (1 1/2"), B-C10046-013(2")
Mueller	Mueller 1 1/2"x15"B2423, 2"x15"B2423
AVK	AYMcDonald 20C615WFFF6654 (1 1/2")
	AYMcDonald 20C715WGFF7766x22.75 (2")
Couplings for Out-of-Round CI Pipe	
Viking-Johnson	
Smith-Blair	

Air Relief Valves	4" Reversible Rim & 23 1/4" Lids (San)
APCO	(Only McGard system allowed for sealed lids)
Crispin	Neenah 1797-4R
ValMatic	Deeter 1155
	East Jordan 2132R
	Sigma MH121N-353
Butterfly Valves	
Pratt	
Mueller	8" Non-Reversible Rim & 23 1/4" Lid (San)
AVK	(Only McGard system allowed for sealed lids)
	Deeter 1265
	Neenah 1797
Manhole Adjusting Rings	East Jordan 2132
East Jordan V-1901 series (CI only)	Sigma MH122N-35
Deeter 1856 (CI only)	
Eagle PreCast (Concrete)	
Ladtech HDPE	4" Reversible Rim & 31 1/2" Lid (San)
	(Only McGard system allowed for sealed lids)
	Deeter 1296-R
Fittings	East Jordan 2230
American	Sigma MH123N-35
Griffin	
McWane	
Clow	Lampholes (with closed pickhole)
Star	East Jordan 3312800lid/3342800frame
Sigma	Deeter 1828
US Pipe	
Tyler	
East Jordan	
Water Meter Cans, Rims, Lids (non lockable)	
(for 5/8"x3/4", 3/4", 1", 1 1/2", 2"meters)	
East Jordan 32534018 (34 GALV or Equiv.)	
32535018 (59 GALV or Equiv.)	
32535524 (5 TX GALV or Equiv.)	
32536024 (536 GALV or Equiv.)	
Brook (Metal Lid)	

PART 201- CONCRETE

201.1 CEMENT

- 201.1.1 All cement used in the work shall be a well-known brand of true Portland Cement and shall conform to the Standard Specifications for Portland Cement, ANSI/A.S.T.M. Designation C150. Unless otherwise permitted, the Contractor shall use only one brand of cement in the work and under no condition shall he use more than one brand of cement in the same structure. Cement, which for any reason has become partially set or contains lumps or cakes will be rejected and shall be removed from the site.
- 201.1.2 The acceptance or rejection of cement shall rest with the Engineer. All rejected cement shall be plainly marked for identification, shall be immediately removed from the work, and shall not again be offered for inspection. Cement kept in storage for several months may be subject to repeated tests, if required.
- 201.1.3 The cement shall be delivered in strong cloth or paper bags. No cement shall be used and no cement shall be inspected unless delivered in the original package with the brand and name of the Manufacturer plainly marked thereon. Each bag of cement shall contain approximately ninety-four pounds of cement, net weight, and four bags shall be the equivalent of one barrel. Packages received in broken or damaged condition will be rejected or accepted only as fractional packages.
- 201.1.4 The Contractor shall provide, at the site of the work, a suitable weather tight building, or buildings, having a tight floor properly blocked or raised from the ground, for the storage of cement. The building shall be large enough to permit keeping on hand a supply of cement in quantity sufficient to prevent delays or interruptions to the work, which might be due to the lack of cement. The cement shall be stored in such manner to permit easy access for the proper inspection and identification of each shipment. Cement in bags shall not be piled to a height in excess of seven feet. Suitable accurate scales shall be provided by the Contractor for weighing the cement. After it has been delivered to the job, the Contractor will not be permitted to remove any of the cement to any other job or dispose of any of this cement in any way without the consent of the Engineer.
- 201.1.5 At the beginning of operations and at all other times while cement is required, the Contractor shall have, at the site of the work, an ample supply of acceptable cement and shall carefully guard against possible shortage on account of rejection, irregular deliveries, or any other cause.

201.2 WATER

- 201.2.1 All water used in mixing mortar or concrete shall be free from acid, alkali, oil, salt, vegetable, or other matter in sufficient quantity to be injurious to the finished product, and shall be from an approved source.

201.3 AGGREGATE

201.3.1 Fine aggregate for concrete shall be clean, hard, durable, uncoated grains of Arkansas River sand or other sand acceptable to the Engineer. It shall be free from injurious amounts of dust, clay balls, soft or flaky particles, shale, alkali, organic matter, loam, or other deleterious substances. It shall not contain more than three per cent, by weight, of material, which can be removed by standard decantation tests. If the color of the supernatant liquid is darker than that of the reference standard color solution when subjected to the Standard Test For Organic Impurities in Sands for Concrete ANSI/ASTM C40, the fine aggregate shall be rejected unless it passes the Standard Test for Effect of Organic Impurities in Fine Aggregate on Strength of Mortar ANSI/ASTM C87.

201.3.2 Fine aggregate shall be graded approximately within the limits shown in the following table. If not enough fines are available in the natural sands, limestone dust, or other approved fines shall be added:

Per Cent Passing Standard Square Mesh Screens

No. 4	No. 20	No. 50	No. 100
95-100	45-80	10-30	5-10

201.3.3 Coarse aggregate shall consist of the best available crushed limestone or other approved material. River gravel or other material with smooth surfaces shall not be used without specific written approval of the Engineer. Coarse aggregate shall be clean, tough, sound, durable rock and shall not contain harmful quantities of foreign materials and must be satisfactory to the Engineer.

201.3.4 Coarse aggregate shall be graded approximately within the limits shown in the following table:

Percent Passing Standard Square Mesh Screens

Aggregate	2 1/2"	2"	1 1/2"	1"	3/4"	1/2"	3/8"	No. 4
Max Size	2 1/2"	2"	1 1/2"	1"	3/4"	1/2"	3/8"	No. 4
2"	100	95-100	60-95	50-83	40-70	20-40		0-5
1 1/2"		100	95-100		40-70		10-30	0-5
3/4"				100	95-100		40-75	0-5

201.3.5 Coarse aggregate shall conform to Standard Specifications for Concrete Aggregates, ANSI/ASTM C33, except as to gradation. The maximum size aggregate to be used in structures six inches thick and under shall be three-quarters inch; in structures from six inches to ten inches thick, the maximum size of aggregate shall be one and one-half inches. If required, the Contractor shall furnish test certificates showing the aggregates meet the above requirements.

201.3.6 In case the concrete resulting from the mixture of the aggregates is not of a workable character or does not make the proper finished surface, the Engineer may require a different grading in order to secure the desired results, or they may allow

the use of inert admixtures to correct deficiencies, upon proper showing that such use will not materially lower the strength or increase the permeability of the concrete.

201.4 STEEL REINFORCEMENT

- 201.4.1 All reinforcing steel shall be deformed bars and shall conform to the requirements of the Standard Specifications for Deformed and Plain Billet Steel Bars for Concrete Reinforcement, ANSI/ASTM A615, for grade 40 or grade 60. All steel shall be manufactured in the United States.
- 201.4.2 The Engineer reserves the right to require a test of three specimens of each size of bar from each carload received. These tests shall be made by a laboratory or testing firm approved by the Engineer and the cost of such testing shall be included in the price bid for steel reinforcement.

201.5 STRENGTH AND PROPORTION

- 201.5.1 The concrete shall have a compressive strength of not less than four (4) thousand pounds per square inch (4,000 PSI), unless otherwise specified in the plans, as determined from test cylinders at twenty-eight days, made, cured, and broken, as hereinafter specified.
- 201.5.2 The concrete shall contain not less than 6 sacks of cement per cubic yard of finished concrete. With the approval of the Engineer, admixtures may be added in order to increase workability.

201.6 TESTING OF CONCRETE

- 201.6.1 During the progress of the work, a reasonable number of compression tests shall be made when and if required by the Engineer. Each test shall consist of not less than three test cylinders. At least one test shall be made for each one hundred cubic yards of concrete placed. The test cylinders shall be made and stored in accordance with the Standard Method of Making and Curing Concrete Test Specimens in the Field, ANSI/ASTM C31, and shall be tested in accordance with the requirements relating to making compression tests on concrete test specimens as given in the Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens, ANSI/ASTM C39.
- 201.6.2 All test specimens shall be kept as near to the point of sampling as possible and yet receive the same protection from the elements as is given to the portions of the structure being built. Specimens shall be protected from injury. They shall be sent to a testing laboratory approved by the Engineer not more than seven days prior to the time of the test, and while in the laboratory shall be kept in the ordinary air at a temperature of approximately 70 degrees Fahrenheit until tested.
- 201.6.3 The Contractor shall furnish the Engineer certified reports on these tests and shall pay all the expense of making the tests and of furnishing the concrete for preparing and testing the cylinders.

201.7 RESPONSIBILITY OF CONTRACTOR FOR STRENGTH

- 201.7.1 It is the intent of these Specifications that the Contractor shall guarantee that concrete of the specified compressive strength is incorporated in the structures and that the responsibility for producing the required grades of concrete is assumed by the Contractor.
- 201.7.2 Should the average strengths shown by test cylinders fall below the strengths required, the Engineer will require any or all of the following changes: amount of cement, grading of aggregate, or ratio of the water to the cement used. If the tests disclose that the strength of the concrete is insufficient for the structure as built, the Engineer may condemn the part of any structure in which concrete of insufficient strength has been placed and the Contractor, at his cost, shall remove and replace such concrete with concrete meeting these Specifications.

201.8 EXPERIMENTAL CONCRETE MIXES

The Contractor shall make experimental mixes prior to the placing of the concrete and at any time during the progress of the work when necessary to demonstrate that the concrete will meet these Specifications. Materials for making experimental mixes shall be furnished by the Contractor and these materials shall be identical with those intended for use in the work. The cost of the materials, as well as the costs of crushing test specimens made from the experimental mix, shall be borne by the Contractor and shall be included in the price bid for concrete.

201.9 MIXING

The concrete shall be mixed in an approved batch machine or mixer. The ingredients shall be accurately measured by weight, unless measurement by volume is permitted by the Engineer, before being placed in the mixer. Measuring boxes or other approved measuring apparatus shall be such that the proportions can be accurately determined. The quantity of water to be added, which will vary with the degree of dryness of the material and with the weather conditions, shall be accurately measured for each batch of concrete. Means shall be provided by which a measured quantity of water can be introduced at any stage of the process. The mixing shall be done in a thorough and satisfactory manner and shall continue until every particle of aggregate is completely covered with mortar. The mixing time for each batch shall not be less than one minute after the materials are in the mixer. The entire contents of the drum shall be discharged before recharging. Retempering of concrete, which has partly hardened, will not be permitted.

201.10 CONSISTENCY

- 201.10.1 All reinforced concrete which is required to be spaded or puddled in forms or around reinforcing steel shall be of such consistency that: all aggregate will float uniformly throughout the mass without settling or segregation; when dropped directly from the discharge chute of the mixer, it will flatten out at the center of the pile but will stand up at the edges, the pile spreading from internal expansion and not by flowing; it will

flow sluggishly when tamped or spaded; it can be readily puddled into corners and angles of forms and around reinforcing steel, it can be readily spaded to the bottom of the pour or to a depth of several feet any time within thirty minutes after placing.

201.10.2 A desirable consistency is one which results in a very slight accumulation of water at the top of a layer several feet in thickness, but not with segregation or accumulation of laitance.

201.10.3 If, through accident, intention, or error in mixing, any concrete shall, in the opinion of the Engineer, vary materially from the consistency specified, such concrete shall not be incorporated in the work but shall be discharged as waste material.

201.11 PLACING CONCRETE

201.11.1 Before beginning a run of concrete, surfaces of the forms, reinforcing steel, and concrete previously placed, shall be thoroughly cleaned of hardened concrete or foreign materials. Forms shall be thoroughly wetted or oiled.

201.11.2 Concrete shall be placed in the forms immediately after mixing. It shall be so deposited that the aggregates are not separated. Dropping the concrete any considerable distance, generally in excess of five feet, depositing large quantities at any point and running or working it along the forms, or any other practice tending to cause segregation of the ingredients, will not be allowed. It shall be compacted by vibration or continuous tamping, spading, or slicing. Care shall be taken to fill every part of the forms, to work the coarser aggregate back from the face, and to force the concrete under and around the reinforcement without displacing it. All concrete shall be thoroughly vibrated, except where specifically excepted in the Specifications. The concrete shall be deposited in continuous horizontal layers and, whenever practicable, concrete in structures shall be deposited continuously for each monolithic section of the work. Chutes and tremies used for conveying concrete shall be mortar-tight.

201.11.3 Work shall be arranged in order that each part of the work shall be poured as a unit, if this is possible. Where necessary to stop pouring concrete, the work shall be brought up in level courses and against a vertical stop board.

201.11.4 The placing of concrete under water, where permitted, must be done by special approved methods.

201.12 PLACING IN COLD WEATHER

201.12.1 No concrete shall be placed without the specific permission of the Engineer when the air temperature is at or below thirty-five degrees Fahrenheit.

201.12.2 If concreting in freezing weather is permitted by the Engineer, care shall be taken to prevent the use of any frozen material. In addition to adequate provision for protecting the concrete against chilling or freezing, the Contractor shall be required to heat the water and aggregate in order that when deposited in the forms, the

concrete will have a temperature of not less than fifty degrees Fahrenheit, nor more than eighty degrees Fahrenheit. The concrete shall be adequately protected in order to maintain this temperature for a minimum of seventy-two hours after it has been placed and a temperature above thirty-two degrees Fahrenheit for a period of two additional days. The work shall be done entirely at the Contractor's risk.

201.12.3 No chemicals or other foreign matter shall be added to the concrete for the purpose of preventing freezing.

201.13 READY-MIXED CONCRETE

201.13.1 Ready-mixed concrete may be used on the work, with the approval of the Engineer, when the Contractor can demonstrate that the concrete can be furnished in accordance with the Specifications hereinabove and that delivery can be made at such rate as will insure the continuity of any pour. Standard Specifications for Ready-Mix Concrete, ANSI/ASTM C94, when not in conflict with the Specifications herein, shall control the furnishing of ready-mix concrete.

201.13.2 All mixer trucks shall be equipped with water meters. Additional water shall be added at the job site only with the specific approval of the Engineer.

201.14 CONSTRUCTION JOINTS

201.14.1 Construction joints shall be located as shown on the drawings and at other points as may be necessary during the construction, provided that the location and nature of additional joints shall be approved by the Engineer. In general, joints shall be located at points of minimum shear, shall be perpendicular to the principal lines of stress, and shall have suitable keys having areas of approximately one-third of the area of the joints.

201.14.2 In resuming work, the surface of the concrete previously placed shall be thoroughly cleaned of dirt, scum, laitance, or other soft material, and shall be roughened. The surface shall then be thoroughly washed with clean water and covered with at least one-half inch of cement mortar, after which concreting may proceed. Mortar shall be placed in a manner in order not to splatter forms and reinforcing steel.

201.15 FINISH OF CONCRETE SURFACES

201.15.1 All surfaces exposed to view shall be free from conspicuous lines, affects, or other irregularities caused by defects in the forms. If for any reason this requirement is not met, or if there are any conspicuous honeycombs, the Engineer may require the correction of the defects by rubbing with carborundum bricks and water until a satisfactory finish is obtained.

201.15.2 Immediately after removing the forms, all wires or other exposed metal shall be cut back of the concrete surface, and the depressions thus made and all honeycombs and other defects shall be pointed with mortar and then rubbed smooth. If the Engineer deems any honeycomb or other defect to require such treatment, the

defective concrete shall be cut out to a depth sufficient to expose the reinforcement and to afford a key for the concrete replacing that cut out.

201.16 CURING CONCRETE

Exposed surfaces of concrete shall be protected by approved methods from premature drying for a period of at least seven days. Curing compounds, when approved by the Engineer, shall be applied according to the Manufacturer's recommendations. The Engineer may require the frequent wetting of the concrete and the use of means to protect it from the direct rays of the sun.

201.17 PLACING REINFORCEMENT

201.17.1 All reinforcement, when placed, shall be free from mill scale, loose or thick rust, dirt, paint, oil or grease, and shall present a clean surface. Bends and splices shall be accurately and neatly done and shall conform to American Concrete Institute Manual of Standard Practice for Detailing Reinforced Concrete Structures.

201.17.2 All reinforcing shall be placed in the exact position shown on the drawings and shall be held firmly in position by means of approved metal spacers and supports, by wiring to the forms, and by wiring the bars together at intersections with approved wire ties in order that the reinforcement will not be displaced during the depositing and compacting of the concrete. The placing and fastening of reinforcement in each section of the work shall be approved by the Engineer before any concrete is deposited in the section. Care shall be taken not to disturb the reinforcement after the concrete has taken its initial set.

201.18 FORMS

201.18.1 Forms shall be so designed and constructed that they may be removed without injuring the concrete. The material to be used in the form for exposed surfaces shall be sized and dressed lumber or metal in which all bolt and rivet heads are countersunk. In either case, a plain, smooth surface of the desired contour must be obtained. Undressed lumber may be used for backing or other unexposed surfaces, except inside faces of conduit.

201.18.2 The forms shall be built true to line and braced in a substantial and unyielding manner. They shall be mortar-tight, and if necessary to close cracks due to shrinkage, shall be thoroughly soaked in water. Forms for re-entrant angles shall be filleted, and for corners shall be chamfered. Dimensions affecting the construction of subsequent portions of the work shall be carefully checked after the forms are erected and before any concrete is placed. The interior surfaces of the forms shall be adequately oiled with a non-staining mineral oil to insure the non-adhesion of mortar.

201.18.3 Form lumber, which is to be used a second time, shall be free from bulge or warp and shall be thoroughly cleaned. The forms shall be inspected immediately preceding the placing of concrete. Any bulging or warping shall be remedied, and all

dirt, sawdust, shavings, or other debris within the forms shall be removed. No wood device of any kind used to separate forms will be permitted to remain in the finished work.

201.18.4 Temporary openings shall be placed at the bottom of the column and wall forms and at other points where necessary to facilitate cleaning and inspection immediately before depositing concrete.

201.19 REMOVAL OF FORMS

201.19.1 Forms shall be removed in such manner as to insure the complete safety of the structure. No forms shall be removed except with the express approval of the Engineer. In general, this approval will be based on the following:

201.19.2 Forms on ornamental work, railings, parapets, and vertical surfaces which do not carry loads and which will be exposed in the finished work shall be removed within twenty-four to forty-eight hours after placing, depending upon weather conditions.

1. Girder, beam, and joist sides only, column, pier, abutment, and wall forms may be removed within twenty-four to forty-eight hours after placing, depending upon weather conditions. No backfill shall be placed against walls, piers, or abutments, unless they are adequately supported or have reached the required strength.
2. Girder, beam, and joist soft fit forms shall remain in place with adequate shoring underneath, and no construction load shall be supported upon, nor any shoring removed from any part of the structure under construction until that portion of the structure has attained sufficient strength to support safely its weight and the loads placed thereon.

PART 202 - QUICK-SETTING FLOWABLE FILL

202.1 MATERIALS

202.1.1 Quick-setting flowable fill shall be a sand-cement slurry consisting of the following materials in a one cubic yard mixture:

Type I Cement	100 pounds
Sand	2,925 pounds
Water	585 pounds
Master Builders Pozzutec 20 (ASTM C494, Type C and E)	80 ounces

202.1.2 Mix can change somewhat due to type of sand used.

202.1.3 The combination of materials above shall be mixed in a ready-mix truck to produce the sand-cement slurry mixture.

202.1.4 Submittals shall be delivered to the City of Bixby at a date set by the Engineer. Submittals shall include the items outlined in ODOT Specification 701.03.

202.2 CONSTRUCTION METHODS

202.2.1 For each cubic yard of quick-setting flowable fill material required, the amount of the mix components in the MATERIALS section shall be used to produce the sand-cement slurry mixture. The slurry mixture shall be mixed between 70 to 100 revolutions of the ready-mix truck.

202.2.2 To minimize segregation, all flowable fill material shall be re-mixed at the project site at mixing speed in the ready-mix truck for approximately two minutes immediately prior to discharge of the sand-cement slurry mixture. Re-mixing of the flowable fill slurry shall be done under the direction of the Engineer.

202.3 TESTING

202.3.1 Special Provisions, "Flowable Fill Testing Procedures" identifies the Ohio Ready-Mixed Concrete Association (ORMCA) Standards FF1(94), and FF4(94) which shall be used in the performance of field testing.

202.3.2 The following are the testing requirements for the quick-setting flowable fill:

Flow	Minimum = 4 ½ inches
Compressive Strength (28 days)	Minimum = 25 pounds per square inch (psi)
	Maximum = 60 pounds per square inch (psi)

202.4 GENERAL

The time required before placing pavement over the cured quick-setting flowable fill is a minimum of six hours and/or whenever a minimum penetration value of 400 pounds per square inch (psi) is achieved. Penetrometer readings shall be taken with a Soiltest Mortar Penetrometer, Model CT-421A, or approved equal. The upper three inches of the area of the cured flowable fill mixture to be tested shall be removed prior to taking the penetrometer readings. The test value of record shall be the average of three tests.

PART 203 - DUCTILE IRON PIPE, DUCTILE AND CAST IRON FITTINGS, AND VALVES

203.1 PIPE AND FITTINGS

- 203.1.1 Where ductile iron pipe (DIP) three (3) inches in diameter and larger is specified or required, it shall conform to, and be tested in accordance with, the current American National Standard for Ductile Iron Pipe, Centrifugally Cast in Metal Molds or Sand-Lined Molds, for Water or Other Liquids, ANSI/AWWA C151/A21.51.
- 203.1.2 Length of joints shall be either eighteen or twenty feet. The minimum standard thickness class of each size pipe shall be as follows:

<i>Pipe Size</i>	<i>Thickness Class</i>
4" thru 8"	51
10" and larger	50

- 203.1.3 For 16-inch and larger Water Ductile Iron Pipe, all bell and spigot joints shall be electrically bonded, using a #4 AWG bare copper wire of adequate length to braze, using a #15 cadweld cartridge, the copper wire to the bare metal at the bell and spigot. Cost shall be included in the unit price bid per lineal foot of Ductile Iron Pipe.
- 203.1.4 For 16-inch and larger Water Ductile Iron Pipe, junction box test stations shall be furnished and installed, EXCEPT, no magnesium anode banks shall be furnished or installed. Junction box test stations shall be installed in accordance with the stationing shown on the Schedule of Anode Spacing. Cost shall be included in the unit price bid per lineal foot of Ductile Iron Pipe.
- 203.1.5 Fittings for ductile iron pipe shall be cast or ductile iron. Cast iron and ductile iron fittings shall conform to the American National Standard for Ductile-Iron and Gary-Iron Fittings, 3-inch through 48-inch, ANSI/AWWA C110; or the American National Standard for Ductile-Iron Compact Fittings, 3-inch through 48-inch, ANSI/AWWA C153. The length of all solid sleeves (both AWWA C110 and C153) shall be the longest length listed in the AWWA C110 Specification (12-inch length for 3-inch through 12-inch sleeves, 15-inch length for 14-inch through 24-inch sleeves, and 24-inch length for 30-inch through 48-inch sleeves).
- 203.1.6 Interior of all sanitary sewer 15-in and larger ductile iron pipe shall be lined with 40 mils of ceramic epoxy ("Protecto 401", or equal).

203.1.6.1 Condition of Ductile Iron Prior to Surface Preparation

All ductile pipe and fittings shall be delivered to the application facility without asphalt, cement lining, or any other lining on the interior surface. Because removal of old linings may not be possible, the intent of this Specification is that the entire interior of the ductile iron pipe and fittings shall not have been lined with any substance prior to the application of the specified lining material and no coating shall have been applied to the first six inches of the exterior of the spigot ends.

203.1.6.2 Lining Material

The Standard of Quality is Protecto 401 Ceramic Epoxy. The material shall be an amine cured novalac epoxy containing at least 20% by volume of ceramic quartz pigment. Any request for substitution must be accompanied by a successful history of lining pipe and fittings for sewer service, a test report verifying the following properties, and a certification of the test results.

- A. A permeability rating of 0.00 when tested according to Method A of ASTM E-96-66, Procedure A with a test duration of 30 days.
- B. The following test must be run on coupons from factory lined ductile iron pipe:
 - 1. ASTM B-117 Salt Spray (scribed panel) – Results to equal 9.0 undercutting after 2 years.
 - 2. ASTM G-95 Cathodic Disbondment 1.5 volts @77°F. Results to equal no more than 0.5mm undercutting after 30 days.
 - 3. Immersion Testing rated using ASTM D-714-87.
 - a. 20% Sulfuric Acid – No effect after 2 years.
 - b. 140°F twenty-five percent Sodium Hydroxide – No effect after 2 years
 - c. 160°F Distilled Water – No effect after two years.
 - d. 120°F Tap Water (scribed panel) 0.0 undercutting after two years with no effect.
- C. An abrasion resistance of no more than 3 mils (.075 mm) loss after one million cycles using European Standard EN 598. 1994 Section 7.8 Abrasion Resistance.

203.1.6.3 Application

A. Applicator

The lining shall be applied by a competent firm with a successful history of applying linings to the interior of ductile iron pipe and fittings.

B. Surface Preparation

Prior to abrasive blasting, the entire area to receive the protective compound shall be inspected for oil, grease, etc. Any areas with oil, grease, or any substance which can be removed by solvent, shall be solvent cleaned to remove those substances. After the surface has been made free of grease, oil or other substances, all areas to receive the protective compounds shall be abrasive blasted using sand or grit abrasive media. The entire surface to be lined shall be struck with the blast media so that all rust, loose oxides, etc., are removed from

the surface. Only slight stains and tightly adhering oxide may be left on the surface. Any area where rust reappears before lining must be reblasted.

C. Lining

After the surface preparation and within 8 hours of surface preparation, the interior of the pipe shall receive 40 mils nominal dry film thickness of Protecto 401. No lining shall take place when the substrate or ambient temperature is below 40 degrees Fahrenheit. The surface also must be dry and dust free. If flange pipe or fittings are included in the project, the lining shall not be used on the face of the flange.

D. Coating of Bell Sockets and Spigot Ends

Due to the tolerances involved, the gasket area and spigot end up to 6 inches back from the end of the spigot end must be coated with 6 mils nominal, 10 mils maximum using Protecto Joint Compound. The Joint Compound shall be applied by brush to ensure coverage. Care should be taken that the Joint Compound is smooth without excess buildup in the gasket seat or on the spigot ends. Coating of the gasket seat and spigot ends shall be done after the application of the lining.

E. Number of Coats

The number of coats lining material applied shall be as recommended by the lining Manufacturer. However, in no case shall this material be applied above the dry thickness per coat recommended by the lining Manufacturer in printed literature. The maximum or minimum time between coats shall be that time recommended by the lining material Manufacturer. **To prevent delamination between coats, no material shall be used for lining which is not indefinitely recoatable with itself without roughening of the surface.**

F. Touch Up & Repair

Protecto Joint Compound shall be used for touch-up or repair in accordance with Manufacturer's recommendations.

203.1.6.4 Inspection and Certification

A. Inspection

1. All ductile iron pipe and fitting linings shall be checked for thickness using a magnetic film thickness gauge. The thickness testing shall be done using the method outlined in SSPC-PA-2 Film Thickness rating.

2. The interior lining of all pipe barrels and fittings shall be tested for pinholes with a nondestructive 2,500 volt test. Any defect found shall be repaired prior to shipment.
3. Each pipe joint and fitting shall be marked with the date of application of the lining system along with its numerical sequence of application on that date and records maintained by the applicator of his work.

B. Certification

The pipe or fitting Manufacturer must supply a certificate attesting to the fact that the applicator met the requirements of this Specification, and that the material used was specified.

203.1.6.5 Handling

Protecto 401 lined pipe and fittings must be handled only from the outside of the pipe and fittings. No forks, chains, straps, hooks, etc. shall be placed inside the pipe and fittings for lifting, positioning, or laying.

203.2 JOINTS

- 203.2.1 Cast iron and ductile iron pipe and fittings shall be jointed with any of the end types as specified below, unless a particular end type is specified. Fittings shall have mechanical joints, unless otherwise specified. Flanged ends shall be used only where specifically noted on the Drawings, except that the valve connection end of all tapping sleeves shall be flanged.
- 203.2.2 Mechanical joints and push-on joints shall conform to, and be tested in accordance with, the American National Standard for Rubber Gasket Joints for Ductile-Iron and Gray-Iron Pressure Pipe and Fittings, ANSI/AWWA C111/A21.11.
- 203.2.3 Flange joints shall conform to the American National Standard for Cast Iron Pipe Flanges and Flanged Fittings, ANSI B16.1.
- 203.2.4 Where ductile or cast iron pipe is to be tapped, a split case iron or a flexible stainless steel tapping sleeve may be used.
- 203.2.5 Split case iron tapping sleeves shall be of 150 psi working pressure. Sleeve body shall be cast iron conforming to ANSI/AWWA C110. Sleeve shall have mechanical joints conforming to AWWA C111 on the run and a flange branch conforming to ANSI B16.1, Class 125. End gaskets shall be natural rubber or neoprene material conforming to ANSI/AWWA C111.
- 203.2.6 Flexible stainless steel tapping sleeves shall be rated at 150 psi pressure, with flanges meeting AWWA C207. Assembly shall be NSF or UL rated. Bolts, nuts, and washers shall be stainless steel. Gaskets shall conform to ANSI/AWWA C111.

- 203.2.7 Openings of the sizes shown on the drawings shall be furnished with steel blind flanges of proper strength to withstand working pressure of the line where no other provision is made for closing the openings. Blind flanges shall be fabricated from material as specified under ANSI/AWWA C200. All bolts shall be carbon steel ANSI/ASTM A307, Grade A only, in accordance with ANSI/AWWA C207.
- 203.2.8 Where restrained joints are specified or required, they shall be of a mechanical type assembly easily removed in field once assembled without special equipment. Assemblies shall be ANSI/AWWA rated. Setscrew type retainer glands will not be permitted.

203.3 COATING, LINING AND POLYETHYLENE WRAP

- 203.3.1 Cast iron and ductile iron pipe and fittings shall be bituminous coated outside and cement-mortar lined inside with seal coat in accordance with American National Standard for Cement Mortar Lining for Ductile-Iron and Gray-Iron Pipe and Fittings for Water, ANSI/AWWA C104/A21.4.
- 203.3.2 All ductile iron and cast iron pipe and fittings shall be encased with polyethylene tube in accordance with AWWA C105, American National Standard for Polyethylene Encasement for Ductile Iron Piping for water and other liquids. Polyethylene film shall be manufactured of virgin polyethylene material conforming to ASTM D-1248, Type 1, Class A or C, Grade E. Thickness shall be not less than 8 mils (0.008 in.). Tensile strength shall be 1200 psi, minimum. Elongation shall be 300 percent, minimum. Tube length shall provide at least one (1) foot of overlap at each joint of pipe. Tape shall be a 2" width, plastic backed adhesive tape, Polykan #900, Scotch #50, or equal. Tube width for each pipe diameter shall be as follows:

Nominal	Push-On Joint	Mechanical Joint
<i>Pipe Sizes</i>	Flat <i>Tube Width</i>	Flat <i>Tube Width</i>
4"	14"	16"
6"	17"	20"
8"	21"	24"
10"	25"	27"
12"	29"	30"
14"	33"	34"
16"	37"	37"
18"	41"	41"
20"	45"	45"
24"	53"	53"
30"	67"	67"
36"	81"	81"

203.4 GATE VALVES

- 203.4.1 Where gate valves are specified, they shall be resilient-wedged.
- 203.4.2 Resilient-wedged gate valves shall conform to and be tested in accordance with ANSI/AWWA C509. The valve shall be bubble tight from either direction at the rated design pressure of 200 psi. The valve shall have a single disc gate with synthetic rubber seat bonded or mechanically attached to the disc; non-rising stem with 2-inch AWWA operating nut; counter clockwise opening, "O" ring stem seals, and corrosion resistant interior coating acceptable for potable water use.
- 203.4.3 Where specified, flanges shall be ANSI B16.1, Class 125, cast iron. Mechanical Joint, push-on, and bell and spigot joints are allowed.

203.5 BALL VALVES

- 203.5.1 Ball valves shall conform to and be tested in accordance with the AWWA Standard for Ball Valves, ANSI/AWWA C507. Where ball valves are specified or required, they shall be: double-seated with natural or synthetic rubber located in the valve body. Ball seating surfaces shall be stainless steel; designed for 150 psi working pressure; flanged end; "O" ring rotor bearing seals; constructed of high-tensile strength cast iron; counter-clockwise opening; equipped with totally enclosed manual operators, and torque limiting control device. Valves shall be tested by, and shall withstand without leak, a hydrostatic pressure of: (1) 250 psi on the valve body with rotor in the open position; and (2) 150 psi on the side of the valve with the opposite side open to atmosphere. Six (6) copies of the test results and Manufacturer's drawings shall be submitted for approval prior to delivery of the valve.
- 203.5.2 Valves shall be bubble tight at rated pressure with flow in either direction.
- 203.5.3 Where flanges are specified they shall be ANSI B16.1, Class 125, cast iron flanges.

203.6 BUTTERFLY VALVES

- 203.6.1 Butterfly valves shall be of the tight-closing, rubber-seat type, shall have a rated pressure of 150 psig, and shall be bubble-tight at this pressure with flow in either direction. Valve opening shall be counter-clockwise. The valves shall conform to and be tested in accordance with the AWWA Standard for Rubber-Seated Butterfly Valves, ANSI/AWWA C504, Class 150B. The valve body shall be of the short-body flange type, constructed of cast iron conforming to either ASTM A126, Class B, or ANSI/ASTM A48, Class 40 or ductile iron ANSI/ASTM A536, Grade 65-45-12. Flanges shall be ANSI B 16.1, Class 125, cast iron flanges. Valve Discs shall be constructed of alloy cast iron conforming to ANSI/ASTM A436, Type 1, or cast iron conforming to ANSI/ASTM A48, Class 40, or ductile iron ANSI/ASTM A536, Grade 65-45-12. Valve shafts shall be constructed of 18-8, Type 304 or 316 stainless steel, ANSI/ASTM A296, Grade CF8, or monel. Valve seats shall be body mounted and shall be of natural or synthetic rubber compound with mating seat surfaces of

18-8, Type 304 or 316 stainless steel, or alloy cast iron conforming to ANSI/ASTM A436, Type 1, or bronze Grade A, D, or E. Valve bearings shall be corrosion resistant and self-lubricating.

- 203.6.2 Interior surfaces of the valve, except seating surfaces, shall be epoxy coated in accordance with AWWA Standard for Protective Interior Coatings for Valves and Hydrants, AWWA C550. Exterior surface of the valve shall be painted with two (2) coats of asphalt varnish conforming to Federal Specifications TT-V-51C. For non-buried service, exterior surface shall be coated with two (2) coats of epoxy, not zinc chromate.
- 203.6.3 Performance, hydrostatic and leakage tests shall be conducted in strict accordance with ANSI/AWWA C 504, except that the leakage tests as outlined in Section 5.3 are to be conducted on both faces of the disc.
- 206.6.4 Six (6) certified copies of the Manufacturers detail drawings shall be submitted for approval prior to delivery of the valve.
- 206.6.5 Six (6) certified copies of the test results, signed by a registered professional engineer, are to be furnished to the Engineer.

203.7 MANUAL OPERATORS FOR BALL VALVES AND BUTTERFLY VALVES

- 203.7.1 Manual Operators for Ball and Butterfly valves shall be totally enclosed, permanently lubricated, counter-clockwise opening, and designed for buried or submerged service. Manual Operators shall be equipped with a 2" square AWWA operating nut with a removable handwheel complete with spinner and an open-closed indicator, suitable for one-man operation at 150 psi unbalanced across the valve. Manual Operators shall be either worm gear or traveling-nut type, and shall conform to AWWA C507 for Ball Valves or AWWA C504 for Butterfly Valves.
- 203.7.2 Manual Operators for Ball and Butterfly Valves 16" and larger shall be equipped with a Torque Limiting Control Device. The device shall be mounted directly on the operating nut for valves in vaults and on top of the extension shaft for buried valves. The device shall be secured to the operating nut with two setscrews. The device shall declutch at 200 lb-ft of input torque in either direction of rotation. The device shall be designed for permanent buried or submerged service. Declutch and reset shall be automatic. Repeatability shall be within 5 percent of original rating for a minimum of 1000 cycles. Certified proof-of-design test reports shall be furnished for the device.

203.8 AIR RELIEF VALVES

Where air relief valves are specified or required, the valve shall be heavy-duty combination air release and vacuum type for 150 psi working pressure, tested to 300 psi, size shown on plans. Body, cover, and baffle shall be cast iron. All internal parts to be either highest quality stainless steel or bronze, and the inside of valve coated with rust inhibitor.

203.9 CHECK VALVES

Where check valves are specified or required, they shall conform to, and be tested in accordance with the AWWA Standard for Swing-Check Valves for Ordinary Water Works Service, AWWA C508. They shall be horizontally mounted, single disc, swing type with a full diameter passage providing minimum pressure loss. Valves shall be of the non-slamming type designed for the future installation of outside lever and weight. Unless otherwise specified, all check valves installed in pump or lift stations shall be equipped with an outside lever and spring. Disc faces and seat rings shall be bronze. Ends shall fit the pipe or fitting to which attached (push-on, mechanical, bell and spigot, or flanged).

203.10 3-WAY FIRE HYDRANTS

203.10.1 Where fire hydrants are specified, they shall conform to, and be tested in accordance with the AWWA Standard for Dry-Barrel Fire Hydrants, ANSI/AWWA C502. All hydrants shall have: breakable connection features and a breakable coupling on the stem immediately above the bury line which has a lower breaking point than the rest of the unit; 5¼-inch compression main valve; 6-inch inlet connection; standard bell or mechanical joint hub; four-foot six-inch bury length, or as specified on drawings; two 2½-inch hose nozzles with National Standard threads; one 4-inch pumper nozzle with Bixby Standard threads (refer to attached Standard Detail for Fire Hydrants); "O" ring seal; drain valve; left (counter-clockwise) opening; Federal yellow finish paint above ground line; and National Standard pentagon operating nut.

203.10.2 Where fire hydrant extensions are specified or required, they shall be of proper design to accommodate the make of fire hydrant installed.

203.11 FOUR-WAY FIRE HYDRANT

203.11.1 Where four-way fire hydrants are specified or required, they shall conform to, and be tested in accordance with the AWWA Standard for Dry-Barrel Fire Hydrants, ANSI/AWWA C502. All hydrants shall have: breakable connection features and a breakable coupling on the stem immediately above the bury line which has a lower breaking point than the rest of the unit; 8-inch inlet connection; bell, flange, or mechanical joint inlet; four-foot six-inch bury length; two 2½-inch hose nozzles with National Standard threads; two 4-inch pumper nozzles with Bixby Standard threads; "O" ring seal; drain valve; left (counter-clockwise) opening; Federal yellow finish paint above ground line; and National Standard pentagon operating nut.

203.11.2 Where fire hydrant extensions are specified or required, they shall be of the proper design to accommodate the make of fire hydrant installed.

203.12 BLOW-OFF HYDRANT

Where blow off hydrants are specified or required, they shall be constructed in accordance with Construction Standard Blow-off Hydrant.

PART 204 - STEEL PIPE AND FITTINGS

204.1 GENERAL

- 204.1.1 Where steel pipe is specified or required, it shall conform to the AWWA Standard for Steel Water Pipe, 6-Inches and Larger, AWWA C200. No steel less than 33,000 psi specified minimum yield strength shall be permitted. All pipe shall be hydrostatically tested in accordance with AWWA C200. Mill Test Reports shall be furnished and the hydrostatic test pressure shown on shop fabrication drawings. AWWA Designation C200 shall govern the testing. Pipe length shall be not less than 35 feet per joint, except for specials, unless otherwise noted. There shall be no more than one longitudinal or girth seam per section. Nominal pipe diameter and steel thickness shall be as specified on the drawings. The diameter shown is the required inside diameter of cement-mortar lining. All pipe shall be manufactured by an established Manufacturer who has had at least three (3) years experience in successfully building this type of pipe. Openings for air valves, main connections, and blow-off connections shall be provided with suitable reinforcements around the opening, welded to the body of the pipe in accordance with AWWA Manual M11. Openings of the sizes shown on the drawings shall be furnished with steel blind flanges of proper strength to withstand the working pressure of the line where no other provision is made for closing the openings. Blind flanges shall be fabricated from material listed above as specified under AWWA C200. All bolts shall be carbon steel ANSI/ASTM A307, Grade A only, in accordance with ANSI/AWWA C207. For corrosion monitoring of steel pipe, junction box test stations shall be furnished and installed. Magnesium anode banks shall be furnished and installed where specified in the plans. Junction box test stations and anode banks shall be installed in accordance with the stationing as shown on the Schedule of Anode Spacing in the plans.
- 204.1.2 All steel pipe shall be manufactured with ends of true circular shape, free from indentations, projections, or roll marks for a distance of eight inches (8") from the end of the pipe. This shall be done by hydraulic expansion or some other method satisfactory to the Engineer. The outside diameter of the pipe shall be true enough in dimension to permit the passage for a distance of eight inches (8") from the end of the pipe a ring gauge with a bore three-thirty seconds of an inch larger than the outside diameter of the pipe.
- 204.1.3 Where steel fittings or specials are specified or required, they shall conform to all of the Steel Pipe Specification requirements and to the AWWA Standard for Dimensions for Steel Water Pipe Fittings AWWA C208. Where fittings and specials are fabricated from mill pipe, they shall be fabricated from pipe hydrostatically tested in accordance with AWWA C200 with mitered joints dye checked for welding flaws. Changes in line and grade shall be made by steel specials or in the joints. Joint deflection shall not exceed that as recommended by the Manufacturer. Inside diameter of steel specials and fittings shall be the required inside diameter of cement-mortar lining.

204.1.4 Where field cutting of steel pipe is permitted, pipe shall be cut by sawing. The inside lining shall be removed for a minimum of six inches each side of the cut and the pipe surface shall be cleaned and brushed to bright metal. After welding, the inside lining shall be replaced in accordance with AWWA C602.

Minimum thickness of steel pipe shall be 0.25 inches. The minimum thickness standard in inches for each following size pipe shall be as follows:

Minimum Thickness - Inches for Grade of Steel

Nominal Pipe Diameter	A-283 Gr. D	A-53 Gr. B	A-139 Gr. C
6" ~ 30"	A-570 Gr. 33	A-135 Gr. B	A-572 Gr. 42
		A-139 Gr. B	
		A-36	
36"	0.313	0.250	0.250
42"	0.313	0.281	0.250
48"	0.375	0.313	0.281
54"	0.438	0.375	0.313
60"	0.500	0.406	0.344
66"	0.500	0.438	0.375
72"	0.563	0.500	0.406

204.1.6 The design criteria for steel pipe thickness is based on 150 psi working pressure plus a 75 psi allowance for water hammer. Maximum depth of cover shall be 12 feet. Depth of cover in excess of 12 feet shall require special design.

204.2 JOINTS

204.2.1 Steel Pipe and fittings shall have one of the following type joints: slip joint ends for field lap welding, single beveled ends for field butt welding, double beveled ends for field butt welding, "O" ring bell and spigot joints, or plain ends for mechanically coupled field joints. Flange ends shall be used only when noted on the drawings.

204.2.2 Welded joints shall conform to, and be tested in accordance with the AWWA Standard for Field Welding of Steel Water Pipe Joints, AWWA C206. Slip joints for field lap welding shall be sized to provide a tolerance of not less than 0.09 inches and not more than 0.41 inches difference in measurement between the outside circumference of the spigot end and the inside circumference of the bell end.

204.2.3 Mechanically coupled joints shall consist of Dresser Couplings, Style 38, or equal, or as specified on the drawings. The harness lugs, tie bolts, and nuts shall conform to AWWA M11 Steel Pipe Design and Installation, Par. 19.8.

204.2.4 Bell and spigot joints with rubber gasket shall conform to the AWWA Standard for Steel Water Pipe 6-Inches and Larger, AWWA C200 and the AWWA Steel Pipe Manual, MII. The gasket shall be a continuous "O" ring design of natural rubber or neoprene and shall be of suitable cross-section and size to assure a watertight joint. Acceptable bell and spigot joints for all steel pipe diameters and thicknesses shall be

the "O" Ring-Bar Type, or the "O" Ring-Carnegie Section, or rolled groove type joint. Bell and spigot ends shall be properly sized by forcing over a sizing die or by expanding to stretch the steel beyond its elastic limit so that the difference in diameter between outside of spigot and inside of bell at normal engagement is not less than .03" and not more than 0.10" as measured on circumference with a diameter tape. Shop applied interior lining on the bell end of the pipe shall be held back a minimum distance of the spigot engagement + 1-1/8" for the Bar and Carnegie Type Joints. Hold back for the rolled groove joint shall be the spigot engagement + 1/2". Interior lining for the spigot, shall be continuous to the end. Field replacement of the interior joint linings shall be in accordance with Section 203.4. of these Specification for cement-mortar linings. All "O" Ring joints shall be electrically bonded using a #4 bare copper wire, 6" length #15 cadweld cartridge brazed to bare metal at the bell and spigot or equal. Shop applied exterior coatings shall be held back in accordance with Manufacturer's Specifications. Field replacement of exterior coatings at the joints shall be in accordance with the AWWA Standard for Cold-Applied Tape Coatings for Special Sections, Connections, and Fittings, for Steel Water Pipelines, AWWA C209, or AWWA C203 Coal-Tar Protective Coatings and Linings for Steel Water Pipelines, Enamel and Tape, Hot Applied, or AWWA C205, Cement-Mortar Protective Lining and Coating for Steel Water Pipe, 4" and Larger, Shop Applied.

204.2.5 Where steel pipe is to be tapped, a split tapping saddle of 150 psi working pressure shall be used. The saddle body shall be heavy welded ANSI/ASTM A36, or ANSI/ASTM A285, Gr. C steel with flange conforming to ANSI/AWWA C207, Class D. The gasket shall be natural rubber or neoprene design in a continuous ring of suitable cross-section, and sized to assure a watertight joint. The interior and exterior surfaces of the saddle body shall be shop coated with a fusion-bonded epoxy. The exterior coating or wrap on steel pipe shall be removed to bare metal beneath the entire area to be covered by the sleeve.

204.2.6 Flanged joints shall conform to the AWWA Standard for Steel Pipe flanges, AWWA C207, Class D.

204.3 EXTERIOR COATING

204.3.1 The exterior coating on steel pipe and fittings shall be in accordance with Coal Tar Protective Coatings and Linings for Steel Water Pipelines, Enamel and Tape, Hot Applied, AWWA C203; or Tape Coating Systems for the Exterior of Water Pipelines, AWWA C214 or cement-mortar coatings in accordance with AWWA C205, Cement-Mortar Protective Lining and Coating For Steel Water Pipe, 4" and Larger, Shop Applied. Where tape coatings are used, the total thickness shall be no less than 80 mils. Where cement-mortar coating is used, the thickness shall be not less than 3/4" and reinforced with spiral-wire, wire-fabric, or ribbon mesh reinforcement in accordance with AWWA C205, Sec. 2.1. All above ground piping shall be cleaned, primed, and painted with an enamel, as shown in the plans. The total dry film thickness shall be 6 mils.

204.3.2 If field welding is used, the pipe joints shall be furnished with the outside coating held back, in accordance with standard joint detailed drawings. The coating and any touch up work shall be done under the direction of the coating Manufacturer, and as approved by the Engineer.

204.4 INTERIOR LINING

204.4.1 The interior lining shall be installed in the field in accordance with AWWA C602, Cement-Mortar Lining of Water Pipelines, 4-Inch and Larger, In Place; or shop applied in accordance with AWWA C205, Cement Mortar Protective Lining and Coating for Steel Water Pipe, 4" and Larger, Shop Applied. The lining shall be 3/8" thick for diameters through 36", and 1/2" thick for 42" and larger, whether shop or in place lined. Tolerances shall be in accordance with the applicable AWWA standards. Coal-tar enamel and coal tar epoxy interior linings will not be permitted.

204.4.2 Where in place cement-mortar lining is used, the contractor shall furnish all materials, labor, equipment, prepare the interior surface, and machine place the mortar lining in the pipe. The lining at valves, specials, and bends may be hand sprayed or troweled, or hand applied as required. The lining shall be maintained in a moist condition while curing. The contractor shall be responsible for any extended curing time until acceptance by the Engineer. No additional payment shall be made for any extended curing period.

204.4.3 Where in-place mortar lining is cracked or delaminated from steel cylinder pipe, contractor shall repair broken or delaminated areas with Hilti 2-part epoxy, or approved equal.

204.5 STRUTTING AND BRACING

Strutting and bracing shall be provided on all specials, fittings, and straight pipe, where shop lined or coated with cement mortar, so as to limit the pipe deflection to 2% maximum of inside diameter. A minimum of three strutting braces shall be installed in each standard pipe joint. For pipe 54" and larger in diameter, the strutting shoes at each bearing point shall be minimum 4 feet long, parallel to the longitudinal pipe axis. The strutting shall remain in place until all compacting and backfilling has been completed. Where In Place cement mortar lining is to be installed, sufficient strutting braces subject to the approval of the engineer, shall be installed at the shop to insure against pipe deformation.

PART 205 - REINFORCED CONCRETE PIPE AND FITTINGS

205.1 REINFORCED CONCRETE PIPE AND FITTINGS FOR WATER AND SANITARY SEWER LINES

205.1.1 Where reinforced concrete pipe (RCP) and fittings are specified or required per AWWA C301, for water or sanitary sewer lines, they shall be designed, manufactured, and tested in accordance with the AWWA Standard for Prestressed Concrete Pressure Pipe, Steel Cylinder Type, for Water and Other Liquids, AWWA C301, or Reinforced Concrete Pressure Pipe, Steel Cylinder Type, Pretensioned, for Water and other Liquids, AWWA C303. All pipe shall be manufactured by an established Manufacturer who has had at least three years experience in successfully building this type of pipe. All specials and fittings shall be built to the details furnished by the Manufacturer and approved by the Engineer. Each special and each length of straight pipe shall be plainly marked to indicate the head for which the pipe is designed and to indicate where the pipe will be used by reference to the layout drawings. All closure fittings shall be furnished with an 18-inch flanged access manway with an 18-inch steel blind flange. 6-inch screw type hand hole fittings will not be permitted.

205.1.2 Sanitary Sewer Prestressed Concrete Cylinder Pipe (PCCP) or Reinforced Concrete Pipe(RCP) shall have the following interior lining systems or equal:

The lining system shall be a plural component. 100% solids, moisture tolerant, epoxy primer followed with a plural component, 100% solids, polyurethane top coat. The primer shall be a Zebron Low Temperature Epoxy (ZLTE) and the topcoat shall be Zebron #486 polyurethane as manufactured by Zebron Corporation, Anaheim, CA or approved equal. The lining system shall be suitable for application by airless spray. The primer shall be applied to a thickness of 2 to 3 mils and can be top coated when the primer becomes tacky (sticky to the touch) or can be top coated during the next 8 hours. When waiting up to 8 hours to top coat the primer, special care must be taken to assure the surfaces to be top coated are not exposed to moisture, dust, or other contaminants. The topcoat shall be applied to a 50-mil thickness and shall not exhibit running, sagging, or shrinking. The lining system shall be compatible with application to cured or green (one day old) Portland cement concrete or mortar. The applied lining shall formed impermeable, pin-hole-free. Membrane, monolithically applied with tight adherence to the concrete or mortar. The cured lining shall not peel or spall from the concrete or mortar surfaces. The lining system shall be resistant to abrasion during normal pipe handling and installation.

205.1.3 All concrete or mortar substrates must be sweep-abrasive grit blasted to create adequate profile then made dust free. All surfaces to be lined must be free of any oil, grease, or other deleterious materials. The surface must be dry to the touch (no standing water), but can have some surface discoloration due to moisture.

- 205.1.4 The two-component epoxy lining for PCCP shall be tested in accordance with National Association of Corrosion Engineers Standard for Discontinuity (Holiday) Testing of Protective Coatings. Results of the Discontinuity Testing shall be furnished to the City of Bixby. Any defects shall be repaired and retested.
- 205.1.5 RCP and fittings for water lines shall be designed for the following conditions (minimum): Normal operating pressure equal to 150 psi plus 50% for surge pressure plus earth load resulting from actual backfill depth, but not less than 8 feet plus external live load equal to AASHTO HS 20 loading. The thickness of the mortar coating shall provide a minimum cover of 1 inch over the reinforcing steel.
- 205.1.6 Reinforced concrete pipe and fittings for water lines shall be jointed according to AWWA Standard for Prestressed Concrete Pressure Pipe, Steel Cylinder Type, for Water and Other Liquids, ANSI/AWWA C301, or Reinforced Concrete Pressure Pipe, Steel Cylinder Type, Pretensioned, for Water and Other Liquids, AWWA C 303.
- 205.1.7 Where concrete pressure pipe ANSI/AWWA C301, Steel Cylinder Prestressed Concrete or Pretensioned Concrete Pressure Pipe, AWWA C303 is to be tapped, the tapping saddle shall be fabricated in accordance with the American Water Works Association Manual M-9, and as recommended by Manufacturers of Concrete Pressure Pipe. Saddle shall provide grout gaskets and grout opening to enable filling the wall space between saddle and pipe wall with grout, to assure complete protection of the steel pipe wall. The saddle shall also provide gland assembly, including gasket and flange, to insure a tight seal.
- 205.1.8 Openings of the sizes shown on the drawings shall be furnished with steel blind flanges of proper strength to withstand the working pressure of the line where no other provisions is made for closing the openings. Blind flanges shall be fabricated from material as specified under AWWA C200. All bolts shall be carbon steel ASTM A307, Grade A only, in accordance with ANSI/AWWA C207.
- 205.2 REINFORCED CONCRETE PIPE AND FITTINGS FOR STORMWATER AND SANITARY SEWERS
- 205.2.1 Where reinforced concrete pipe (RCP) and fittings are specified or required per ASTM C76, for storm and sanitary sewers, except as herein modified, they shall be designed, manufactured, and tested in accordance with ASTM C76, Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe. Pipe shall be a minimum Class III. Pipe length shall be no less than 6'-0" except for shorts and specials. Pipe sections connected to a manhole or structure shall be no more than 4' - 0" in length, as measured from the inside face of the structure to the point of flexure of the joint. Elliptical reinforcement is not allowed. At least three circumferential reinforcing bars shall be provided in each pipe bell equal in area to an equivalent length of outside cage in the pipe barrel. Concrete shall have a minimum 28-day compressive strength of 6,000 psi, and absorption not to exceed six percent.

- 205.2.2 Testing shall be observed and reported by an independent testing laboratory approved by the Engineer. One (1) Three-Edge Bearing Test in accordance with ASTM C497 shall be performed on a representative sample of each diameter and class of pipe to be furnished. One (1) absorption test in accordance with ASTM C497 shall be performed for each 300 tons of pipe manufactured, not less than one (1) test per day's production. Four (4) concrete cylinders or core samples shall be tested for compressive strength from each days production, two at 7 days and two at 28 days. An in-plant hydrostatic test in accordance with ASTM C361 shall be performed on each section of pipe and each pipe joint at an internal hydrostatic head of 25 feet. The joints shall be tested for a minimum period of one (1) hour under constant pressure as specified. Each pipe unit that satisfactorily passes all hydrostatic testing shall bear the seal of the testing laboratory. This seal does not constitute acceptance of the pipe installation, which will be subjected to further testing and inspection in the field.
- 205.2.3 In lieu of the in-plant hydrostatic testing of each joint, the Contractor may substitute the following procedure: (1) Perform one in-plant hydrostatic test per days production, in accordance with the previously specified criteria; and (2) Perform an air test on each joint in the field after assembly, in accordance with the City of Bixby Water and Sewer Department Standard Air Test Procedure. The Contractor shall furnish all air test equipment. Testing and test conclusions shall be verified by the Engineer. The Engineer reserves the right to require additional in-plant hydrostatic testing.
- 205.2.4 Reinforced concrete pipe and fittings for storm sewer shall be jointed in accordance with ASTM C361, Standard Specification for Reinforced Concrete Low-Head Pressure Pipe. Joints shall be concrete bell and spigot, employing a rubber gasket and cement mortar formed by a diaper. Rubber gaskets shall be either a standard o-ring gasket or a Forsheda pre-lubricated gasket, or equal. For the o-ring gasket, the spigot end shall contain a groove to confine and compress the gasket on four surfaces when the joint is in final position. The Forsheda joint shall be designed and installed in accordance with the Manufacturer's recommendations.
- 205.2.5 Reinforced concrete pipe and fittings for sanitary sewer shall be jointed in accordance with AWWA C302, Reinforced Concrete Pressure Pipe, Non-cylinder type. Joints shall be Steel End Ring with Spigot Grove and O-ring gasket, and include cement mortar formed by a diaper.

PART 206 - VITRIFIED CLAY PIPE AND FITTINGS

206.1 PIPE AND FITTINGS

- 206.1.1 Where vitrified clay pipe (VCP), fittings and in-line tees are specified or required, they shall conform to the Standard Specification for Vitrified Clay Pipe, Extra Strength, Standard Strength, and Perforated ANSI/ASTM C700. Testing shall be in accordance with methods of Testing Clay Pipe, ANSI/ASTM C301.

206.1.2 Where vitrified clay pipe is being installed, in-line tees for future connections to the sanitary sewer shall be manufactured specifically for vitrified clay pipe.

206.2 JOINTS

206.2.1 Vitrified clay pipe shall be jointed with material conforming to the Standard Specification for Compression Joints for Vitrified Clay Pipe and Fittings, ANSI/ASTM C425. All jointing materials shall be used in accordance with the Manufacturer's instructions and subject to the approval of the Engineer.

206.2.2 Where it is necessary to connect vitrified clay pipe to ductile iron pipe a rigid type adapter shall be used. Only the following adapters will be permitted: Dickey DPB-VC x DI, Dresser Style 39, and Rockwell Omni. Flexible couplings will not be permitted.

PART 207 - POLYVINYL CHLORIDE (PVC) PIPE, WATER SERVICE

207.1 Where polyvinyl chloride (PVC) pipe four (4) inches in diameter through twelve (12) inches in diameter is specified or required, it shall conform to and be tested in accordance with AWWA C900, "AWWA STANDARD for POLYVINYL CHLORIDE (PVC) PRESSURE PIPE, 4 IN. THROUGH 12 IN., FOR WATER", as herein modified. PVC water pipe shall be approved by the Underwriters Laboratory Sanitation Foundation Testing Laboratory for potable water pipe.

207.2 PVC pipe shall conform to pressure Class 200 (equivalent to Dimension Ratio 14) and shall have an outside diameter (OD) equal to the OD of equivalent size ductile iron pipe.

207.3 PVC pipe shall have integral wall-thickened bell ends and shall be jointed using one-piece elastomeric gaskets. Solvent cement jointing shall not be permitted.

207.4 Fittings for PVC pipe shall be polyethylene wrapped ductile or cast iron conforming to Section 202 of these Specifications. The use of PVC fittings shall not be permitted.

207.5 Contractor shall submit certifications from the Manufacturer that PVC pipe has been manufactured in accordance with AWWA C900, and that it meets the approval of the "NSF".

207.6 Where restrained joints are required, they shall be of a mechanical type assembly easily removed in field once assembled without special equipment. Assemblies shall be ANSI/AWWA approved. Set screw type retainer glands may only be used after prior approval by the Engineer.

PART 208 - POLYVINYL CHLORIDE (PVC) PIPE, SEWER SERVICE

- 208.1 Where polyvinyl chloride (PVC) pipe eight (8) inches in diameter through fifteen (15) inches in diameter, fittings and inline tees are specified or required for sewer service, it shall conform to and be tested in accordance with ASTM D3034 "Type PSM Polyvinyl Chloride Sewer Pipe and Fittings" for standard dimensional ration (SDR) of 35. Minimum pipe stiffness for all sizes shall be 46 psi.
- 208.2 Where polyvinyl chloride (PVC) pipe 18-inches in diameter through 36 inches in diameter is specified or required for sewer service it shall conform to and be tested in accordance with ASTM F679, Polyvinyl Chloride (PVC) Large Diameter Plastic Gravity Sewer Pipe and Fittings. Minimum pipe stiffness shall be 46psi.
- 208.3 The PVC sewer pipe shall be supplied in 12.5 foot, or 20 foot laying lengths as specified.
- 208.4 Where it is necessary to connect PVC sewer pipe to ductile iron pipe and AWWA C110 long body solid sleeve shall be used with a special gasket for the PVC pipe. Flexible couplings will only be permitted with prior approval of the Engineer.
- 208.5 Where PVC sewer pipe is being installed, the fittings for the service line and the in-line tees for future service connections shall be manufactured and specifically designed for Schedule 40 PVC service lines.
- 208.6 The Manufacturer shall maintain quality control through regularly scheduled testing in accordance with all referenced ASTM standards. Testing for flattening and the pipe stiffness shall be performed on one test specimen for each size and class of pipe produced for the project. Certifications shall be furnished that the material was manufactured, sampled, tested, and inspected in accordance with all applicable Specifications. The certifications shall indicate the Manufacturer's production code from which the plant location, machine, and date of manufacture can be identified.

PART 209 - CASTINGS

- 209.1 Gray iron castings shall conform to and be tested in accordance with the Standard Specification for Gray Iron Castings ASTM A48 and applicable sections of Drainage Structure Castings, AASHTO M 306, current edition. All castings, including manhole steps, lamphole covers, water meter lids, manhole frames and lids, adjustment rings and valve boxes shall be Class 35B iron.
- 209.1.1 Iron class shall be determined using only those guidelines outlined in ASTM A48. Tensile specimens shall be obtained using AASHTO M306 Para 9.1.4, Acceptance on the Basis of Test Bars Cut from Portions of Units Supplied to Purchaser. Where samples are too thin and cannot be obtained under ASTM M306 Para 9.1.4, specimens shall be obtained under ASTM M306 Para 9.1.3 Acceptance on the Basis of Cast-on Test Bars. Elapsed time during tensile test shall follow ASTM A48 para

14. Tensile test specimens shall fit the holders of the testing machine in a way such that the load will be axial.

- 209.1.2 Additionally, castings that are rated for traffic loadings within dedicated public rights-of-way or other locations subject to vehicular traffic must pass an AASHTO proof load test that can maintain a 40,000 lb proof load for one (1) minute, applied on a 9"x9" contact area in the center of the casting. The load shall be applied at a constant rate requiring a minimum of 30 seconds to reach the 40,000 lb level. Following this test the casting shall be visually inspected for cracks or permanent deformation which will be cause for rejection. Following this, the casting shall be loaded to failure.
- 209.1.3 Cost for tensile and proof load testing shall be borne by Manufacturer, and testing shall be performed at a testing facility acceptable to the Bixby Public Works. All tests shall be witnessed by the Bixby Public Works.
- 209.2 Casting dimensions shall vary by not more than $\pm 1/16$ inch per foot.
- 209.3 All bearings surfaces shall be machined to prevent rocking and rattling.
- 209.4 Where sealed manholes are specified, only McGard locking system with 5/8" – 11 thread which is keyed to City of Bixby standard lock is allowed.
- 209.5 Only those castings which have been approved by the Bixby Public Works Department will be permitted. Approval for each casting shall consist of approved shop drawings, plus laboratory test reports of the tensile test and load test.
- 209.6 Bixby Public Works, on an annual basis, reserves the right to randomly select any castings for tensile and proof load testing from the foundry's local representative's yard. Such testing shall be at Manufacturer's expense.

PART 210 - CONDUIT

Where conduit (also known as tunnel liner or pipe sleeve), 6 inches or larger, is specified or required, it shall be steel pipe, and be in accordance with AWWA C200, 3/8" wall thickness. Conduit shall be sized according to the following:

Carrier Pipe		Conduit, ID
<i>Water</i>	<i>Sanitary Sewer</i>	
6"	6"	18"
8"	8"	20"
	10"	22"
12"		24"
	12"	26"
	15"	28"
16"		30"
	16"	32"
	18"	32"
24"	24"	42"
30"	30"	48"
36"	36"	54"
42"		60"
	42"	62"
	48"	68"

PART 211 - VAULT, PITS AND MANHOLES

- 211.1 Concrete masonry units shall conform to, and be tested in accordance with the Specifications for Concrete Masonry, Hollow Load Bearing Concrete Masonry Units, ANSI/ASTM C90, or Concrete Building Brick C55, Grade A.
- 211.2 Precast manholes shall conform to, and be tested in accordance with, the Specifications for Precast Reinforced Concrete Manhole Sections, ANSI/ASTM C478, flat slab top type.
- 211.3 Manhole adjusting ring shall be solid cast iron that fits in the standard City of Bixby Sanitary Sewer manhole frame and the standard manhole lid fits in the adjusting ring.
- 211.4 Adjusting rings shall conform to and be tested in accordance with the Standard Specification for Gray Iron Castings ASTM A48 and Drainage Structure Castings, AASHTO Designation: M306-89. Castings shall be Class 35-B iron and unpainted.
- 211.5 The contact surface between manhole ring and manhole frame and the contact surface between manhole ring and manhole lid shall be machined smooth to prevent rocking and rattling.

- 211.6 The two (2) inch manhole adjusting ring where specified shall have a minimum weight of 70 pounds and the three (3) inch manhole adjusting ring where specified shall have a minimum weight of 100 pounds.
- 211.7 Markings on all gray iron castings shall conform to AASHTO Designation M306-89. (AASHTO M306-89 states: Each casting shall be identified by the foundry showing): Name of Foundry, Country of Manufacturer, ASTM Designation Number, Class by a number followed by a letter indicating the minimum tensile strength and size of test bar. (i.e. Class 35-B), Heat Number and Date. No other wording or marking of any kind other than those stated above or shown on the plan will be permitted on castings.
- 211.8 All sanitary sewer manholes and structures 5-foot I.D. or larger shall have an interior epoxy coating 80 mils thick. The coating shall be Raven 405 or equal. The coating shall be installed per Manufacturer's recommendations and Specifications. The Contractor shall provide a full warranty for at least one (1) year against defects in materials and workmanship, unless otherwise noted.

PART 212 - SAND FOR CUSHION OR BACKFILL

Sand shall be graded from fine to coarse, free from objectionable material, and contain not more than ten percent (10%) clay or loam by weight. One hundred per cent shall pass a three-quarter inch screen, and ninety-five per cent shall pass a number four screen.

PART 213 - CRUSHED STONE FOR SURFACING, BASE COURSE, AND STABILIZATION

- 213.1 Crushed stone shall consist of clean, tough, durable fragments, free from an excess of soft or disintegrated particles. Sampling shall be in accordance with the Standard Method of Sampling Aggregates, ANSI/ASTM D 75. Sieve analysis shall be performed in accordance with the method of Sieve Analysis, ANSI/ASTM C136. Gradation to be used at each location will be specified by the Engineer. Crushed stone for aggregate base and surface course shall conform to the Oklahoma Department of Transportation Specifications for Highway Construction, and shall conform to the following gradations:

213.2 Percent Passing

Sieve Size	Type A	Type B
3"	----	100
1-1/2"	100	40-100
3/4"	40-100	30-75
3/8"	30-75	25-60
No. 4	25-60	20-50
No. 10	20-43	15-35
No. 40	8-26	7-22

213.2.1 Crushed stone aggregate for stabilization and bedding shall conform to the following ASTM D448 and C33 gradations:

213.2.2 Percent Passing

	Size #1	Size #467	Size #57
Sieve Size	3 1/2" to 1 1/2"	1 1/2" to No. 4	1" to No. 4
4"	100	-	-
3 1/2"	50-100	-	-
2 1/2"	25-60	-	-
2"	-	10	-
1 1/2"	0-15	95-100	100
1"	-	-	95-100
3/4"	0-5	35-70	-
1/2"	-	-	25-60
3/8"	-	10-30	-
No. 4	-	0-5	0-10

	Size #67	Size #7
Sieve Size	3/4" to No. 4	1/2" to No. 4
4"	-	-
3 1/2"	-	-
2 1/2"	-	-
2"	-	-
1 1/2"	-	-
1"	100	-
3/4"	90-100	100
1/2"	-	90-100
3/8"	20-55	40-70
No. 4	0-10	0-15

PART 214 - RIP RAP

214.1 **QUALITY OF MATERIALS:** All stone for Rip Rap shall be either sandstone, limestone, or other hard stone of good quality that will not materially disintegrate under action of air or water. It shall weigh not less than 140 pounds per cubic foot as determined from the bulk specific gravity (saturated surface dry) of the sample in accordance with procedure in ANSI/ASTM Specifications C127-68, "Test for Specific Gravity and Absorption of Coarse Aggregate". Slabs or slivers shall not be used. Rocks shall be of angular shape. Gypsum, anhydrite, chert, shale, soft or weathered rock shall not be used. All stone material furnished shall be such that will yield hard, massive, heavy, durable stone, and shall be free from cracks, seams and other

defects that would tend to unduly increase its destruction by natural causes. The contractor shall furnish for the work, an approved stone of good quality. The successful bidder shall, within fifteen (15) days after receipt of notice to proceed, submit to the contracting officer for approval, three (3) samples weighing not less than 150 pounds each, of the stone he proposes to furnish. The samples shall be fairly representative of the whole quarry. If it is proposed to furnish stone for more than one quarry, samples as stated above shall be furnished from each quarry. The City will notify the contractor of acceptance or rejection of the stone samples within ten (10) days after their submittal for approval. The submission of samples will not be required if the material is to be obtained from a source previously approved by the City from test and service records.

- 214.2 TYPE "B": Type "B" rip rap material shall be quarry-run rock free from overburden spoil, and no piece shall weigh more than 500 pounds. At least forty percent (40%) of any shipment shall consist of rocks weighing 100 pounds or more. Rock shall be graded so as to produce a reasonably well-graded mass with the minimum practicable percentage of voids. Rock carrying dirt and fines less than 1/2-inch in maximum cross section, accumulated from interledge layers or from blasting or loading operations, will be accepted if such material does not exceed ten percent (10%) by weight.
- 214.3 TYPE "C": Type "C" rip rap material shall be quarry-run rock free from overburden spoil, and no piece shall weigh more than 1,000 pounds. At least forty percent (40%) of any shipment shall consist of rocks weighing 200 pounds or more. Rock shall be graded so as to produce a reasonably well-graded mass with the minimum practicable percentage of voids.

DIVISION III

CONSTRUCTION SPECIFICATIONS

PART 301 - RIGHT-OF-WAY CLEARING AND RESTORING

- 301.1 Work under this item shall include the removal and reconstruction or replacement of all obstructions affected by the construction of the project, including, but not limited to fences, retaining walls, patios, trash burners, signs, mail boxes, out-buildings, landscaping, etc. Any such obstructions that are not to be reconstructed are so designated on the drawings. Such shall be removed and disposed of by the contractor. All obstructions to be replaced or reconstructed shall be restored to substantially the same condition as existed prior to the construction except as otherwise noted. The Contractor shall remove and dispose of all debris, restore the grade of the surface of the earth as reasonably as may be done to the grade existing prior to construction, and upon completion of the work shall leave the site in as neat, clean and orderly condition as nearly as it was prior to construction as may be reasonably done. Contractor shall photograph all concrete and asphalt driveway crossings with a Polaroid type camera, in the presence of an inspector, marking the location by street address on each photo. Photographs shall be filed with this Department prior to commencing work. All costs of photography shall be included in Bid Item 301a, Right-of-way clearing and restoring.
- 301.2 Passable surfaces across or along the construction vicinity shall be maintained at all times with gravel, steel mat or plate, or temporary bituminous surfacing material where a sidewalk, driveway, parking lot, street or alley previously existed. Pavement damaged by the Contractor's equipment movement shall be replaced to original condition. Gravel surfaces shall be replaced with the same.
- 301.3 If an obstruction is of public ownership, the Contractor shall notify the appropriate agency, and obtain any necessary permit or license forty-eight hours before beginning any operations affecting the obstruction. All work shall conform to the current Standards and Specifications of that agency, and shall be approved by the agency before completion of the project. At the Contractor's request, the Engineer will furnish information as to what licenses or permits are required.
- 301.4 **PAYMENT:** Payment for this item shall be made at the unit price bid per linear foot. Total footage shall be the total length of pipe, not including bores, fittings, or specials, as included in other items. No additional payment shall be made for alterations of utility mains, service lines, or appurtenances, unless specifically provided for elsewhere in the Contract Documents.

PART 302 - EXCAVATION AND BACKFILL, UNCLASSIFIED

- 302.1 The work under this item shall include all earth, shale, gravel, loose rock, solid rock, debris, junk and/or other material excavated or otherwise removed in the preparation of the trench; all work in connection with the excavation, removal and subsequent handling and disposal of such material, regardless of its type, character, or condition; subgrade preparation, all sheeting, piling, shoring, bracing, and dewatering of trenches; protection of adjacent property; backfilling; sand cushion; grade base stabilization; all specified backfill consolidation; and other work necessary or required.
- 302.2 The trench shall be excavated so that the pipe can be laid to the alignment and grades shown on the drawings, or as directed by the Inspector. In dense or built-up areas or where unstable soils exist, the trench shall be excavated a maximum of one hundred (100) feet in advance of pipe laying. In open areas or where soil conditions permit, the trench excavation may be unlimited in advance of pipe laying, as approved by the Engineer. Opening of trenches in excess of the maximum requires specific approval of the Engineer. Trenches shall be dry when the trench bottom is prepared. The trench bottom shall be shaped so that even bearing is obtained for the barrel of the pipe with the bells unsupported. The standard trench width as shown on the Standard Detail, shall not be exceeded at any elevation below a point twelve inches above the top of the pipe. If for any reason this portion of the trench exceeds the permitted width and if the Inspector shall determine that cradling or encasement then is required, said concrete cradle or encasement shall be installed. Any part of the bottom of the trench excavated more than four inches below the specified grade shall be corrected with approved material thoroughly compacted as directed by the Inspector. In the event suitable material is not available, sand shall be used. When rock is encountered and concrete cradle is required, it shall be excavated four inches below the bottom of the pipe and the trench refilled to grade with sand. When quicksand or other unstable earth is encountered, the Contractor shall excavate to sufficient depth to permit backfilling with crushed stone in order to provide a stable base for the pipe. Trench safety shall be in accordance with applicable OSHA, State, and local regulations.
- 302.3 Bedding of pipe shall be as shown on the Standard Details. Sand shall be placed in the trench simultaneously on both sides of the pipe to an elevation of six inches above the top of the pipe, being carefully worked and hand-tamped around the pipe in order to consolidate the sand and assure excellent bedding. Backfill material shall not be placed in the trench covering the sand cushion without prior approval of the Inspector.
- 302.4 For large diameter (18" and above) flexible pipe, bedding shall be in accordance with the Bedding Detail for Large Diameter Flexible Pipe. The bedding shall be installed to the top of the pipe for the full width of the excavated trench. Precautions shall be taken to prevent flotation. Movable trench supports shall not extend lower than the top of the pipe.

- 302.5 When the type of backfill material is not indicated on the Drawings or specified, the backfill may be made with the excavated material, provided that such material, in the opinion of the Inspector is suitable for backfilling. In the event that excavated material is not suitable, sand or other approved material shall be used. From six inches above the pipe to eighteen inches above the pipe, the trench shall be backfilled by hand or by mechanical methods approved by the Inspector. Special care shall be used in placing this portion of the backfill to avoid damaging or moving the pipe. The remainder of the trench may be backfilled by mechanical methods. Backfilling operation shall be completed within one hundred (100) feet or less of the finished line at all times, as directed by the Inspector.
- 302.6 Unless otherwise directed by the Engineer, all trenches excavated across any sidewalk, driveway, parking lot or other paved area, across any traveled portion of unpaved streets or alleys, across any proposed roadways or proposed roadway fills, and as shown on the drawings shall be bedded and backfilled with Type A Crushed Stone (1-1/2" crusher run), placed in 8-inch maximum lifts and compacted to 95% Standard Proctor Density, as measured by the Nuclear Density Method. Compaction shall be done by a vibratory hand tamper. Trenches excavated across existing street or alley paving shall be backfilled in accordance with the standard detail for Pavement Removal and Replacement. For excavations where there is more than 6 feet of cover over the top of the pipe and where the trench width is sufficient for use of heavy compaction equipment, an engineered fill using a suitable compactable material may be used in lieu of crusher run, if approved in writing by the Public Works Director. If the backfilling has been completed and the backfill material does not meet the requirements for compaction, all the material shall be removed and hauled from the job site and the trenches refilled with material as specified above. Failure of backfill shall be corrected immediately, as directed by the Engineer.
- 302.7 **PAYMENTS:** Payment for this item shall be made at the unit price bid per cubic yard. Volume will be computed as follows: standard trench width as given in the Standard Trench Detail; length of line, as the actual horizontal measurement along the centerline of the ditch; depth of excavation as the actual depth of ditch from the original ground surface to the flow line of the pipe as shown in the construction notes. Average end-area method of computing volume will be used. No payment for excavation will be made for material excavated outside the neat lines of the standard trench width as given in the Standard Detail. No additional payment will be made for: sand cushion; backfilling; compaction of backfill; crushed stone used for backfill under existing and/or proposed roadways, roadway fills, streets, alleys, driveways, sidewalks, parking lots or as shown on the Drawings; removing and replacing top soils and obstruction, tunneling of trees, storm sewers or other obstructions; blasting; bracing and shoring; dewatering; pumping and draining; grade base stabilization; removal of excess excavated material; or restoration of the site. It is mutually understood that subterranean water, quicksand, or other unstable earth may be encountered and the Contractor has taken such into consideration in making this bid. Where such is encountered, Contractor will be required to excavate to sufficient depth to permit backfilling with crushed stone in order to provide a stable

base for the pipe. Extra payment will not be made because of such additional excavation or because it is necessary to excavate wider than the trench width as given in the Standard Trench Detail; or for crushed stone.

PART 303 - MOBILIZATION

- 303.1 This work shall consist of the performance of construction preparatory operations, including the movement of personnel and equipment to the project site and for the establishment of the Contractor's offices, buildings, and other facilities necessary to begin work on a substantial phase of the Contract. The Engineer's field office and laboratory is a separate pay item and is not included in this work.
- 303.2 PAYMENT
 - 303.2.1 Payment shall be full compensation for performing the work specified and the furnishing of all materials, labor, tools, equipment, and incidentals necessary to mobilize and subsequently demobilize the construction preparatory operations.
 - 303.2.2 Payment for this item will be made in two installments unless the first estimate submitted is also the final estimate, in which case the total lump sum bid will be paid. The first payment of 50 percent of the lump sum Contract price will be made on the first estimate following partial mobilization and the initiation of construction work.
 - 303.2.3 The second and final payment will be made on the next estimate following the completion of substantial mobilization. The completion of the erection of materials processing plants, if any, will not be required as a condition to the release of the final payment.

PART 304 - CONTRACTOR CONSTRUCTION STAKING

- 304.1 This work shall consist of furnishing, placing, and maintaining construction layout stakes necessary for the proper prosecution and inspection of the work under the contract.
 - 304.1.1 Contractor shall exercise care in the preservation of stakes and benchmarks and have them reset when they are damaged, lost, displaced, or removed. Contractor shall use licensed land surveyor in the State of Oklahoma and suitable equipment for the layout work required.
 - 304.1.2 Contractor shall set all additional stakes needed, such as offset stakes, reference point stakes, slope stakes, pavement, curb line and grade stakes, stakes for bridges, sewers, roadway drainage, pipe underdrains, paved gutter, fence, culverts, or other structures – and any other horizontal or vertical controls necessary to secure a correct layout of the work. Stake centerline/control line of temporary features, such as shoo-fly detours. Contractor shall make stakes for line and grade adequate to

maintain the specified tolerances for the operation being performed and satisfactory to Engineer. Mark the station number and the distance from the centerline of construction on all grade stakes.

304.1.3 Contractor shall furnish platforms and equipment necessary for proper and safe access for checking the staking, and when significant errors occur, resurvey to satisfaction of the Authority.

304.1.4 Contractor shall notify Engineer immediately of plan errors. Special surveys necessary to determine corrective action shall be responsibility of Engineer.

304.2 PAYMENT

304.2.1 Payment shall be by lump sum for Contractor Construction Staking, and shall be full compensation for furnishing all materials, equipment, labor, and incidentals to complete the work as specified, including profile measurements of connecting features.

304.2.2 Payment for this item of work shall be on the following schedule:

- *25 percent on the first payment estimate*
- *25 percent when 10 percent of the contract work is complete*
- *25 percent when 50 percent of the contract work is complete*
- *20 percent when 75 percent of the contract work is complete*
- *5 percent when all construction features have been verified as properly placed and completed*

PART 305 - PIPE, VITRIFIED CLAY

305.1 The work under this item shall include furnishing, hauling, and placing and jointing of vitrified clay pipe (VCP) in the trench in specific conformity with the line and levels given.

305.2 The pipe shall be laid on a firm trench bottom, true to the lines and grades shown on the Drawings and/or as given in the field by the Inspector. Pipe shall be protected during handling against impact shocks and free fall. The laying of pipe in finished trenches shall be commenced at the lowest point, with the spigot ends pointing in the direction of flow. Pipe shall be laid continuously through new manholes if both inlet and outlet pipes are of the same size and in line. Upon completion of the manhole the invert shall be shaped. The ends of adjoining pipes shall butt against each other for their entire circumference in such a manner that there is no shoulder or unevenness of any kind. If Contractor uses batterboards, a top line shall be maintained over a span of three grade stakes when laying pipes. As each batter board is erected, the top line shall be sighted to assure the accuracy of the grade

stakes and the batterboards' settings. Any errors, discrepancies, or displacement of grade stakes shall be called to the attention of the Inspector for correction.

- 305.3 Prior to making pipe joints, all surfaces of the portion of the pipe to be jointed shall be cleaned and dried. Jointing shall be done in strict accordance with the Manufacturer's recommended procedure. Trenches shall be kept water-free during jointing and for a sufficient period thereafter to allow the joint to become fully set and completely resistant to water penetration. There shall be no realignment of the pipe after the joint is completed unless the pipe is removed and a completely new joint constructed.
- 305.4 Double joints of eight inch pipe may be prepared and laid, provided the double joints are prepared by jointing the pipe in a vertical position using a straight edge inside the pipe to align the joint. Double joints shall not be placed in a horizontal position prior to laying unless suitably supported in racks. Double joints of pipe shall be supported at the middle joint, as well as the ends, when the pipes are lowered into the trench.
- 305.5 PAYMENT: Payment for this item shall be made at the unit price bid per linear foot of the pipe specified in the Proposal, and placed as shown on the Drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings used with drop manholes.

PART 306 - PIPE, REINFORCED CONCRETE

- 306.1 The work under this item shall include furnishing, hauling, placing and jointing of reinforced concrete pipe (RCP) in the trench in specific conformity with the lines and levels given.
- 306.2 For water and sewer lines, the American National Standard for Installation of Gray and Ductile Cast-Iron Water Main and Appurtenances, AWWA C-301, shall govern the installation as applicable. The method of bedding shall be in accordance with Manufacturers Specifications and recommendations. The Drawings show the plan and grade for the pipeline. The Contractor shall submit detailed drawings to the Engineer for approval, showing the proposed method of laying and bedding detail for the pipe to these grades. All pipelines to be crossed shall be located before these drawings are prepared. The ends of the pipes to be jointed shall be cleaned immediately prior to jointing and the rubber gasket thoroughly lubricated with vegetable soap before it is placed in position on the spigot end. Extreme care shall be taken in moving the spigot end of the pipe into the bell end of previously laid pipe. If the gasket is damaged or moved out of place, the new pipe shall be removed and a new gasket applied before rejoining. Any soap remaining on the exposed concrete surfaces inside or outside the pipe shall be completely removed. Fittings or specials included as pipe shall be blocked in accordance with the Standard Detail.

- 306.3 For sanitary and storm sewers, the methods of laying pipe, foundation, and grade specified under Pipe, Vitrified Clay, shall apply. All pipe shall be installed with the mark "C-76" visible on the top of the pipe. The ends of the pipes to be jointed shall be cleaned immediately prior to joining and the rubber gasket. Extreme care shall be taken in moving the spigot end of the pipe into the bell end of previously laid pipe. If the gasket is damaged or moved out of place, the new pipe shall be removed and a new gasket applied before rejoining.
- 306.4 For all lines, after the pipe has been jointed, a band at least five-and-one-half inches wide shall be placed around the outside of the pipe at the joint. This band shall serve as a form for placing 1:1 cement mortar grout in the external recess formed by the face of the groove and the shoulder of the tongue. If a reinforced paper joint band is used, it shall be drawn up tight around the pipe and the backfill tamped against it up to the spring line before pouring the grout. If a cloth band is used, it shall be wired around the outside of the pipe, and the grout poured before backfilling. On all pipes, the joint space remaining on the inside of the pipe shall be filled with a stiff mixture of 1:1 cement mortar which shall be troweled in place to produce a continuous, smooth, flush surface across the joint.
- 306.5 PAYMENT: Payment for this item shall be made at the unit price bid per lineal foot of pipe of the type specified in the Proposal, and placed as shown on the Drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings used with drop manholes, for fittings or specials included as pipe, or for concrete blocking or interior coatings.

PART 307 - DUCTILE IRON

- 307.1 The work under this item shall include furnishing, hauling, placing, and jointing of Ductile Iron pipe in the trench in specific conformity with the lines and levels given. All Ductile Iron pipe shall be wrapped with a loose fitting, slip-on polyethylene film. The polyethylene film shall be slipped over the end of the pipe length that has been raised above the ground at the trench side. After the joint on the pipe is made up, the one-foot length shall be slipped over the joint to form an over-or-under lap of the adjacent polyethylene tube at this point. The loosely fitting film shall then be neatly folded over the top of the joint and held in place with tape. The loosely fitting tube extending along the pipe shall be drawn up snugly and folded along the top and held in place by using short pieces of plastic tape at intervals not to exceed four (4) feet. Fittings, valves and corporation stops shall be wrapped with a section of polyethylene material split to form a flat sheet, using plastic tape to hold the material around the appurtenance. For all pipe, the American National Standard for Installation of Gray and Ductile Cast-Iron Water Mains and Appurtenances, AWWA C-600 shall govern the installation as applicable. The method of bedding shall be as shown on the Standard Detail for Thrust Blocks and Trench Conditions.

- 307.2 For water lines, all angled fittings or specials included as pipe shall be restrained, or blocked in accordance with the Standard Detail, the size to be determined by the Engineer.
- 307.3 PAYMENT: Payment for this item shall be made at the unit price bid per linear foot of pipe of the type specified in the Proposal, and placed as shown on the Drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings used with drop manholes, for fittings or specials included as pipe, interior coatings, or for concrete blocking.

Payment for any ductile iron pipe designated "restrained joint" shall include cost of all components necessary to restrain joints of pipe.

PART 308 - PIPE, STEEL

- 308.1 The work under this item shall include furnishing, hauling, placing, and jointing of steel pipe in the trench in specific conformity with the lines and levels given. For all lines, American National Standard for Installation of Gray and Ductile Cast-Iron Water Mains and Appurtenances, AWWA C-200 shall govern the installation, as applicable. The method of bedding shall be as recommended and specified by manufacturer. The Drawings show the plan and grade for the pipeline. The Contractor shall submit detailed drawings and bedding details to the Engineer for approval, showing his proposed method of laying the pipe to these grades. All pipelines to be crossed shall be located before these drawings are prepared. Fittings or specials included as pipe shall be blocked in accordance with the Standard Detail for Thrust Blocks and Trench Conditions.
- 308.2 If joints are field-welded, they shall develop the full strength of the pipe. The Contractor shall file with the Engineer a description of the method of welding which he proposes to use, the name of the individual or company who will do the welding, and a statement regarding the previous experience of such individual or company in this particular line of work. Testing shall be in accordance with Section 3.3 of AWWA C206. If requested, coupons shall be cut across the field welds and tested by a testing company approved by the Engineer and at the contractor's expense. The line may be welded continuously with provisions for slack in the line, or in sections to be lowered in the trench and connected by a position weld.
- 308.3 If joints are to be mechanically coupled, sections up to 240 feet may be coupled and lowered carefully into the ditch. Electrical continuity shall be provided at all joints. Preparation for, protection of, and repair of pipe coating and lining, and coating of mechanical couplings shall conform to the applicable section of these Specifications.
- 308.4 Field replacement of the cement-mortar interior lining shall be in accordance with the AWWA Standard for Cement-Mortar Lining of Water Pipelines, 4-Inch and Larger, In Place, AWWA C602.

308.5 PAYMENT: Payment for this item shall be made at the unit price bid per linear foot of pipe of the type specified in the Proposal, and placed as shown on the drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings used with drop manholes, for fittings or specials included as pipe, or for concrete blocking.

Payment for any steel pipe designated "restrained joint" shall include cost of all components to restrain joints of pipe.

PART 309 - POLYVINYL CHLORIDE (PVC) PIPE, WATER SERVICE

309.1 When PVC pipe is delivered to the jobsite it shall not be exposed to sunlight for more than three (3) weeks. PVC pipe exposed to sunlight for more than three (3) weeks shall be covered with an opaque protective covering. The pipe shall be left stacked and no more pipe than can be installed in one day shall be strung along the jobsite.

309.2 When a length of PVC pipe is cut, the plain end shall be beveled to the same configuration as the factory beveled end. The end shall be beveled using a pipe beveling tool, portable sander, or abrasive disc. After beveling, stop marks shall be applied to the plain end at a distance from the end corresponding to the original stop marks.

309.3 Both Bell End and Plain End of PVC pipe shall be thoroughly cleaned before connecting pipes.

309.4 Elastomeric Gaskets shall be placed into bell with colored side of the gasket to the outside.

309.5 Before connecting PVC pipes, the plain end shall be lubricated with an approved lubricant. The bell end of PVC pipe shall not be lubricated.

309.6 When connecting, the plain end pipe shall be inserted into the bell end pipe and then pushed until stop marks on plain end are flush with end of bell.

309.7 PAYMENT: Payment for this item shall be made at the unit price bid per linear foot of pipe of the type specified in the Proposal, and placed as shown on the Drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings or specials included as pipe, or for concrete blocking.

Payment for any PVC pipe designated "restrained joint" shall include cost of all components to restrain joints of pipe.

PART 310 - LOCATOR WIRE AND DETECTABLE MARKING TAPE

- 310.1 A Number 8 bare copper conductor wire for the purpose of locating PVC pipe shall be buried along the top of the pipe, and connected at each end to a fire hydrant by Cadweld Brazing just above the ground.
- 310.2 Detectable Mylar marking tape for location of PVC water pipe shall be required in areas as designated by the Engineer, more generally in commercial zones and open areas. Detectable Mylar marking tape shall be 2-inches wide, Blue in color with a continuous black lettered imprint stating "Caution: Water Line Below". Tape shall be equal to Lineguard Tape III as manufactured by Lineguard, Inc. of Wheaton, Illinois.
- 310.3 Detectable Mylar tape shall be buried above PVC water lines at a depth of 10-inches below the surface.
- 310.4 Payment for tape and wire shall be included with unit price payment for PVC pipe.

PART 311 - TAPPING OF PVC PIPE FOR SERVICE CONNECTIONS

Standard water service connections shall be made by using bronze service clamps as per standard drawings. The couplings shall be provided with factory installed brass bushings which conform to ASTM B62 and AWWA C800 for standard corporation stop threads. Bushings must match the corporation stops. Direct tapping of PVC water pipe will not be allowed.

PART 312 - FITTINGS

- 312.1 The work under this item shall include all of the requirements specified under the item of pipe, in that "pipe" is understood to also mean "bends, tees, crosses, sleeves, outlet assemblies and other specified fittings." All bends, tees, crosses, outlet assemblies, and plugs shall be restrained and blocked with concrete as shown on the Standard Details, except where the inspector may, under certain conditions, delete the blocking due to fittings having flanged, welded, or harnessed joints. Concrete blocking shall be placed so that joints are accessible for repair.
- 312.2 **PAYMENT:** Payment for this item shall be made at the unit price bid per fitting, of the type specified in the Proposal, and placed as shown on the drawings. Only fittings specifically noted in the Proposal are included in this item. No additional payment shall be made for excavation, backfilling restraining measures, or concrete blocking. Payment shall include cost of all components to restrain fittings.
- 312.3 No beveled ends shall be installed in fittings. Bevel must be removed.

PART 313 - POLYVINYL CHLORIDE (PVC) PIPE, SEWER SERVICE

- 313.1 The work under this item shall include furnishing, hauling, placing, and jointing PVC sewer pipe in the trench in specific conformity with the line and levels given. Installation shall be in accordance with ASTM D2321, Underground Installation of Flexible Thermoplastic Sewer Pipe, except as modified by these Specifications.
- 313.2 Pipe shall be protected during unloading and installation against impact shocks and free fall. After unloading and before installation, pipe shall be stored on flat level ground with no rocks or other objects under the pipe.
- 313.3 The pipe shall be laid on a firm trench bottom, true to the lines and grades shown on the drawings and/or as given in the field by the Inspector. Pipe shall be protected during handling against impact shocks and free fall. The laying of pipe in finished trenches shall be commenced at the lowest point, with the spigot ends pointing in the direction of flow. Pipe shall be laid continuously through new manholes if both inlet and outlet pipes are of the same size and in line. Upon completion of the manhole, the invert shall be shaped. The ends of adjoining pipes shall butt against each other for their entire circumference in such manner that there is no shoulder or unevenness of any kind. The pipe grade shall be shaped obtained by using batterboards and a "top line". A top line shall be maintained over a span of three grade stakes when laying pipe. As each batterboard is erected, the top and the batterboards settings. Any error, discrepancies, or displacement of grade stakes shall be called to the attention of the Inspector for correction.
- 313.4 Prior to making pipe joints, all surfaces of the portion of the pipe to be jointed shall be cleaned and dried. Jointing shall be done in strict accordance with the Manufacturer's recommended procedure.
- 313.5 At connections to manholes or other concrete structures, where the pipe is to be grouted or cast into the wall, a tight fitting rubber water stop gasket shall be installed around the pipe. The outer sealing surface of the pipe shall be planed smooth. The pipe section with the gasket shall be grouted or cast into the manhole wall. Only pipe with a smooth outer wall or concentric ribs shall be used for cast or grouted in place connections. Where A-Lock type gaskets are used, only smooth outer wall pipe shall be used.
- 313.6 Approximately 30 days after backfilling the contractor shall measure vertical ring deflection for all pipe. The deflection testing shall be performed in the presence of the Engineer or his designated representative. Maximum ring deflection of the installed pipe shall be limited to 5 percent of the base inside diameter. All pipe which exceeds the allowable deflection shall be replaced or corrected by the contractor at no additional cost. The Contractor shall perform testing and provide all mandrels and necessary equipment to perform the tests. Deflection shall be tested using a Go/No/Go Deflection Test Gauge as manufactured by Cherne Industries, Inc., or equal in accordance with the Manufacturer's instructions.

- 313.7 Any flushing of PVC sewer lines will be performed by the Contractor. Any infiltration of flushing water or other leaks into the sewer shall not be acceptable, and the contractor shall immediately correct the cause of the leak in a manner acceptable to the Engineer.
- 313.8 PVC sanitary sewer lines shall be tested for deflection and leakage. Testing shall be performed according to ODEQ Standard 252:656-5-5. Leakage testing shall be per Uni-Bell PVC Pipe Association or water test described in ODEQ 252:656-5-5.
- 313.9 PAYMENT: Payment for this item shall be made at the unit price bid per linear foot of the pipe specified in the Proposal, and placed as shown on the Drawings. Total footage shall be the actual horizontal measurement along the centerline of the pipe. No additional payment shall be made for vertical pipe or fittings used with drop manholes.

PART 314 - MANHOLE

- 314.1 The work under this item shall include all excavation, furnishing all materials required, construction, pipe connection thereto, finishing and backfilling of new standard or drop manholes. Construction of manholes shall progress as rapidly as installation of the line permits, and as directed by the Inspector. Brick manholes are not intended for new construction and shall not be allowed.
- 314.2 Excavation for manholes shall be made with vertical sides and minimum dimensions permitting construction of the manhole in accordance with the Standard Details. Manholes are to be built to an elevation not less than that of the existing ground surface, or as shown on the drawings.
- 314.3 New manholes shall be constructed around existing lines without disturbance to the line. When the manhole is completed, the existing pipe shall be removed from the invert of the manhole. Care shall be taken in removing the pipe to prevent any stoppage. Immediately upon completion of the manhole, all waste mortar and debris shall be removed from the bottom and invert. When the walls are completed, a standard manhole frame and cover shall be set in place. Above the base, manhole inverts shall be carefully constructed of solid concrete to maintain proper velocities. Changes in pipe grade, alignment or size shall be made by transition sections of the invert, determined by the lower half of the inlet and outlet pipes, but not greater than that of the outlet pipe. All inverts shall be plastered, troweled, and brushed to a smooth, clean surface. Inlet and outlet pipes shall not project beyond the interior wall of the manhole and shall be free from all sharp masonry.
- 314.4 During construction, each manhole step shall be set in place on the inside of the manhole, beginning eighteen inches above the bottom and placed not more than fifteen inches apart. No steps shall be placed closer than eighteen inches to the manhole top or farther than 27 inches from the manhole top. Steps shall be built firmly into the wall, allowing the steps to project five inches inside the manhole. The

centerline of the steps shall be as shown on the Standard Detail for Manholes. Twelve-inch steps shall be used for precast manholes.

314.5 Testing of manholes shall be done in accordance with Part 109.2 of these Specifications.

314.6 PRE-CAST MANHOLES

314.6.1 Pre-cast manholes with cast-in-place base slabs will be permitted for all standard and drop manhole installations.

314.6.2 Pre-cast manholes with integral pre-cast floors will be permitted only for standard manhole installations with depths of 12 feet or less.

314.6.3 Pre-cast manholes with integral pre-cast floors will not be permitted for drop manhole installations. Pre-cast floors shall be placed on a minimum of 18-inches of compacted Class A crushed stone.

314.6.4 Pre-cast manholes shall conform to the Specifications for Pre-Cast Reinforced Concrete Manhole Sections, ASTM C478. Joint construction shall be in accordance with the Standard Specification for Reinforced Concrete Pipe except that no exterior grout band is required. No more than eight (8) inches of concentric rings shall be used to bring the manhole to finished grade. Each concentric ring shall have a full mortar joint, not exceeding three-eighths (3/8) inch in thickness. Inside joints shall be rubbed full and struck.

314.6.5 Cost of sealed manhole rims and lids shall be included in cost of manhole.

314.7 PAYMENT: Payment for this item shall be made at the unit price bid per manhole of the type specified in the Proposal, and placed as shown on the drawings. If the manhole depth, measured from the invert to the top of the cover, exceeds six feet, the additional depth shall be paid for at the unit price bid per linear foot of manhole depth over six feet. No additional payment will be made for excavation, backfilling, pipe or concrete bottoms or interior coatings.

PART 315 - CONNECTION

315.1 The work under this item shall include all excavation, furnishing all materials required, construction, finishing, and backfilling of connections to existing mains, valves, manholes, special connections, service line re-connections, plugs, or in-line tees for future connections, as indicated on the Drawings or as directed by the Inspector.

315.2 The drawing shows details of the various connections and they shall be made in accordance with the details or as directed by the Engineer. On water mains,

Contractor shall make the pressure and wet connections to existing mains, as shown on the drawing, unless specifically noted otherwise.

- 315.3 Connections to existing manholes shall be made by cutting into the manhole at the specified grade and inserting the pipe in accordance with the Standard Details. Joint shall be water tight. Contractor shall not break into any existing sewer unless the Inspector is present and the work done shall be under the direction of the Inspector. Inlet and outlet pipes at the invert shall not project beyond the interior walls of the manholes. The manhole base shall be cut and reconstructed in such a manner that a proper invert section is maintained. All waste mortar, debris, and sharp edges shall be removed from the joints, bottom, and invert. Contractor shall remove and replace the manhole steps in the proper location and in accordance with the Standard Details if they are not properly located after the connection is made. Any and all diversion or pumping of water or sewerage in a wet connection is included in this Item.
- 315.4 Methods of construction shall be the same for house line reconnections as for main sewers. PVC shall be used in all locations, unless ductile iron pipe is specifically required by the Engineer. All reconnections shall be constructed in conformance with the Plumbing Code of the City of Bixby, unless modified herein. New pipe used shall be of the same diameter as the existing line.
- 315.5 Plugs shall be constructed of manhole brick and mortar, extending at least one foot into the line plugged from the manhole. The plug shall be watertight and troweled to a smooth finish on the interior of the manhole.
- 315.6 In-line tee fittings shall be installed for future service connections, as shown on the plans, in accordance with the Standard Detail for in-line tees. The tee shall be capped with a screw plug of cast iron, marked by a non-magnetic, mylar tape, and connected to both sides of a marker post, 8' long, 4' buried, and 4' exposed, directly above fitting plug. The mylar tape shall be minimum 2-1/2" width, green in color, marked "Caution, Sanitary Sewer Below," as manufactured by Terra Tape or Line Guard.
- 315.7 For new services, all taps under paving shall be sleeved. After new water mains have been tested and chlorinated, the Contractor shall excavate around the new main for the service transfer. The existing mains and new mains shall remain in service during the transfer of services. The Contractor shall tap the new main and install a new corporation stop, service clamp, bend, copper tubing, and required fittings. The new service shall be connected to the existing meter after the service has been tested for leakage. The excavated area shall be backfilled and restored to original condition. Where galvanized service lines are encountered, they shall be replaced with copper. Where long services are replaced, they shall be bored and sleeved under existing pavement unless approved by the Engineer. Open cutting will not be permitted unless approved by the Engineer. Copper tubing shall be Type K soft annealed conforming to ASTM B 88.

- 315.8 PAYMENT: Payment for this item shall be made at the unit price bid for each type of connection constructed, or in-line tee for future connection, as specified on the Proposal, or as directed by the Engineer. Payment for the first drop connection to a new manhole is included in the Manhole Item. No additional payment will be made for excavation, backfilling, furnishing and placing of concrete, removing and replacing of manhole steps, if necessary, or for the diversion or pumping of water or sewerage necessary to make the connection. Payment for water service transfers shall be made at the unit price bid for pipe and fittings under the appropriate connection bid item and shall include all necessary excavation, backfill, right-of-way clearing and restoring, materials, and labor.

PART 316 - LAMPHOLE

- 316.1 The work under this Item shall include all excavation, furnishing all materials required, construction, pipe connection thereto, finishing and backfilling of new lampholes. Lampholes shall be located and constructed as shown on the Drawings, or as directed by the Inspector. When the concrete lamphole frame base is completed, a standard lamphole frame is to be set in place and closed with a lamphole cover.
- 316.2 PAYMENT: Payment for this item shall be made at the unit price bid per lamphole constructed as specified on the Proposal. No additional payment will be made for excavation, backfilling, or pipe.

PART 317 - VALVE

- 317.1 The work under this item shall include furnishing, hauling, and installation of valves at the locations shown on the Drawings, and in accordance with the Standard Details. All valves shall be restrained. The American National Standard for Installation of Gray and Ductile Cast-Iron Water Mains and Appurtenances, AWWA C-600 shall govern the installation, as applicable. If the paint is damaged, the valve shall be cleaned by wire brushing and given two coats of black asphalt paint.
- 317.2 Gate valves shall be set with the stems plumb. Ball valves shall be set with the handwheels horizontal. Air relief valves shall be set so that the square operating nut on the two-inch valve can be operated from the top. Check valves shall be set horizontally. Construction standards for air relief and check valve vaults shall be the same as for manholes.
- 317.3 Fire hydrants shall be set so that the bottom of the steamer nozzle is not less than eighteen (18) inches nor more than twenty-one (21) inches above the finish grade of the ground. Breakable bolts damaged in the installation shall be replaced in kind. The oil reservoirs shall be filled before the hydrant is set. Concrete blocking shall be placed so that the drain and joints are accessible. Fire hydrant and stem extensions

shall be provided and installed as necessary, in accordance with the Manufacturer's recommendations.

- 317.4 PAYMENT: Payment for this item shall be made at the unit price bid per valve, of the type specified on the Proposal, and placed as shown on the Drawings. If fire hydrant and stem extension are required, they shall be paid for at the unit price bid for each different length of extension used. The unit price bid for air relief and check valves shall include the valve vault. No additional payment shall be made for: excavation; backfilling; restraining; concrete blocking; the pipe length between the line and the fire hydrant, except where the pipe is shown on the Drawings in a separate profile; crushed rock for drains; or air relief valve piping vaults. Payment shall include cost of restraints.

PART 318 - VALVE BOX

- 318.1 The work under this item shall include furnishing, hauling, and installation of valve boxes at the locations shown on the Drawings. The American National Standard for Installation of Gray and Ductile Cast-Iron Water Mains and Appurtenances, AWWA C-600, shall govern the installation, as applicable. Exposed parts of valve boxes shall be given one coat of red lead and one finish coat of yellow paint.
- 318.2 Valve box shall include SW Services' Debris Cap or equal.
- 318.3 PAYMENT: Payment for this item shall be made at the unit price per valve box and debris cap and placed as shown on plans. Any valve box extension shall be paid under a separate bid item. No additional payment shall be made.

PART 319 - ENCASEMENT, CONCRETE

- 319.1 The work under this item shall include the installation of concrete encasement as shown on the Drawings or as directed by the Inspector, in accordance with the Standard Details. Care shall be taken to assure that placing of encasement does not deflect the pipe from the proper grade and alignment.
- 319.2 Sanitary sewers shall be encased when the depth of cut from the original ground elevation to the flow line of the pipe is four feet (4') or less. Concrete encasement necessitated by trench widths more than the maximum as shown on the Standard Details shall be placed as directed by the Inspector.
- 319.3 PAYMENT: Payment for this item shall be made at the unit price bid per cubic yard of concrete placed as encasement. All concrete encasement required because of excessive trench width shall be placed at the expense of the Contractor. No payment will be made for concrete used as fill or in excess of the theoretical quantity computation based on the Standard Details.

PART 320 - CRADLE, CONCRETE

- 320.1 The work under this item shall include the installation of concrete cradle as shown on the Drawings or as directed by the Inspector, in accordance with the Standard Details. Care shall be taken to assure that placing of cradle does not deflect the pipe from the proper grade and alignment.
- 320.2 **PAYMENT:** Payment for this item shall be made at the unit price bid per cubic yard of concrete placed as cradle. All concrete cradle required because of excessive trench width shall be placed at the expense of the Contractor. No payment will be made for concrete used as fill or in excess of the theoretical quantity computation based on the Standard Details.

PART 321 - PIERS, REINFORCED CONCRETE

- 321.1 The work under this item shall include all materials, forming, construction and finishing of reinforced concrete piers, and necessary pipe anchorage. Piers shall be located and constructed as shown on the Drawings and Standard Details. Forms shall be made to conform to the shape of the pier and securely braced. Reinforcing steel shall be bent as detailed and securely tied in place. Bearing area for the pipe shall be made to fit the outside diameter of the pipe and shall support the pipe at the proper grade. Steel strapping and bolts shall be installed and painted with one heavy coat of coal tar or asphalt paint after bolting in place. Any honeycomb or other unevenness in the concrete shall be patched with cement mortar immediately after form removal.
- 321.2 **PAYMENT:** Payment for this item shall be made at the unit price bid per cubic yard of concrete placed as reinforced concrete piers in accordance with the Standard Details, at the location shown on the Drawings, or as directed by the Engineer. No additional payment will be made for excavation, forming, bracing, dewatering, backfilling, or pipe anchorage.

PART 322 - CONDUIT, BORED

- 322.1 The work under this item shall include the installation of railroad, street, or other crossings by boring utilizing steel conduit as shown on the Drawings. The conduit pipe shall be installed to the line and grades given. Voids between the outside of the conduit and the surrounding earth shall be filled with cement grout or other material approved by the Engineer. The space between the outside of the carrier pipe and conduit shall be filled with sand
- 322.2 **PAYMENT:** Payment for this item shall be made at the unit price bid per lineal foot of steel conduit, of the size specified in the Proposal, and placed as shown on the Drawings. All carrier pipe shall be paid for under other items. No additional

payment shall be made for excavation, backfilling, boring, tunneling, dewatering, or sand fill, bulkhead, or bore pits.

PART 323 - STRUCTURE, SPECIAL

- 323.1 The work under this item shall include the furnishing of all materials and performing all work necessary to complete any special structures shown on the Drawings.
- 323.2 **PAYMENT:** Payment for this item shall be made at the unit price bid for each structure as specified in the Proposal, and constructed as shown on the Drawings. Pipe, fittings, valves and other appurtenances will be paid for under other items. No additional payment will be made for excavation, backfill, foundations, or any particular element of construction or interior coatings.

PART 324 - MATERIALS FURNISHED BY CONTRACTOR AND INSTALLED BY CITY

- 324.1 The work under this item shall include furnishing and hauling of materials to the site of work. All necessary clearing, excavation, other site preparation, backfill and restoration, shall be performed by the contractor so that the City may install the materials in place with a minimum amount of delay. The Contractor shall furnish assistance to the City in installing the materials so that they may be readily installed. The City's responsibility shall be only for the actual installation of the materials. All other work shall be performed by the Contractor.
- 324.2 **PAYMENT:** Payment for this item shall be made at the unit price bid per material item of the type specified in the Proposal and actually installed per Drawings. Only materials specifically noted in the Proposal are included in this item. All necessary clearing, excavation, other site preparation, backfill and restoration will be paid for under other bid items.

PART 325 - SODDING AND SEEDING

- 325.1 Where the installation of water, sanitary or storm sewer mains traverse developed areas, residential or commercial, the Contractor shall restore all damaged sod turf using same type and variety. The restoration of sod turf shall be by either Sod Replacement or Hydromulch Seeding, as directed by the Engineer. Replacement sod shall match existing sod in type and variety.
- 325.2 Only that turf in one residential block may be removed at any time. Where residential blocks are not involved, only that turf in approximately 500 linear feet of trench excavation may be removed at any time. The Contractor shall restore all turf damaged by the construction. Payment for turf restoration will be per linear foot, based on the length of main installed through an area. The Contractor shall consider, when preparing his bid, the width of turf restoration required.

- 325.3 Sod Replacement: Remove the sod turf with approved cutting equipment. Store the turf in an area where construction operations will not damage it and apply sufficient water to preserve the root system. Replace the sod turf after the trench has been backfilled and compacted. As an alternate to this method, the Contractor may furnish and install new solid slab grass sod of the same type as that which was removed. The new sod shall be moist when excavated from the source and kept moist until planted. Sod shall consist of vegetative parts (rhizomes, stolons, and roots) with an appreciable quantity of adhering soil. Sod that becomes dry shall be discarded. Sodded areas shall be thoroughly watered after placement.
- 325.4 Hydromulch Seeding: Remove, store, and replace topsoil. Apply seed, fertilizer, and mulch together in homogeneously mixed slurry. Fertilizer shall be 10-20-10 and shall be applied at a rate of 10 lbs. per 1,000 sq. ft. Mulch shall be wood fiber and applied at a rate of 46 lbs. per 1,000 sq. ft. Grass seed shall be either hulled Bermuda applied at a rate of 2 lbs. per 1,000 sq. ft. or K-31 fescue applied at a rate of 8 lbs. per 1,000 sq. ft. as directed. Mulch shall be kept moist for a minimum of 10 days or until seeds have germinated and rooted. Watering shall be provided as required to maintain the grass.
- 325.5 The Contractor shall obtain a construction meter from the Connection Control Division and pay all required fees for any watering. The Contractor shall maintain all sodded or seeded areas until acceptance of the contract.
- 325.6 PAYMENT: Payment for Sod Replacement or Hydromulch Seeding will be made at the unit price bid per linear foot and shall include all necessary top soil replacement, fertilizing, watering, and maintenance. The linear foot pay quantity will be measured parallel to the pipe through the area being restored. The Contractor shall consider the width of turf restoration required for each area. No additional payment will be made for extra sodding or seeding required due to valve vaults, fire hydrants, tie-ins, service transfers, leak repairs, plugging, manholes, lampholes, or other appurtenances.

PART 326 STREET WASH DOWN

- 326.1 The Contractor shall, at the written direction of the engineer, wash down streets to control dust and clean the streets in the area of construction. Contractor shall obtain a construction meter from the Connection Control Division of the Water and Sewer Department and shall pay all required fees for obtaining and using the meter.
- 326.2 PAYMENT: Payment for street wash down shall be made at the unit price bid per linear foot of street. No payment will be made for street washing without prior written instructions from the Engineer.

PART 327 TRAFFIC CONTROL

- 327.1 The Contractor shall furnish and install traffic control devices when construction is performed upon or adjacent to any street, alley, sidewalk, residence, public ground, or other location that is subject to pedestrian or vehicular traffic. Traffic control devices shall include safety fencing, barricades, signs, barrels, warning lights, arrow panels, flagmen, high level devices, etc.
- 327.2 Traffic Control Devices shall conform to the latest edition of the Manual on Uniform Traffic Control Devices.
- 327.3 Safety fence shall be an open mesh type, high-density plastic material, 48-inches in height, and colored International Safety Orange. Fence shall be supported by fence posts spaced at no more than 10 feet.
- 327.4 A Traffic Control Plan shall be prepared by the Contractor and submitted to the Engineer for approval prior to the start of any construction operations.
- 327.5 **PAYMENT:** Payment for Traffic Control shall be by lump sum and shall be full compensation for furnishing all materials, equipment, labor and incidentals to provide adequate traffic control for the duration of the project. No additional payment will be made for Traffic Control.

PART 328 - BORE

- 328.1 Waterline installed under existing concrete or asphalt driveways shall be bored. The diameter of the bore shall be a maximum of 2-inches larger than the outside diameter of the pipe bell. The annular space between the carrier pipe and the surrounding undisturbed earth shall be filled with sand. If the carrier pipe is ductile iron it shall be polyethylene wrapped and taped at one (1) foot intervals through the entire length of the bore. If the Engineer determines that boring is not possible, the driveway shall be open cut and the pavement replaced as directed by the Engineer.
- 328.2 **PAYMENT:** Payment for crossings by boring shall be at the unit price bid per linear foot as measured from edge to edge of the driveway. All carrier pipe shall be paid for under other items. No additional payment shall be made for excavation, backfilling, boring, tunneling, dewatering or sand fill, or bore pits.

PART 329 - PAVEMENT, REMOVAL AND REPLACEMENT

- 329.1 Work under this item includes removal and replacement of concrete or asphalt for sidewalks, driveways, parking lots, curbs, streets, alleys, and the like. Pavement crossed at right angles shall be saw cut, removed, and replaced as shown on the Standard drawings or as directed by the Engineer for the type of pavement indicated

on the proposal. Pavement crossed diagonally shall be squared by saw cutting at right angles to the paved area. If a construction joint is within three (3) feet of a proposed saw line, the pavement shall be replaced to the joint as directed by the Engineer. New concrete pavement shall bridge the top of the trench by a minimum of one (1) foot on each side. All paving shall conform to ODOT and the City of Bixby Standards and Specifications. All street cuts shall be approved by the Office of the City Engineer and a Permit shall be obtained before work may begin.

329.2 All concrete pavement removal shall be a minimum of 3 feet by 3 feet. Concrete shall be High Early Strength Class P5 as per ODOT Section 701A with a minimum 28 day compressive strength of 5,000 psi, which contains the following:

Cement	705 lbs/Cu. Yd.
Flyash	0
Air	4-6%
W/C Ratio	44 lbs./lb.

329.3 Concrete shall meet the existing concrete depth with a minimum depth of 8" for streets, 6" for commercial Driveways, 5" for residential driveways, and 4" for sidewalks. Edges of cut shall be sawcut full depth. No traffic shall be allowed on the street replacement for 24 hours after placing of concrete. Twenty-four hours after placing of concrete, all butt joints must be sawed a minimum of 2", cleaned and sealed with joint sealer, ODOT Section 701A.08(e). If curb and gutter are removed, they shall be replaced to the Standards and Specifications of the typical existing curb and gutter. When one or more longitudinal construction joints are removed, the joints shall be re-established in accordance with the City of Bixby Standards for Concrete Pavement. When a pavement section is removed along an existing longitudinal construction joint, the pavement shall be dowelled to the adjacent pavement.

329.4 All asphalt shall be Type B as per ODOT Section 708. The asphalt shall be compacted to a 92% maximum density as determined by AASHTO T-209 method. Spreading and finishing of asphalt shall meet ODOT Section 411.04(g). Edges of cut shall be saw cut full depth. Prior to placement of asphalt in cut, a tack coat shall be uniformly applied. Tack coat shall be an asphalt rubber, meeting the Specifications of ASTM D1190. Optional tack coat - SS-IH meeting ODOT 708R Table 26. All surface edge joints of cut/overlay shall be sealed with an asphalt rubber meeting minimum Specifications of ASTM D1190. Asphalt rubber shall be squeegeed into edge joints. Optional edge seal - SS-IH shall meet ODOT 708R Table 2C. SS-IH emulsion shall be squeegeed into edge joint and blotted with dry concrete screenings. If curb and gutter are removed, they shall be replaced to the Standards and Specifications of the typical existing curb and gutter. Macadamized or oiled surfaces shall be replaced with asphalt.

329.5

Materials for asphalt shall meet the following ODOT, Section 708R.04:

3/4"	100
1/2"	90-100
3/8"	70-90
NO. 4	45-70
NO. 10	25-50
NO. 40	12-30
NO. 80	7-20
NO. 200	3-9

% AC SOLUBLE IN SOLVENT	4.7-
VISCOSITY GRADE ASPHALT CEMENT	AC-
DENSITY, % OF MAX. THEO. SP. GR. 1000 ADT OR MORE	95-7
LESS THAN 1000 ADT	96-8
HVEEM STABILITY MIN. 5000 ADT OR MORE	40
LESS THAN 5000 ADT	35
V.H.A., MIN. %	15
% RETAINED STRENGTH MIN. FOR 5000 ADT OR MORE	75

329.6

PAYMENT: Payment for removal and replacement of concrete or asphalt pavement shall be at the unit price bid per square yard. The pay quantity of square yards will be computed using the standard pay width for the type of pavement replaced and the length of the pavement cut along the centerline of the pipe. The pay quantity will include pavement replaced due to the proximity of a construction joint if the specified criteria is meet. For diagonal crossings, the pay quantity will include the areas replaced due to squaring. Payment for saw cut shall be at the unit price bid per linear foot. Payment for curb and gutter shall be at the unit price bid per linear foot. Payment for dowells shall be at the unit price bid per each. No payment will be made for disposal of broken pavement, temporary surfaces, excavation, preparation of subgrade, forms, or reinforcing. No payment will be made for removal or replacement of gravel. No payment will be made for the replacement of pavement damaged by the Contractor's equipment movement. No payment will be made for joint sealer, tack coats, or edge sealing.

PART 330 - EROSION CONTROL MEASURES

330.1

The contractor is responsible to insure that measures are taken to minimize erosion and sedimentation problems, including but not limited to the following:

- a) Place straw bale dikes in bar ditches at 500 ft. intervals on relatively flat grades and 200 ft. intervals on grades over 5%.
- b) Place sediment sumps upstream of straw bales. Remove sediment on a regular basis.
- c) Keep excavation and silt off of streets.
- d) In areas where water line are being constructed adjacent to improved streets, measures shall be taken which will minimize siltation and excavation accumulating in existing storm sewers. Straw bales should be placed around inlets. Precautions should be taken during heavy rains to assure that a flooding condition is not created.
- e) Straw mulch can be used as an effective means of erosion control.
- f) Erosion control measures shall be placed at the toe of slope of all cut and fill areas.

- 330.2 Straw bales shall be standard rectangular size, approximately 18" x 20" x 36", and shall be securely bound with wire. Bales shall be firmly anchored with wood or metal stakes approximately 3 feet long. A sediment sump shall be placed immediately upstream of each bale. Contractor shall clean and maintain sediment sumps throughout the maintenance period.
- 330.3 The contractor shall furnish and install straw mulch as directed. Mulch shall be applied at a rate of 1½ tons per acre. Mulch shall be securely anchored in place.
- 330.4 Payment for Erosion Control Measures will be by lump sum and shall be full compensation for furnishing all materials, equipment, labor, and incidentals to provide all required Erosion Control And Storm Water Pollution Prevention Measures as stipulated by the Oklahoma Department of Environmental Quality Regulations.

PART 331 - WATER TABLE CRADLE

- 331.1 The work under this item shall include furnishing and installing Water Table Cradle as shown on the drawings or as directed by the Engineer and in accordance with the Standard Details.
- 331.2 The trench excavation shall be completely dewatered to provide a dry and stable trench bottom. The trench shall be excavated to a minimum of 18" below the bottom of the pipe. If additional base stabilization is required crushed stone, 3 1/2" to 1 1/2" (Gradation No. 1), shall be installed on the trench bottom, prior to the installation of water table cradle. Minimum trench widths for flexible pipe installations shall be as shown in the standard detail.

- 331.3 Geotextile filter fabric shall be installed on the trench bottom and walls. Crushed stone shall be installed in the trench directly on the filter fabric to a height of 12 inches above the top of the pipe. The crushed stone bedding material shall be carefully worked and compacted around the pipe. The filter fabric shall be placed over the top of the crushed stone with a minimum 18" lap. All fabric joints shall be lapped a minimum of 18". Water Table Cradle shall be installed for the full excavated width of the trench.
- 331.4 Crushed stone for Water Table Cradle shall be Gradation No. 57, 1" to No. 4. The Geotextile Filter Fabric shall be a nonwoven, needlepunch constructed fabric composed of petrochemical based polymers that are chemically and biologically inert. The fabric unit weight shall be not less than 13 ounces per square yard with a Mullen Burst Strength (ASTM D-3786) of not less than 600 psi.
- 331.5 **PAYMENT**
- Payment for Water Table Cradle will be made at the unit price bid per linear foot for the specified diameter of pipe. The unit price shall include the cost of all labor, equipment, and materials required. No additional payment will be made for dewatering or crushed stone required for additional base stabilization.

PART 332 - CONDUIT, OPEN CUT

- 332.1 The work under this item shall include the installation of railroad, street, or other crossings by open cut utilizing conduit as shown on the Drawings. The conduit pipe shall be installed to the line and grades given, and shall be installed in accordance with standard bedding detail for semi-rigid pipe.
- 332.2 The conduit shall be installed with spacers, sand fill, and bulkheads per the standard details.
- 332.3 **PAYMENT:** Payment for this item shall be made at the unit price bid per lineal foot of conduit, of the size specified in the Proposal, and placed as shown on the Drawings. All carrier pipe shall be paid for under other items. No additional payment shall be made for excavation, backfill, or bulkhead.

DIVISION IV

WATER METER BACKFLOW PREVENTER SPECIFICATIONS

APPROVED METER AND BACKFLOW PREVENTER MANUFACTURERS

<i>Size</i>	<i>Type</i>	<i>Manufacturer</i>	<i>Application</i>
5/8" x 3/4"	Displacement	Neptune	All – Provided by City
3/4"	Displacement	Neptune	All – Provided by City
1"	Displacement	Neptune	All – Provided by City
1-1/2"	Displacement	Neptune Invensys	All
2" & 3"	Compound	Neptune Invensys	All All (May be used for irrigation or for domestic and irrigations where properly sized.)
2" & 3"	Turbine	Neptune Invensys	Irrigation
4", 6", & 8"	Compound	Neptune Invensys	Domestic water, combo domestic/irrigation/limited area fire sprinkler.
4", 6", 8", & 10"	Fire Flow	Neptune Invensys	Combo domestic/fire protection (and irrigation).
4", 6", 8", & 10"	Fire Service Turbine	Neptune Invensys	Combo domestic/fire protection (and irrigation) where particularly approved by Connection Control.
4", 6", 8", & 10"	Turbine	Neptune Invensys	Domestic/irrigation where particularly approved by Connections Control.

<i>Size</i>	<i>Backflow Preventers</i>	<i>Manufacturers</i>	<i>Requirements</i>
ALL SIZES	DOUBLE CHECK ASSEMBLY	AMES, CONBRACO, FEBCO, HERSEY, WATTS, WILKINS	USE ONLY APPROVED WATER Meter In Assembly
ALL SIZES	DOUBLE CHECK DETECTOR	AMES, CONBRACO, FEBCO, HERSEY, WATTS, WILKINS	USE ONLY APPROVED WATER Meter In Assembly
ALL SIZES	REDUCER PRESSURE	AMES, CONBRACO, FEBCO, HERSEY, WATTS, WILKINS	USE ONLY APPROVED WATER Meter In Assembly
ALL SIZES	REDUCER PRESSURE DETECTOR	AMES, CONBRACO, FEBCO, HERSEY, WATTS, WILKINS	USE ONLY APPROVED WATER Meter In Assembly

PART 401 - DEFINITIONS

- 401.1 Absolute True Encoder Register – A meter register designed either to electronically determine the position of the odometer wheels or otherwise electronically capture the register reading. The register must be designed to reliably provide an accurate reading, or an error signal in the event of a malfunction, with no manual adjustment when it is connected to an interrogation device. The register must be capable of internally storing or sensing the reading so that it can be accurately read with a remote interrogator without relying on an external device to count periodic signals.
- 401.2 Meter Register Assembly – The system component that converts a meter reading into an electronic signal. This component consists of a meter register and true encoder assembly, assembled as either a single unit or as separate units, to be mounted on the meter.
- 401.3 Signal Transmission Assembly – System component consisting of electronic wires (or cable) and connectors, which transmit the electronic signal from a meter-register assembly to a remote receptacle.
- 401.4 Remote Pit Receptacle – The system component at a remote location from the meter, which receives the probe or a portable visual-display unit or a portable data-acquisition unit.
- 401.5 Probe – The system component that connects a remote receptacle with a portable data-acquisition unit or portable visual-display unit.

- 401.6 Portable data-acquisition unit (PDAU) - The system component that semi-automatically obtains and records on electronic data-storage unit, the significant meter registration and the customer identification number when its probe is connected to a remote receptacle.
- 401.7 Portable visual-display unit (PVDU) – The system component that provides a visual display of the significant meter registration when its probe is connected to a remote receptacle.
- 401.8 Automatic Meter Reading (AMR) Device – A device that when connected to an absolute true encoder register will interrogate the register either automatically or on demand and transmit the reading via radio signal to a hand held, drive by or fixed base receiver.

PART 402 - DISPLACEMENT WATER METERS – 5/8" x 3/4", 3/4", 1", & 1-1/2"

402.1 WATER DISPLACEMENT METERS

402.2 GENERAL

- 402.2.1 Displacement water meters shall conform to current Standard Specifications of the AWWA C700, latest edition, "Cold Water Meters – Displacement Type."
- 402.2.2 All meters and components shall be manufactured in the territorial boundaries of the United States.
- 402.2.3 The overall length of the 1-1/2" meters shall be 13". Overall length of 5/8"x3/4" and 3/4" meters shall be 7 -1/2" in length. Overall length of 1" meters shall be 10- 3/4" in length.
- 402.2.4 The meter size and pressure shall conform to Table 1, "Characteristics of Displacement Type Meters", of AWWA C700.
- 402.2.5 All meters must be guaranteed to operate under a working pressure of 150 psi without leakage or damage to any part.

402.3 CASE

- 402.3.1 The main case of the meter shall be cast waterworks bronze, with a cast iron bottom to allow breakage in the event of freezing so as not to distort the main housing. The "frost proof" cast iron bottom shall be attached to the bronze housing by four (300 Series) stainless steel bolts or cast bronze bolts and the internal water separated from the cast iron bottom by means of suitable polymer or rubber liner.

402.3.2 The serial number of the meter shall be imprinted permanently on the raised portion of the main case over the outlet spud or on the raised portion of the main case over the outlet flange. Non-encoder registers of 1-½” and smaller meters shall have covers.

402.3.3 Castings shall not be repaired in any manner.

402.4 MEASURING CHAMBER

402.4.1 The measuring chamber shall be cast bronze or suitable synthetic polymer and be guaranteed to measure accurately for 15 years. Nutating disc or oscillating piston type will be acceptable. Disc or piston shall be made of the highest grade vulcanized hard rubber or synthetic polymer and fitted accurately into the measuring chamber. Discs shall be equipped with a thrust bearing. The disc shall be flat and one-piece construction. The number of disc nutations shall comply with the AWWA C700 latest edition.

402.4.2 Measuring chambers shall be field repairable/replaceable without recalibration using change gears.

402.5 REGISTER

402.5.1 Registers will be magnetic driven straight reading in U.S. gallons and hermetically sealed with heat-treated glass on non-encoder registers. Encoder registers may be hermetically sealed with clear plastic.

402.5.2 All gearing shall be enclosed in the sealed register unit. All 1-½” meters shall have identical change gears.

402.5.3 The sealed register unit shall be warranted for 25 years to be free from defects and fogging.

402.5.4 The registration indicated on the meter dial shall not be less than 98.5% nor more than 101.5% while being tested within normal test flow limits as specified in Table 1 “Characteristics of Displacement Type Meters”, of AWWA C700. Meters shall register not less than 95% and not more than 101% at the minimum test rate flow as specified in Table 1 “Characteristics of Displacement Type Meters” of AWWA C700.

402.6 SCREEN

A rigid screen of non-corrosive material shall be installed inside the meter case. The screen shall fit snugly, shall be easily removable, and shall have an effective straining area at least double that of the main case outlet.

402.7 LOCAL REMOTE READOUT

402.7.1 Each meter shall be capable of accepting an absolute true encoder register operable with no outside electrical power.

- 402.7.2 Manufacturers must demonstrate that they have at least 5 consecutive years of successful experience in the manufacture and sale of a reliable absolute true encoder register.
- 402.7.3 Remote pit receptacles shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.
- 402.7.4 When available from an approved Meter Manufacturer, remote pit receptacles or AMR devices shall read in 1,000-gallon increments.

402.8 WARRANTY AND CERTIFICATES OF TESTING

The company guarantees that all meters will perform to AWWA new meter accuracy standards for a period of one (1) year from date of installation and to meet AWWA repaired meter standards for 10 years, and the meter register shall be guaranteed for 25 years to perform accurately and free from fogging. The Manufacturer shall replace at his own expense all meters rejected for failure to comply with this standard. Each meter shall be furnished with certificates of testing indicating conformance with AWWA meter accuracy for new meters.

402.9 CONNECTIONS

- 402.9.1 The connections for 1-1/2" meter shall be bronze, flanged, oval type, faced and drilled, conforming to Class 125, ANSI B16.24.
- 402.9.2 5/8"x 3/4", 3/4", and 1" meters shall have threaded connections.

402.10 EXCHANGE PROGRAM

- 402.10.1 Each bidder will indicate the unit price for the new meters including an allowance per unit for an equal number of meters from the City of Bixby for a trade-in. Successful bidders shall furnish shipping crates and shall pick up trade-in meters.
- 402.10.2 Each bidder shall furnish a bid for testing up to 25% of the trade-in meters.

402.11 REPAIR PARTS

Successful bidders shall furnish a complete repair parts list and price list for each type meter including prices for future register exchange and chamber exchange. Price shall be net prices of parts Free on Board (FOB) destination for the duration of the contract.

402.12 METER LITERATURE AND HEAD LOSS DELIVERY CURVES

Each bidder shall include with his proposal, two complete copies of descriptive material, loss of head and delivery curves for each item for which a bid is placed. No bids shall be considered unless the above information is furnished with bids.

402.13 COMPANION FLANGES (OPTIONAL)

Where specified, the meters shall be furnished with waterworks bronze companion flanges, gaskets, bolts, and nuts.

402.14 CONFLICTS

Where conflicts arise, the City interpretation shall prevail.

PART 403 - COMPOUND TYPE WATER METERS – 2”, 3”, 4”, 6”, & 8”

403.1 COMPOUND WATER METERS

403.2 GENERAL

403.2.1 Where 2” through 8” compound water meters are specified or required, they shall conform to AWWA C702, “Cold Water Meters – Compound Type”, Latest Edition. Meters shall be designed to operate at a minimum working pressure of 150 psig without leakage or damage to any part.

403.2.2 The compound meter shall contain two measuring chambers, one for low flow and one for high flow, with flow through the chambers controlled by a swing, lifting action, or spring-loaded valve.

403.3 SIZE, CAPACITY, AND DIMENSIONS

The compound meter size and pressure shall conform to Table 1, “Operating Characteristics”, of AWWA C702. The overall dimensions from flange to flange of the meter shall not exceed those shown in Table 2, “Meter Dimensions”, of AWWA C702.

403.4 CASE

403.4.1 All meters shall have an outer case with separate, removable measuring chambers. Castings shall not be repaired in any manner. The case shall be bronze.

403.4.2 The size, model, and flow direction shall be cast on the outer case.

403.4.3 All interior parts shall be removable for repair without disturbing the pipeline connections.

403.4.4 The serial number of the meter shall be imprinted permanently on the top of the outlet flange.

403.5 FLANGED CONNECTIONS

- 403.5.1 All 2" compound meters shall be bronze flanged, oval type, faced and drilled, conforming to Class 125, ANSI B16.24.
- 403.5.2 The 3" through 6" compound meters shall be bronze flanged, round type, faced and drilled, conforming to Class 125, ANSI B16.24.

403.6 REGISTER

- 403.6.1 Registers shall be magnetically driven, hermetically sealed, and straight reading in U.S. gallons with heat-treated glass on non-encoder registers. Encoder registers may be hermetically sealed with plastic. The register(s) furnished shall be the same register(s) that was on the meter when it was tested for accuracy.
- 403.6.2 Register capacity and indication shall meet the requirements of Table 5 "Maximum Indication on Test Circle and Minimum Register Capacity" of the AWWA C702. A large center sweep test hand register shall be provided.
- 403.6.3 The accuracy of the meter shall not be less than 97% nor more than 103% of the water actually passed through the meter at any rate of flow specified in Table 1, "Operating Characteristics" of the AWWA C702. The test water shall be at a temperature less than 80 degrees F. The accuracy at changeover flow, due to operation of the automatic valve mechanism, shall not be less than 90% and not more than 103%, and shall meet the requirements of Table 3 "Changeover Flow Rates" of AWWA C702.
- 403.6.4 Copper or stainless steel seal wires with lead seal shall be furnished and installed by Manufacturer (supplier) to seal the register.

403.7 MEASURING CHAMBER, TURBINE BEARINGS

- 403.7.1 The measuring chamber shall be bronze or synthetic polymer, and shall be easily removable from the main case.
- 403.7.2 The turbine bearings or bushings shall be made of vulcanized, hard rubber, or synthetic polymer material, and shall be replaceable.
- 403.7.3 The high flow metering mechanism shall be driven by a rotor or propeller mounted on a horizontal shaft. No vertical shaft mounted rotor or torrent wheel measuring chambers shall be allowed.

403.8 MAGNETIC OR DIRECT COUPLINGS

Magnetic or direct drive register couplings with stuffing boxes may be used when the intermediate gear trains are located in the water compartment. Only magnetic register couplings shall be used when the intermediate gear trains are located in the register compartments.

403.9 STRAINER

403.9.1 The strainer shall be flanged, and shall have an effective straining area at least double the meter case inlet area. The body shall be ductile or cast iron or bronze, and the strainer screen shall be bronze or stainless steel. The strainer shall be designed for a minimum working pressure of 150 psig.

403.9.2 The total laying length of the meter and strainer shall be as follows:

Meter and Strainer	
<i>Meter Size, Inches</i>	<i>Max. Laying Length, Inches</i>
2	24
3	24
4	33
6	33

403.10 LOCAL REMOTE READOUT

403.10.1 2-inch meters shall be capable of accepting an absolute true encoder register operable with no outside electrical power.

403.10.2 3-inch and larger meters shall be furnished with an absolute true encoder register operable with no outside electrical power.

403.10.3 Manufacturers must demonstrate that they have at least 5 consecutive years of successful experience in the manufacture and sale of a reliable absolute true encoder register.

403.10.4 Remote pit receptacles shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.

403.10.5 When available from an approved Meter Manufacturer, remote pit receptacles or AMR devices shall read in 1,000-gallon increments.

403.11 AFFIDAVIT OF COMPLIANCE

An Affidavit of Compliance and Certificate of Testing shall be furnished to the City of Bixby with each meter to insure that the meter conforms to these Specifications.

403.12 COMPANION FLANGES (OPTIONAL)

Where specified, the meter shall be furnished with waterworks bronze companion flanges, gaskets, bolts, and nuts.

403.13 REPAIR PARTS

Successful bidders shall furnish a complete repair parts list and price list for each type meter including prices for future register exchange and chamber exchange. Price shall be net prices of parts FOB destination for the duration of the contract.

403.14 WARRANTY

The Manufacturer guarantees that all meters will perform to AWWA new meter accuracy standards for a period of one (1) year from date of installation. The Manufacturer shall replace at its own expense all meters rejected for failure to comply with this standard. Each meter shall be furnished with certificate of testing indicating conformance with AWWA meter accuracy for new meters.

403.15 EXCHANGE PROGRAM

403.15.1 Each bidder shall indicate the unit price for the new meters. Successful bidders shall furnish shipping crates and shall pick up trade-in meters.

403.15.2 Each bidder shall furnish a bid for testing up to 25% of the trade-in meters.

403.16 METER LITERATURE AND HEAD LOSS DELIVERY CURVES

Each bidder shall include with his proposal, two complete copies of descriptive material, loss of head, and delivery curves for each item for which a bid is placed. No bids shall be considered unless the above information is furnished with bids.

403.17 CONFLICTS

Where conflicts arise, the City interpretation shall prevail.

PART 404 - TURBINE WATER METERS – IRRIGATION AND SPECIAL SERVICES – 2” & 3”

404.1 TURBINE WATER METERS

404.2 GENERAL

Where 2” and 3” turbine meters are specified or required, they shall conform to AWWA C701, “Cold Water Meters, Turbine Type, for Customer Service”, Latest Edition. They shall be designed to operate at a minimum working pressure of 150 psig without leakage or damage to any part.

404.3 SIZE CAPACITY AND DIMENSIONS

The meter size, nominal capacity ratings, and pressure loss shall conform to Table 1, "Operating Characteristics", of AWWA C701. The overall dimensions from flange to flange of the meter shall not exceed those shown in Table 2, "Meter Dimensions for Class 1 and Class II Turbine-Type Meters", of the AWWA C701.

404.4 CASE

- 404.4.1 All meters shall have a bronze outer case with a separate, removable measuring chamber, in which the turbine operates. Castings shall not be repaired in any manner.
- 404.4.2 All interior parts shall be removable for repair without disturbing the pipeline connections.
- 404.4.3 The size, model, and flow direction shall be cast on the outer case.
- 404.4.4 The serial number of the meter shall be imprinted permanently on the top of the outlet flange.
- 404.4.5 An adjustment vane for positive and negative calibration of meter accuracy shall be incorporated into the meter main case or measuring chamber cover.

404.5 FLANGED CONNECTIONS

- 404.5.1 All 3" turbine meters shall be bronze flanged, round type, faced and drilled, conforming to Class 125, ANSI B16.24.
- 404.5.2 All 2" turbine meters shall be bronze flanged, oval type, faced and drilled, conforming to Class 125, ANSI B16.24.

404.6 REGISTER

- 404.6.1 The register shall be magnetically driven, hermetically sealed, and straight reading in U.S. gallons with heat-treated glass on non-encoder registers. Encoder registers may be hermetically sealed with plastic. The register(s) furnished shall be the same register(s) that was on the meter when it was tested for accuracy.
- 404.6.2 The register capacity and indication shall meet the requirements of Table 4 "Maximum Indication on Initial Dial and Maximum Register Capacity" of AWWA C701. A large center sweep test hand register shall be provided.
- 404.6.3 The accuracy of the meter shall not be less than 98% nor more than 102% of the water actually passed through the meter at any rate of flow specified in Table 1 "Operating Characteristics" of the AWWA C701. The test water shall be at a temperature less than 80°F.

404.6.4 Register cover shall be made of bronze with the name of the Manufacturer cast on the lid in raised letters. The serial number shall be imprinted permanently on the cover. Register cover not required for encoder registers.

404.6.5 Copper or stainless steel seal wires with lead seal shall be furnished and installed by Manufacturer (supplier) to secure the register.

404.7 MEASURING CHAMBER, TURBINE BEARING

404.7.1 The measuring chamber shall be bronze or synthetic polymer, and shall be easily removable from the main case.

404.7.2 The turbine bearings or bushings shall be made of vulcanized, hard rubber, synthetic polymer, or ceramic material, and shall be replaceable.

404.8 STRAINER

404.8.1 The strainer shall be flanged and shall have effective straining area at least double the meter case inlet area. The body shall be ductile or cast iron or bronze, and the strainer screen shall be bronze or stainless steel. The strainer shall be designed to operate at a minimum working pressure of 150 psi.

404.8.2 The total laying length of the meter and strainer shall be as follows:

Meter and Strainer	
<i>Meter Size, Inches</i>	<i>Max. Laying Length, Inches</i>
2	20
3	19

404.9 LOCAL REMOTE READOUT

404.9.1 Each 2" meter shall be capable of accepting an absolute true encoder register operable with no outside electrical power.

404.9.2 Each 3" meter shall have an absolute true encoder register operable with no outside electrical power.

404.9.3 Manufacturers must demonstrate that they have at least 5 consecutive years of successful experience in the manufacture and sale of a reliable absolute true encoder register.

404.9.4 Remote pit receptacles and AMR devices shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.

404.9.5 When available from an approved Meter Manufacturer, remote receptacles or AMR devices shall read in 1,000-gallon increments.

404.10 AFFIDAVIT OF COMPLIANCE

An Affidavit of Compliance and Certificate of Testing shall be furnished to the City of Bixby with each meter to insure that the meter conforms to these Specifications.

404.11 COMPANION FLANGES (OPTIONAL)

Where specified, the meter shall be furnished with waterworks bronze companion flanges, gaskets, bolts, and nuts.

404.12 REPAIR PARTS

Successful bidders shall furnish a complete repair parts list and price list for each type meter including prices for future register exchange and chamber exchange. Price shall be net price of parts FOB destination for the duration of the contract.

404.13 WARRANTY

The company guarantees that all meters will perform to AWWA new meter accuracy standards for a period of one (1) year from date of installation. The Manufacturer shall replace at its own expense all meters rejected for failure to comply with this standard. Each meter shall be furnished with certificates of testing indicating conformance with AWWA meter accuracy for new meters.

404.14 METER LITERATURE AND HEAD LOSS DELIVERY CURVES

Each bidder shall include with his proposal, two complete copies of descriptive material, loss of head and delivery curves for each item for which a bid is placed. No bids shall be considered unless the above information is furnished with bids.

404.15 CONFLICTS

Where conflicts arise, the City interpretation shall prevail.

PART 405 - TURBINE METERS – FIRE SERVICE – 4”, 6”, 8”, & 10”

405.1 FIRE SERVICE TURBINE METERS

405.2 GENERAL

405.2.1 Where fire service meters are specified or required, they shall conform to AWWA C703, “Cold Water Meters, Fire Service Type”, Latest Edition. They shall be designed to operate at a minimum working pressure of 150 psig without leakage or damage to any part.

405.2.2 The meter shall be a high velocity turbine type with strainer and shall conform to the National Fire Protection Association (NFPA) requirements, and shall be approved by the Underwriters Laboratory (UL) for fire service.

405.3 SIZE, CAPACITY, AND DIMENSIONS

The meter size and nominal capacity ratings and pressure loss shall conform to Table 1 "Operating Characteristics" of AWWA C703. The overall dimensions from flange to flange of the meter shall not exceed those shown in Table 2 "Meter Dimensions" of AWWA C703.

405.4 CASE

405.4.1 All meters shall have an outer case with a separate, removable measuring chamber, in which the turbine operates. Castings shall not be repaired in any manner. The case shall be bronze or cast iron.

405.4.2 The size, model, and flow direction shall be cast on the outer case.

405.4.3 All interior parts shall be removable for repair without disturbing the pipeline connections.

405.4.4 The serial number of the meter shall be imprinted permanently on the top of the outlet flange.

405.5 FLANGED CONNECTIONS

The fire service turbine meter shall be bronze flanged, round type, faced and drilled, conforming to Class 125, ANSI B16.24.

405.6 REGISTER

405.6.1 The registers shall be magnetically driven, hermetically sealed and straight reading the U.S. gallons. The register furnished shall be the same register that was on the meter when it was tested for accuracy.

405.6.2 The register capacity and indication shall meet the requirements of Table 4 "Register Characteristics" of the AWWA C703. A large center sweep test hand register shall be provided, if available.

405.6.3 The accuracy of the meter shall not be less than 98% nor more than 102% of the water actually passed through the meter at any rate of flow specified in Table 1 "Operating Characteristics" of AWWA C703. The test water shall be at a temperature less than 80°F.

405.6.4 Register cover shall be made of bronze with the name of the Manufacturer cast on the lid in raised letters. The serial number shall be imprinted permanently on the cover. Register covers not required on encoder equipped registers.

405.6.5 Copper or stainless steel seal wires with lead seal shall be furnished and installed by Manufacturer (supplier) to seal the register.

405.7 MEASURING CHAMBER, TURBINE BEARING

405.7.1 The measuring chamber shall be bronze or synthetic polymer, and shall be easily removable from the main case.

405.7.2 The turbine bearings or bushings shall be made of vulcanized, hard rubber, synthetic polymer, or ceramic material, and shall be replaceable.

405.7.3 An adjustment vane for positive and negative calibration of meter accuracy shall be incorporated into the meter main case or measuring chamber cover.

405.8 STRAINER

405.8.1 The strainer shall be flanged and shall have effective straining area at least quadruple the meter case inlet area. The body shall be ductile or cast iron or bronze, and the strainer screen shall be bronze or stainless steel. The strainer shall be designed to operate at a minimum working pressure of 150 psi.

405.8.2 The total laying length of the meter and strainer shall be as follows:

Meter and Strainer	
<i>Meter Size, Inches</i>	<i>Max. Laying Length, Inches</i>
4	35 ¹ / ₁₆ "
6	44 ⁷ / ₈ "
8	51 ⁵ / ₁₆ "
10	59 ³ / ₄ " to 61 ³ / ₄ "

405.9 LOCAL REMOTE READOUT

405.9.1 Each meter shall be furnished with an absolute true encoder register operable with no outside electrical power.

405.9.2 Manufacturers must demonstrate that they have at least 5 consecutive years of successful experience in the manufacture and sale of a reliable absolute true encoder register.

405.9.3 Remote pit receptacles and AMR devices shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.

405.9.4 When available from an approved Meter Manufacturer, remote pit receptacles or AMR devices shall read in 1,000-gallon increments.

405.10 AFFIDAVIT OF COMPLIANCE

An Affidavit of Compliance and Certificate of Testing shall be furnished to the City of Bixby with each meter to insure that the meter conforms to these Specifications.

405.11 COMPANION FLANGES (OPTIONAL)

Where specified, the meter shall be furnished with waterworks bronze companion flanges, gaskets, bolts, and nuts.

405.12 REPAIR PARTS

Successful bidders shall furnish a complete repair parts list and price list for each type meter including prices for future register exchange and chamber exchange. Price shall be net price of parts FOB destination for the duration of the contract.

405.13 WARRANTY

The company guarantees that all meters will perform to AWWA new meter accuracy standards for a period of one (1) year from date of installation. The Manufacturer shall replace at its own expense all meters rejected for failure to comply with this standard. Each meter shall be furnished with certificates of testing indicating conformance with AWWA meter accuracy for new meters.

405.14 METER LITERATURE AND HEAD LOSS DELIVERY CURVES

Each bidder shall include with his proposal, two complete copies of descriptive material, loss of head and delivery curves for each item for which a bid is placed. No bids shall be considered unless the above information is furnished with bids.

405.15 CONFLICTS

Where conflicts arise, the City interpretation shall prevail.

PART 406 - FIRE FLOW METERS – 4”, 6”, 8”, & 10”

406.1 FIRE FLOW METERS

406.2 GENERAL

406.2.1 Fire flow meters shall have a compound meter bypass, or they shall be a Neptune Protectus II Turbine meter with a displacement meter bypass, or an Invensys Fireline Turbine meter with a displacement meter bypass. The high flow metering mechanism for compound bypass meters shall be driven by a rotor or propeller mounted on a horizontal shaft. No vertical shaft mounted rotor or torrent wheel

measuring chambers shall be allowed. The meter shall conform to AWWA C703 "Cold Water Meters, Fire Service Type"; AWWA C702, "Cold Water Meters Compound Type"; or AWWA C701, "Cold Water Meters, Turbine Type."

406.2.2 Meters shall be designed to operate at a minimum working pressure of 150 psig without leakage or damage to any part.

406.2.3 The meter shall conform to the National Fire Protection Association (NFPA) requirements, and shall be approved by the Underwriters Laboratory (UL) for fire service.

406.3 SIZE, CAPACITY, AND DIMENSIONS

The meter size, nominal capacity ratings and pressure loss shall conform to Table 1 "Operating Characteristics" of AWWA C702.

406.4 CASE

406.4.1 The main line meter and automatic valve case shall be made of galvanized cast iron or bronze. The bypass type of meter shall have a bronze case.

406.4.2 The flow direction shall be cast on the outer case.

406.4.3 All interior parts shall be removable for repair without disturbing the pipeline connections.

406.5 FLANGED CONNECTIONS

The meter flanges shall be integral with the case, round type, faced and drilled, and conform to Class 125, ANSI B16.1.

406.6 REGISTERS

406.6.1 Registers shall be magnetically driven, straight reading, hermetically sealed, and shall read in U.S. gallons. The register furnished shall be the same register that was on the meter when it was tested for accuracy.

406.6.2 The register capacity and indication shall meet the requirements of Table 1 "Operating Characteristics" of the AWWA C703.

406.6.3 The accuracy of the meter shall not be less than 97% or more than 103% of the water actually passed through the meter at any rate of flow specified in Table 1 "Operating Characteristics" of the AWWA C703. The test water shall be at a temperature less than 80°F.

406.6.4 Register cover shall be made of bronze with the name of the Manufacturer cast on the lid in raised letters. The serial number shall be imprinted permanently on the cover. Register cover not required on encoder-equipped registers.

406.6.5 Copper or stainless steel wires with lead seal shall be furnished and installed by Manufacturer (supplier) to seal the register.

406.7 MEASURING CHAMBER, TURBINE BEARINGS

406.7.1 The measuring chamber shall be bronze or synthetic polymer, and shall be easily removable from the main case.

406.7.2 The turbine bearings or bushings shall be made of vulcanized, hard rubber, synthetic polymer, or ceramic material, and shall be replaceable.

406.7.3 100% of the flow through the meter must pass through the metering chambers. No proportional metering chambers shall be allowed.

406.8 STRAINER

The strainer shall be flanged and shall have effective straining area at least quadruple the meter case inlet area. The body shall be ductile or cast iron or bronze, and the strainer screen shall be bronze or stainless steel. The strainer shall be designed to operate at a minimum working pressure of 150 psi.

406.9 LOCAL REMOTE READOUT

406.9.1 Each meter shall be furnished with an absolute true encoder register operable with no outside electrical power.

406.9.2 Manufacturers must demonstrate that they have at least 5 consecutive years of successful experience in the manufacture and sale of a reliable absolute true encoder register.

406.9.3 Remote pit receptacles and AMR devices shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.

406.9.4 When available from an approved Meter Manufacturer, remote pit receptacles or AMR devices shall read in 1,000-gallon increments.

406.10 AFFIDAVIT OF COMPLIANCE

An Affidavit of Compliance and Certificate of Testing shall be furnished to the City of Bixby with each meter to insure that the meter conforms to these Specifications.

406.11 COMPANION FLANGES (OPTIONAL)

Where specified, the meter shall be furnished with waterworks bronze companion flanges, gaskets, bolts, and nuts.

406.12 REPAIR PARTS

Successful bidders shall furnish a complete repair parts list and price list for each type meter including prices for future register exchange and chamber exchange. Price shall be net price of parts FOB destination for the duration of the contract.

406.13 WARRANTY

The company guarantees that all meters will perform to AWWA new meter accuracy standards for a period of one (1) year from date of installation. The Manufacturer shall replace at its own expense all meters rejected for failure to comply with this standard. Each meter shall be furnished with certificates of testing indicating conformance with AWWA meter accuracy for new meters.

406.14 METER LITERATURE AND HEAD LOSS DELIVERY CURVES

Each bidder shall include with his proposal, two complete copies of descriptive material, loss of head and delivery curves for each item for which a bid is placed. No bids shall be considered unless the above information is furnished with bids.

406.15 CONFLICTS

Where conflicts arise, the City interpretation shall prevail.

PART 407 - DOUBLE CHECK DETECTOR ASSEMBLY – 4”, 6”, 8”, & 10”

407.1 DOUBLE CHECK DETECTOR ASSEMBLY

407.2 GENERAL

- 407.2.1 where specified or required for fire service lines, a double check detector assembly backflow preventor shall be installed in accordance with the City of Bixby plumbing code.
- 407.2.2 The assembly shall consist of a double check valve, resilient seated gate valves, and a parallel bypass meter assembly. Design working pressure shall be a minimum of 150 psi.
- 407.2.3 The assembly shall be tested by a City of Bixby, approved Back Flow Assembly Tester before it will be accepted.
- 407.2.4 The check valves in the main line and bypass shall remain closed until there is a demand for water. Flow rates up to approximately three (3) gallons per minute shall be directed through the metered bypass. Higher flow rates shall open the mainline check valves causing flow to occur through the mainline and the bypass.

407.3 REFERENCE STANDARDS AND APPROVALS

407.3.1 The double check detector assembly shall meet or exceed the following standards:

407.3.2 Manual of Cross-Connection Control, Foundation for Cross-Connection Control and Hydraulic Research, University of Southern California (USC-FCCC & HR).

407.3.3 American Society of Sanitary Engineering (ASSE Standard Number 1048).

407.3.4 American Water Works Association (AWWA) Standard Number C510, Double Check Valve Backflow Prevention Assembly (mainline assembly only).

407.3.5 The double check detector assembly shall be tested and approved as follows:

1) USC-FCCC & HR Approved

2) Factory Mutual (FM) Approved

3) Underwriters Laboratories (UL) Classified

407.4 MAIN LINE DOUBLE CHECK ASSEMBLY

407.4.1 The main line unit shall consist of two independently acting spring loaded check valves, located between two resilient seated gate valves, and four properly placed resilient seated test cocks.

407.4.2 The main line body and cover shall be constructed of cast iron, ductile iron, or stainless steel. All iron bodies and parts shall be coated with a polymerized coating conforming to AWWA C550.

407.4.3 All internal metal parts of the check valves shall be bronze or stainless steel. Check valves shall be serviceable in-line.

407.4.4 The shutoff valves shall be resilient seated gate valves conforming to AWWA C509, outside screw and yoke (OS&Y). Main line end connections shall be flanged, 125 lb. ANSI B16.1.

407.5 BYPASS METER ASSEMBLY

407.5.1 The bypass assembly shall consist of two independently acting spring loaded check valves, two shutoff valves, displacement water meter, and four properly placed resilient seated test cocks.

407.5.2 The bypass assembly piping and valve bodies shall be constructed of bronze. All internal metal parts shall be bronze or stainless steel.

- 407.5.3 The bypass meter shall be a City of Bixby approved displacement meter furnished with an absolute true encoder register operable with no outside electrical power. The meter shall be furnished with a certificate of testing indicating conformance with AWWA meter accuracy for new meters.
- 407.5.4 Remote pit receptacles and AMR devices shall automatically query the encoder register to obtain a numeric reading. Manufacturers shall demonstrate that a reading obtained from a remote pit receptacle or AMR device will match the reading on the encoder register.
- 407.5.5 When available from an approved Meter Manufacturer, remote interrogators or AMR devices shall read in 1,000-gallon increments.

407.6 AFFIDAVIT OF COMPLIANCE

An affidavit of Compliance and Certificate of Testing shall be furnished to the City of Bixby with each double check detector assembly to insure that it conforms to these Specifications.

407.7 SHIPPING

- 407.7.1 Each double check detector assembly shall be fully assembled, placed on pallets, and crated for shipping.
- 407.7.2 Meters shall be FOB destination.

DIVISION V
ADOPTION OF ODOT
“Standard Specifications for Highway Construction”
1999 Edition

Roadway and Drainage Construction Projects in the City of Bixby shall be governed by the 1999 Edition of the Oklahoma Department of Transportation (ODOT) “Standard Specifications for Highway Construction”.

1. All water distribution systems shall be constructed in accordance with the current City of Bixby Public Works Department Standards and Specifications.
2. All water distribution system construction shall be inspected by the Public Works Department Utility Inspectors, in accordance with City Policy.
3. The City Public Works Department shall operate all valves. All valves shall be located outside of street paving and shall have a 2' diameter x 4" formed concrete collar installed around valve boxes.
4. The Contractor shall verify utility locations before excavating.
5. Ductile iron pipe shall be C150 for lines 6-inch through 18- inch diameter and C151 for lines under 6-inch diameter.
6. All utility lines located under streets shall be laid in Type A Aggregate base. The trench shall be entirely backfilled with limestone screenings, Type A Aggregate Base, or flowable fill to the top of paving subgrade and compacted to 95% standard proctor density.
7. PVC pipe shall conform to AWWA C900 Pressure Class 200, equivalent to DR-14 unless otherwise shown.
8. When C900 PVC is used, a No. 8 bare copper wire shall be taped on the top surface of the pipe and connected to each fire hydrant by coldweld braising or attaching to a bolt, just above ground level.
9. All iron pipe shall be polywrapped. All fittings and valves shall be polywrapped ductile or cast iron.
10. All fittings, valves, and joints shall be restrained using Mega Lugs or other approved mechanical restraint system or product.
11. All distribution lines in conduit and at drainage feature crossings shall be constructed with restrained joints.
12. All main lines shall have a minimum of three (3) feet and a maximum of eight (8) feet of cover.
13. All water distribution system lines, except dead end for fire hydrants only, shall be looped to provide circulation.
14. Distribution lines smaller than six (6) inches shall not be installed.
15. Bedding, backfill, and compaction over water lines shall be in accordance with City Standard Drawings. Backfill and compaction requirement for streets shall extend two (2) feet back of curb.
16. Water main construction shall include the coordination of fire hydrant bases, valve boxes with final grades, paving and landscape.
17. Fire Hydrants:
 - 17.1 Fire hydrants shall be *Meuller Centurian* or *AVK*.
 - 17.2 Fire hydrants should have a 4-½ inch pumper outlet, not less than 2-1/2 inch hose outlets and be connected to the main with pipe not smaller than six inches. The pumper should be able to connect to the hydrant with a single 10 feet length of suction hose, set so the center of the lowest outlet is not less than 18-inches above the surrounding grade. The hydrant operating nut should not be over four feet above grade, and shall have a four-foot six-inch length.
18. Taps on existing water lines shall be constructed as follows: (1) Stainless steel saddles are required; (2) The tapping valve shall be supported beneath to preclude the weight of the tapping valve from bearing on the pipe and saddle; (3) After installation of saddle and valve and prior to the tap, the saddle and valve shall be pressure tested for a minimum of 1 minute at 100 psi in the presence of a City Inspector; (3) The pipe coupon from the tap shall be retained by the Contractor and submitted to the City.
19. The City shall be notified 48 hours prior to testing and disinfection. Escrow payments to the City for meter settings are the responsibility of the Contractor.
20. Flushing, testing and disinfection shall be performed by the Contractor, at his expense, under the supervision of the City.
21. When working in or adjacent to existing subdivisions only one (1) days worth of trench may be open at a given time. This requirement may be modified, in writing, by the Public Works Director for a specific project.
22. Road closures must be coordinated a minimum of forty-eight (48) hours in advance. Roads will not be closed for over eight (8) hours without written permission from the Public Works Director.
23. Service lines shall be tapped to main lines using manufacturer approved saddles for specific pipe material utilized.
24. Service lines shall be DR 9 3408 PE or seamless copper water tube meeting the requirements of ASTM-B88.
25. All service line fittings shall be brass with packed joint compression, soldered, or threaded connections.
26. Long service lines shall be plugged and magnetic tape identifying waterline shall be planted at each end of conduit.
27. When conduit is provided for service lines it shall be scheduled 40 PVC or stronger.



**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO.: STANDARD_DRAWINGS
DRAWING NAME: 00_STDWATERNOTES

**STANDARD CONST. NOTES
WATER LINE**

WO




**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
01_W_BEDDINGDETAIL

**BEDDING DETAIL
WATER LINE**

W1

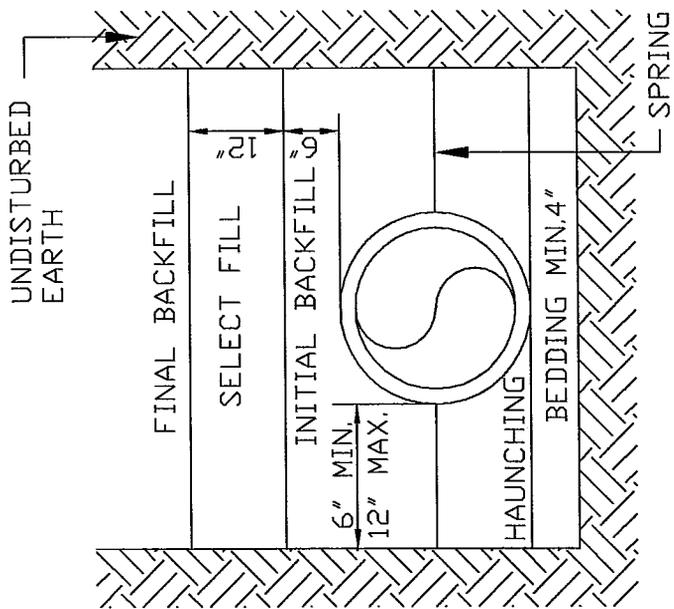


NON-PAVED AREAS		PAVED AREAS	
P V C	DUCTILE IRON	DUCTILE IRON	CONCRETE
EXCAVATED MATERIAL	EXCAVATED MATERIAL	CRUSHED ROCK	CRUSHED ROCK
SELECT FILL	SELECT FILL	CRUSHED ROCK	CRUSHED ROCK
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
CLEAN SOIL NO ROCK LARGER THAN 3/8"			

NON-PAVED AREAS		PAVED AREAS	
P V C	DUCTILE IRON	DUCTILE IRON	CONCRETE
EXCAVATED MATERIAL	EXCAVATED MATERIAL	CRUSHED ROCK	CRUSHED ROCK
SELECT FILL	SELECT FILL	CRUSHED ROCK	CRUSHED ROCK
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
SELECT FILL	SELECT FILL	3/8" CHIPS	3/8" CHIPS
CLEAN SOIL NO ROCK LARGER THAN 3/8"			


NOTES:

1. SELECT FILL CONSISTS OF EXCAVATED MATERIALS CONTAINING NO ROCKS LARGER THAN 2 INCHES.
2. CRUSHED ROCK SHALL BE ODOT TYPE A BASE
3. BEDDING REQUIRED ONLY FOR ROCK EXCAVATION.
4. COMPACTION REQUIREMENTS:
 - a. NON-PAVED AREAS: 90% MAXIMUM STANDARD PROCTOR DENSITY FOR COHESIONLESS SOILS AND 85% FOR COHESIVE SOILS.
 - b. PAVED AREAS: 95% MAXIMUM STANDARD PROCTOR DENSITY FOR COHESIONLESS SOILS.
5. FILLS OVER 10 FEET DEEP - MATERIAL IN THE AREA FROM SELECT FILL TO BEDDING SHALL BE 3/4" CRUSHER RUN WELL GRADED.
6. FLOWABLE FILL MAY BE SUBSTITUTED FOR ALL MATERIALS IN ROAD CROSSING.
7. PAVED AREA INCLUDES 2' BEHIND CURB.


— SPRING LINE OF PIPE

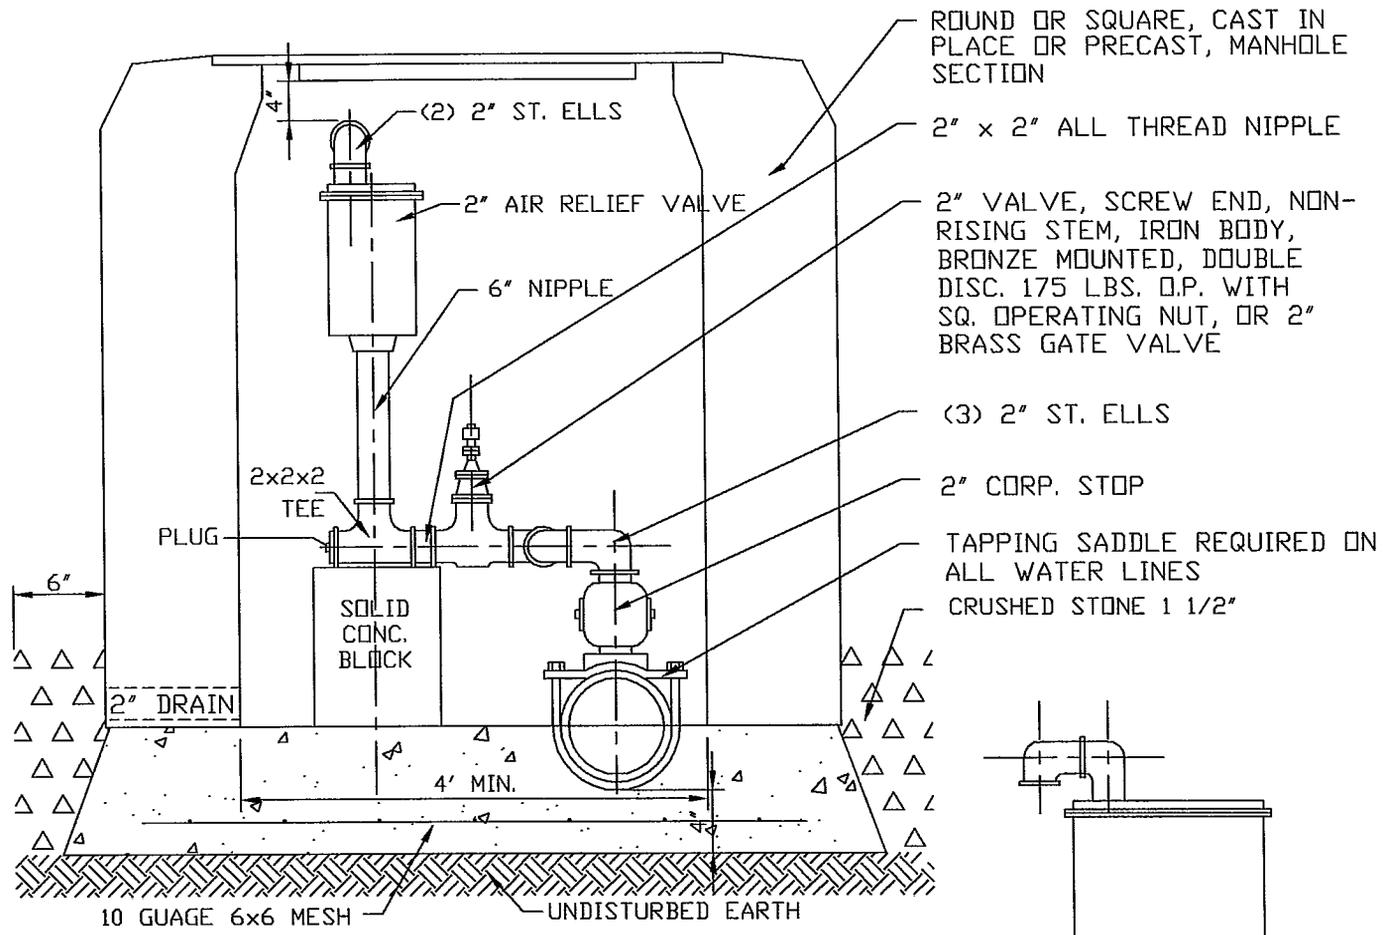

- ROUND OR SQUARE, CAST IN PLACE OR PRECAST, MANHOLE SECTION
- 2" x 2" ALL THREAD NIPPLE
- 2" VALVE, SCREW END, NON-RISING STEM, IRON BODY, BRONZE MOUNTED, DOUBLE DISC. 175 LBS. O.P. WITH SQ. OPERATING NUT, OR 2" BRASS GATE VALVE
- (3) 2" ST. ELLS
- 2" CORP. STOP
- TAPPING SADDLE REQUIRED ON ALL WATER LINES
- CRUSHED STONE 1 1/2"

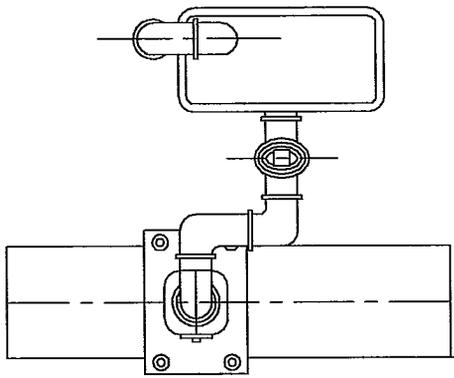

TOP VIEW

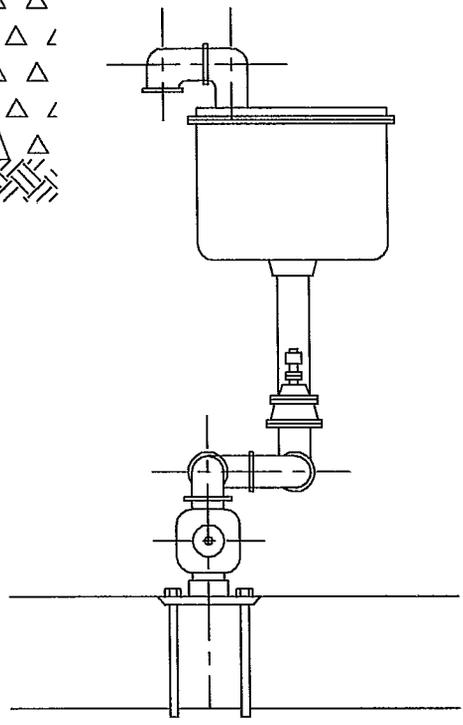

SIDE VIEW

- NOTES:
1. ALL PIPING AND CONNECTORS SHALL BE BRONZE.
 2. FRAME AND LID FOR VAULT SHALL BE AS SHOWN ON STANDARD DRAWING W 03.





CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
 STANDARD DRAWINGS

DRAWING NAME:
 02_ARVDETAIL

AIR RELIEF VALVE AND VAULT
WATER LINE

W2

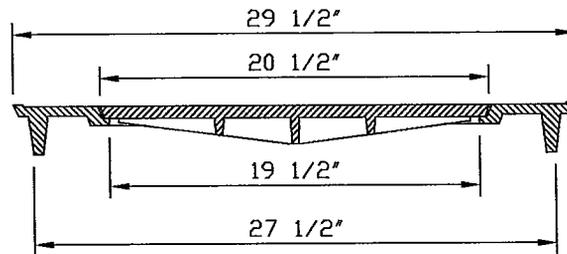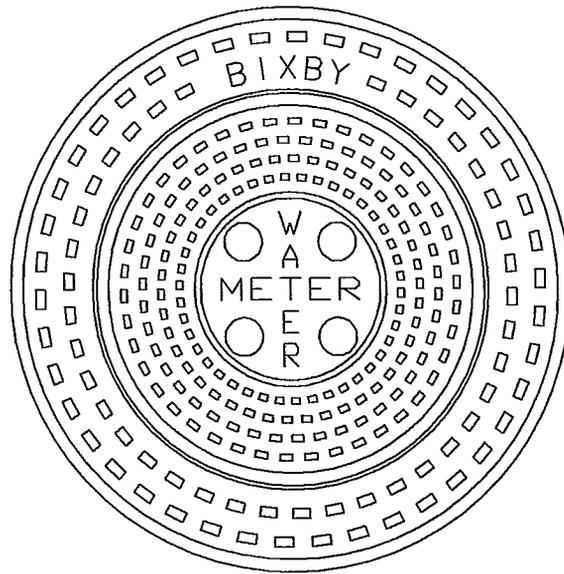

1. METER RING IS CAST WITH SIX BOLT/RIVIT HOLES THROUGH THE SKIRT FOR ATTACHMENT TO 28" DIAMETER CORRUGATED STEEL METER CAN. SPECIFY CAN HEIGHT WHEN ORDERING.
2. METER LID TO HAVE KEYED LOCKING MECHANISM.

	WEIGHT
LID	46 LBS
RING	61 LBS
SET	107 LBS






CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT



VALVE VAULT
WATER LINE

W3

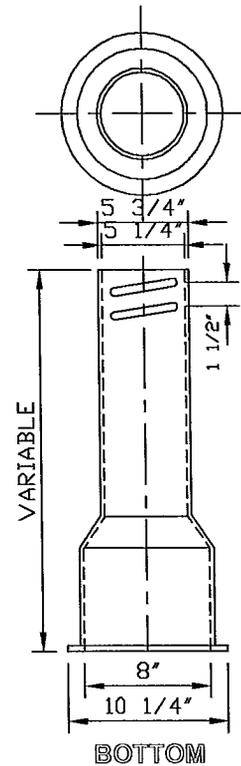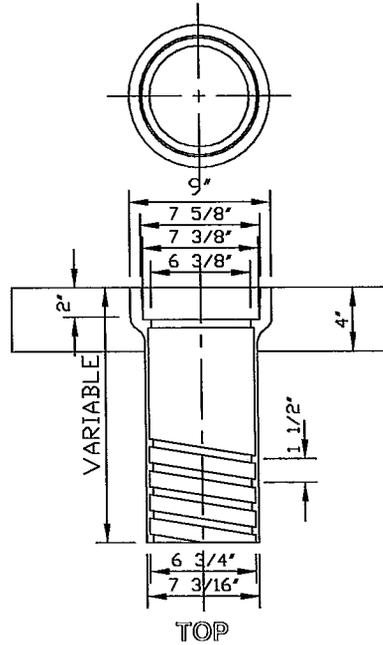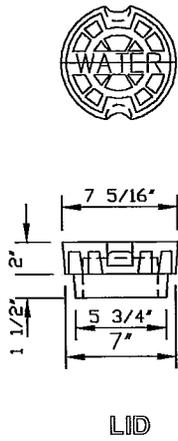

4" - 12" VALVE BOX DETAIL

REQUIRED WEIGHTS	
LID	15 LBS
TOP (16")	30 LBS
BOTTOM (24")	35 LBS

NOTES:

1. WATER LINE CONTRACTOR TO PLACE 2 FOOT SQUARE CONCRETE PAD AROUND EACH WATER VALVE AFTER FINAL GRADING HAS BEEN COMPLETED AND TRENCHES HAVE SETTLED.
2. VALVE BOXES REQUIRING OVER 2 ADDITIONAL BOTTOM SECTIONS SHALL BE EXTENDED USING C900 DR14 PVC PIPE WITH A BOTTOM AND TOP SECTION PLACED ON TOP OF THE C900 DR14 PVC PIPE.



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT




PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
04_VALVEBOXDETAIL

VALVE BOX DETAIL
WATER LINE





W4

MIN. REQUIRED WEIGHT

LID	120 LBS
RING	180 LBS

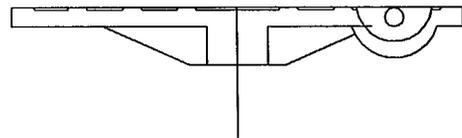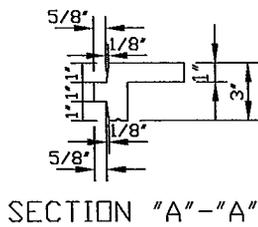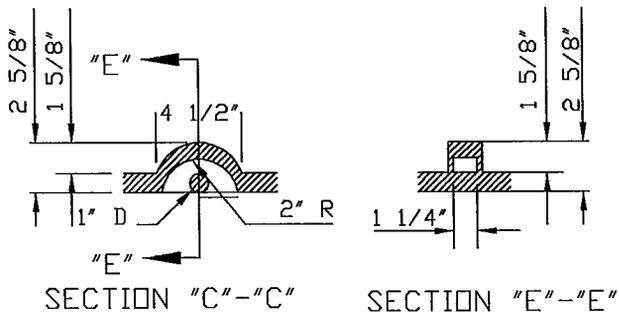

LIFTING EYE
SEE DETAIL
BELOW

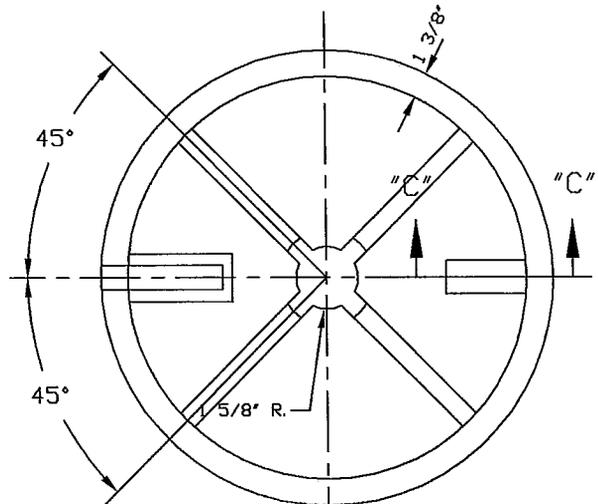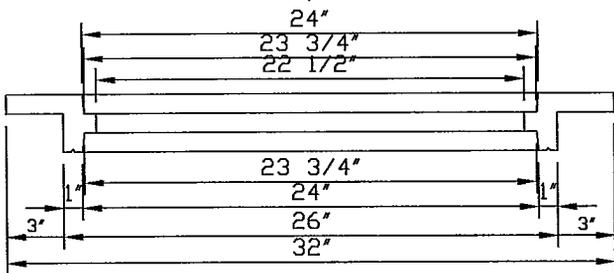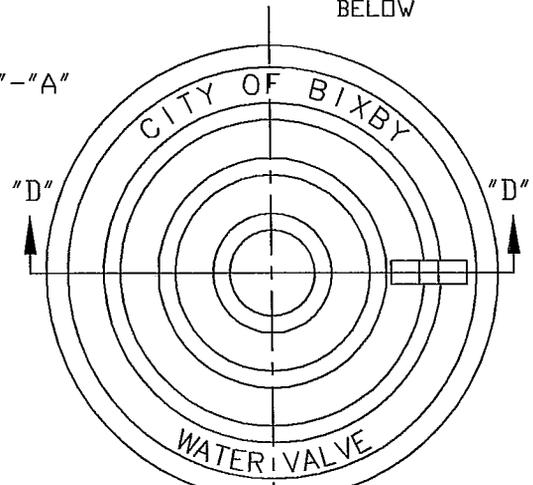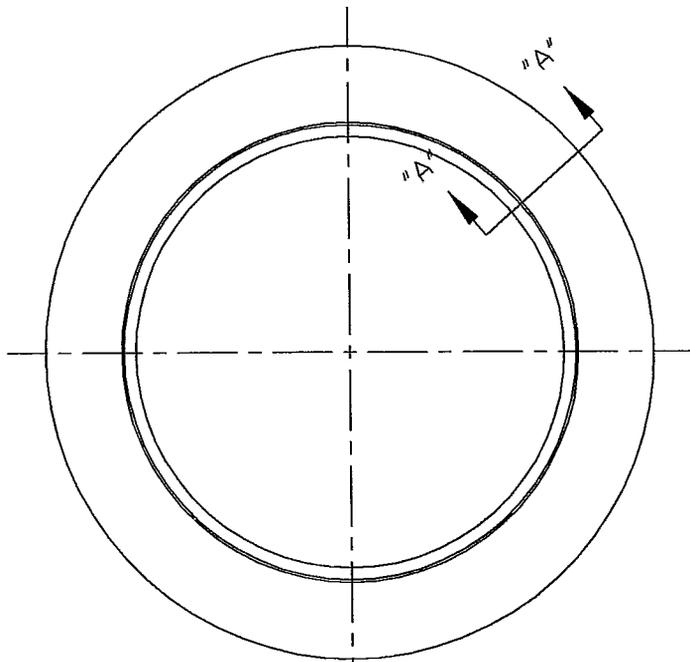

VALVE VAULT FRAME

VALVE VAULT LID











CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD_DRAWINGS

DRAWING NAME:
05_VVFRAME&LID

VALVE VAULT FRAME & LID
WATER LINE

W5

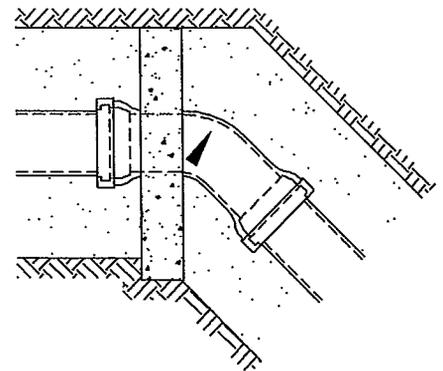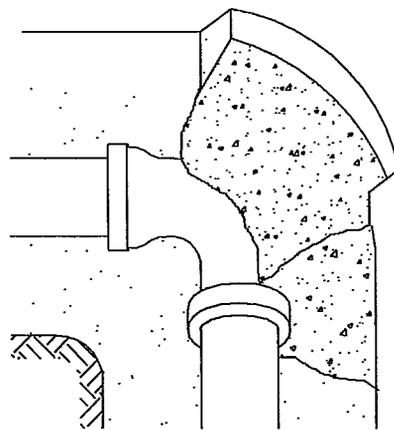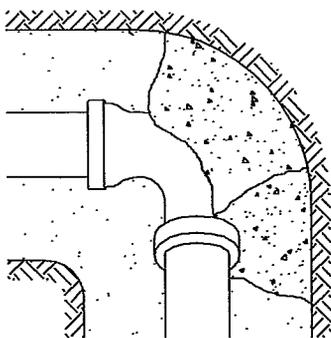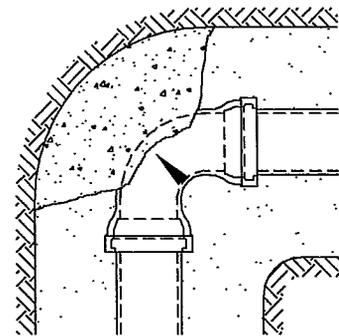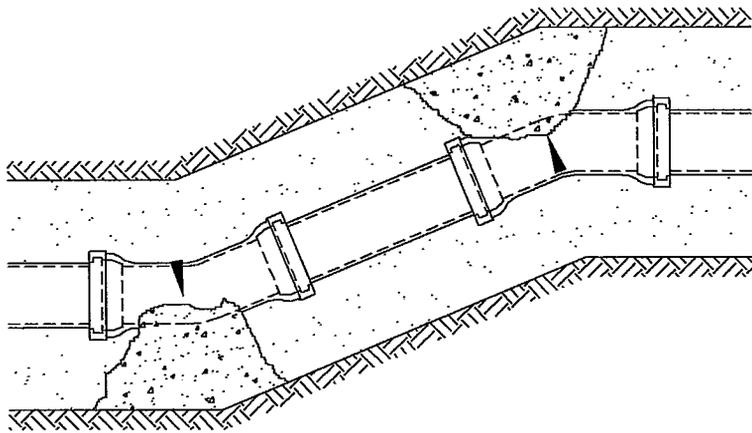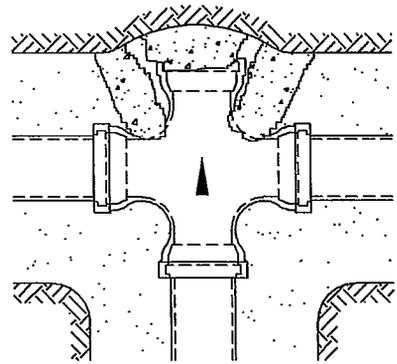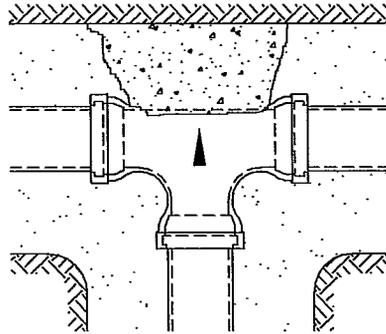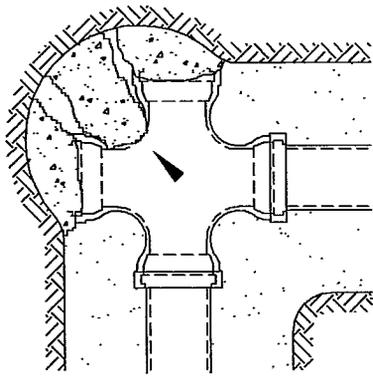

2" - 8" PIPE

LARGER




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD_DRAWINGS

DRAWING NAME:
06_THRUSTBLOCK


THRUST BLOCK DETAILS
WATER LINE

W6

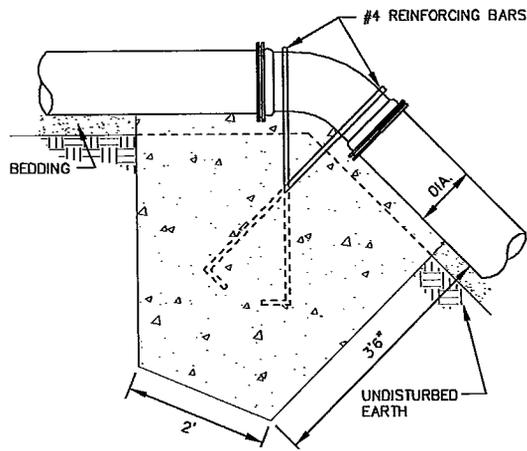


SECTION FOR
VERTICAL BENDS
(14" OR SMALLER)

45°, 22 1/2°, 11 1/4° BENDS

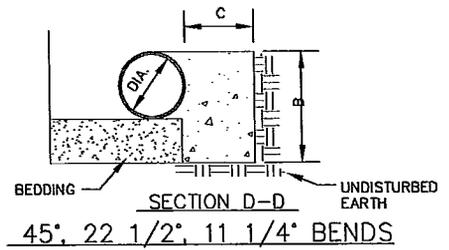


SECTION D-D

45°, 22 1/2°, 11 1/4° BENDS

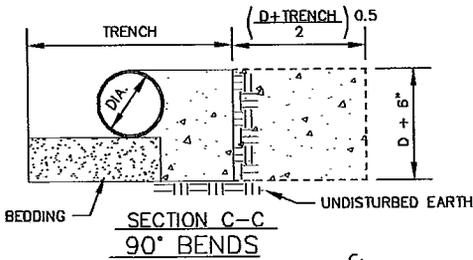


SECTION C-C
90° BENDS

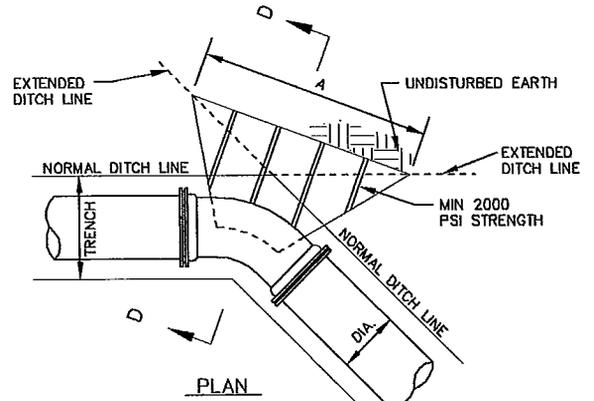


PLAN


45°, 22 1/2°, 11 1/4° BENDS

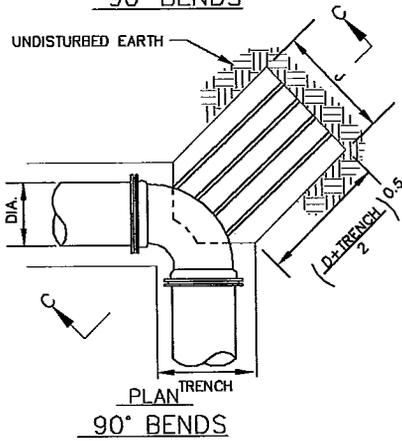


PLAN
90° BENDS

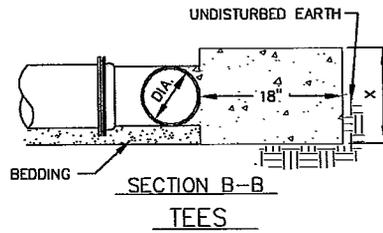


SECTION B-B
TEES

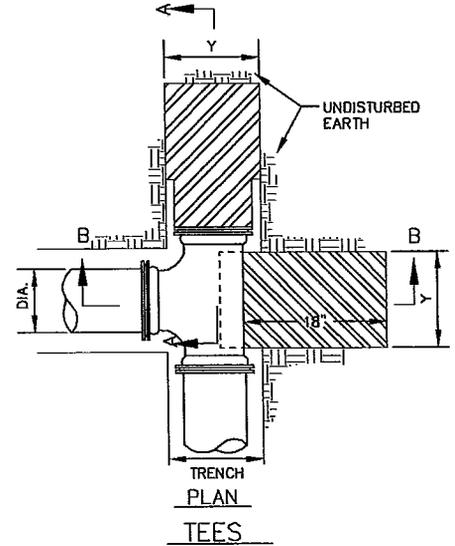


TRENCH
PLAN
TEES

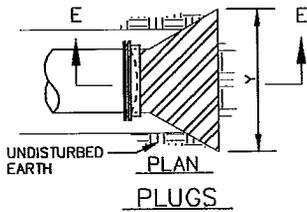

PLAN
PLUGS

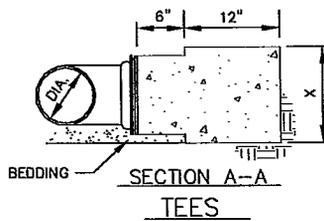

SECTION A-A
TEES

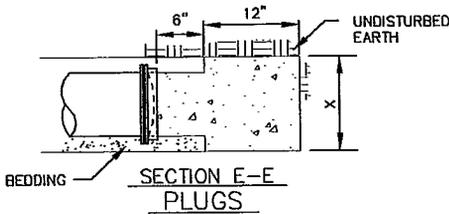

SECTION E-E
PLUGS

DIMENSIONS FOR CONCRETE ANCHORAGES													
PIPE DIA.	TRENCH WIDTH	45° BEND			22 1/2° BEND			11 1/4° BEND			TEE OR PLUG		90° BEND
		A	B	C	A	B	C	A	B	C	X	X	J
36	60	7'-0"	3'-0"	2'-6"	6'-0"	3'-0"	2'-6"	6'-0"	3'-0"	2'-6"	4'-0"	3'-4"	6'-5"
30	54	5'-6"	2'-6"	2'-0"	4'-6"	2'-6"	2'-0"	4'-6"	2'-6"	2'-0"	3'-6"	3'-0"	5'-8"
24	44	3'-9"	2'-6"	1'-10"	2'-6"	2'-6"	1'-1"	2'-0"	2'-6"	1'-0"	3'-3"	3'-0"	4'-9"
20	39	2'-9"	2'-2"	1'-8"	2'-0"	2'-2"	1'-1"	2'-0"	2'-2"	0'-11"	3'-0"	2'-0"	4'-1"
18	37	2'-3"	2'-0"	1'-6"	2'-0"	2'-0"	1'-1"	2'-0"	2'-0"	0'-11"	2'-3"	2'-0"	3'-9"
16	35	2'-0"	1'-10"	1'-5"	2'-0"	1'-10"	1'-1"	2'-0"	1'-10"	0'-11"	1'-6"	2'-0"	3'-6"
12	30	2'-0"	1'-6"	1'-4"	2'-0"	1'-6"	1'-0"	2'-0"	1'-6"	0'-11"	1'-0"	2'-0"	3'-0"
10	28	2'-0"	1'-4"	1'-4"	2'-0"	1'-4"	1'-0"	1'-10"	1'-4"	0'-11"	1'-0"	1'-8"	2'-8"
8	26	2'-0"	1'-2"	1'-4"	1'-10"	1'-2"	1'-0"	1'-8"	1'-2"	0'-11"	0'-10"	1'-6"	2'-4"
6	24	2'-0"	1'-1"	1'-4"	1'-8"	1'-1"	1'-0"	1'-6"	1'-0"	0'-11"	0'-8"	1'-4"	2'-1"




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
07_W_THRUSTANCHOR


THRUST BLOCK ANCHORAGES
WATER LINE

W7

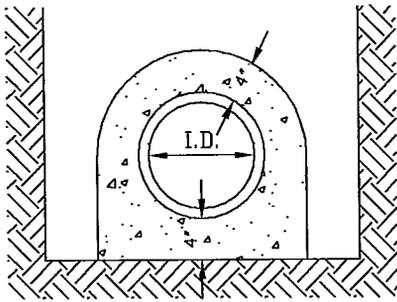


CONCRETE ENCASEMENT
CONCRETE PER LF

8" I.D.	DIP, RCP	1.41 CF
10" I.D.	DIP, RCP	1.67 CF
12" I.D.	DIP, RCP	1.93 CF
15" I.D.	DIP, RCP	2.36 CF
18" I.D.	DIP, RCP	2.81 CF
21" I.D.	DIP, RCP	3.27 CF
24" I.D.	DIP, RCP	3.76 CF
27" I.D.	DIP, RCP	4.26 CF
30" I.D.	DIP	4.78 CF
30" I.D.	RCP	5.09 CF
36" I.D.	DIP, RCP	5.80 CF
36" I.D.	RCP	6.20 CF

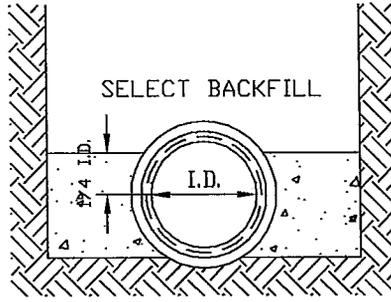

CONCRETE CRADLE
CONCRETE PER LF

8" I.D.	DIP, RCP	1.09 CF
10" I.D.	DIP, RCP	1.23 CF
12" I.D.	DIP, RCP	1.33 CF
15" I.D.	DIP, RCP	1.66 CF
18" I.D.	DIP, RCP	2.00 CF
21" I.D.	DIP, RCP	1.96 CF
24" I.D.	DIP, RCP	2.69 CF
27" I.D.	DIP, RCP	3.52 CF
30" I.D.	DIP	3.38 CF
30" I.D.	RCP	4.40 CF
36" I.D.	DIP, RCP	4.12 CF
36" I.D.	RCP	5.26 CF

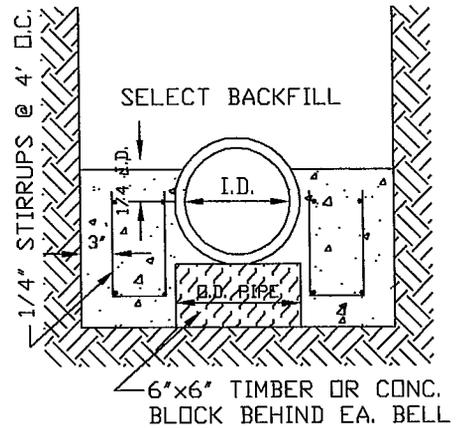


WATER TABLE CRADLE
CONCRETE PER LF

8" I.D.	DIP, RCP	2.34 CF
10" I.D.	DIP, RCP	2.48 CF
12" I.D.	DIP, RCP	2.58 CF
15" I.D.	DIP, RCP	3.04 CF
18" I.D.	DIP, RCP	3.50 CF
21" I.D.	DIP, RCP	3.46 CF
24" I.D.	DIP, RCP	4.44 CF
27" I.D.	DIP, RCP	5.52 CF
30" I.D.	DIP	5.38 CF
30" I.D.	RCP	6.65 CF
36" I.D.	DIP, RCP	6.37 CF
36" I.D.	RCP	7.76 CF


CONCRETE ENCASEMENT & CRADLES

NOTES:

1. ALL FINISHED SUB-GRADES SHALL BE PREPARED ACCURATELY BY MEANS OF HAND TOOLS.
2. TRENCH WIDTHS ARE DETAILED IN SPECIFICATION 311 EXCAVATION.

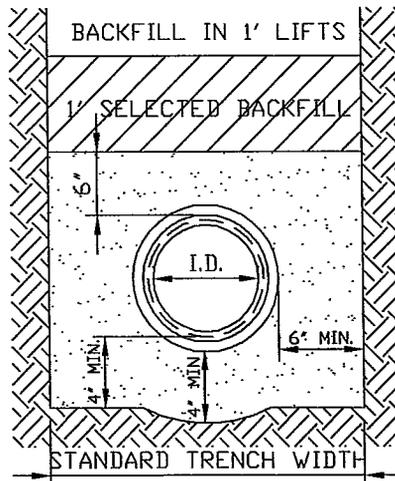

CROSS SECTION

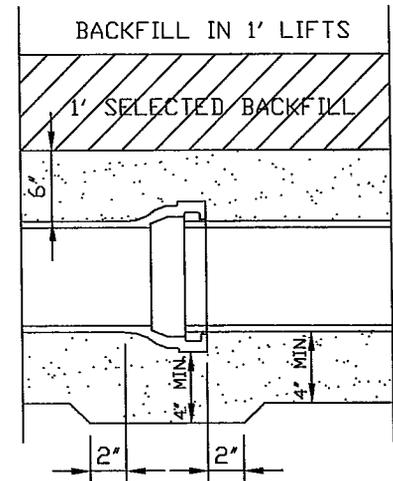

LONGITUDINAL SECTION



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT



TRENCH CONDITIONS
WATER LINE


W8

MARKER POST TEMP.
UNTIL LOCATION CAN BE
PAINTED ON CURB

IRON PIN @
LOT CORNER

CRUSHED ROCK
BACKFILL COMPACTED TO
95% STD. DENSITY

CRUSHED ROCK
TO EXTEND AT LEAST
2' BEHIND CURB

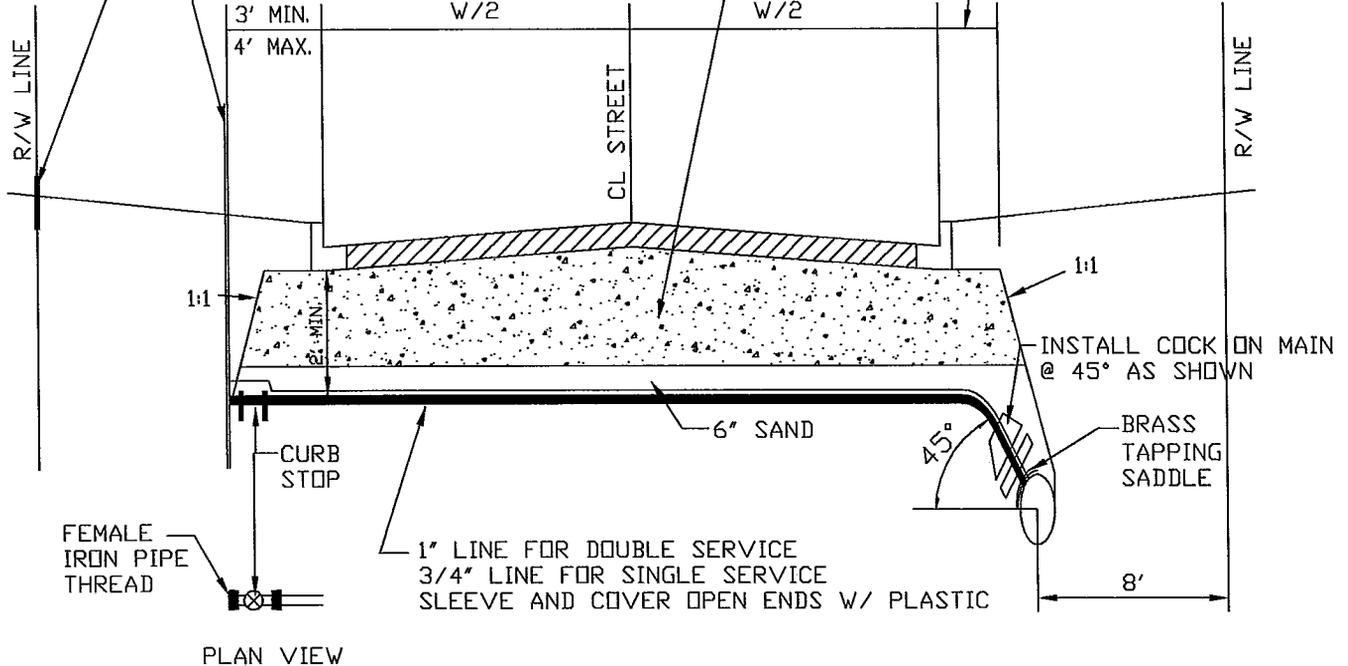

PLAN VIEW

NOTES:

1. LOT CORNERS SHALL BE STAKED PRIOR TO CONSTRUCTION OF SERVICE LINES, CROSSING TO BE ON LOT LINE.
2. DETECTABLE MYLAR MARKING TAPE (LIFEGUARD TYPE II OR EQUAL) TO BE INSTALLED OVER COPPER SERVICE AS SHOWN.
3. CROSSING NOT REQUIRED IN LOOPED CUL-DE-SAC.
4. COPPER OR DR 9 3408 PE SHALL BE USED FOR SERVICE LINES BUT SHALL NOT BE SPLICED.
5. CROSSING TO BE INSPECTED BEFORE TRENCH IS BACKFILLED.
6. SERVICE LINES SHALL BE PLACED IN SCHEDULE 40 PVC SLEEVE.
7. EACH SERVICE LINE SHALL BE PROVIDED WITH A SEPARATE CORPORATION CONNECTION.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
09_W_STREETCROSSING

STREET CROSSING DETAIL
WATER LINE

W9

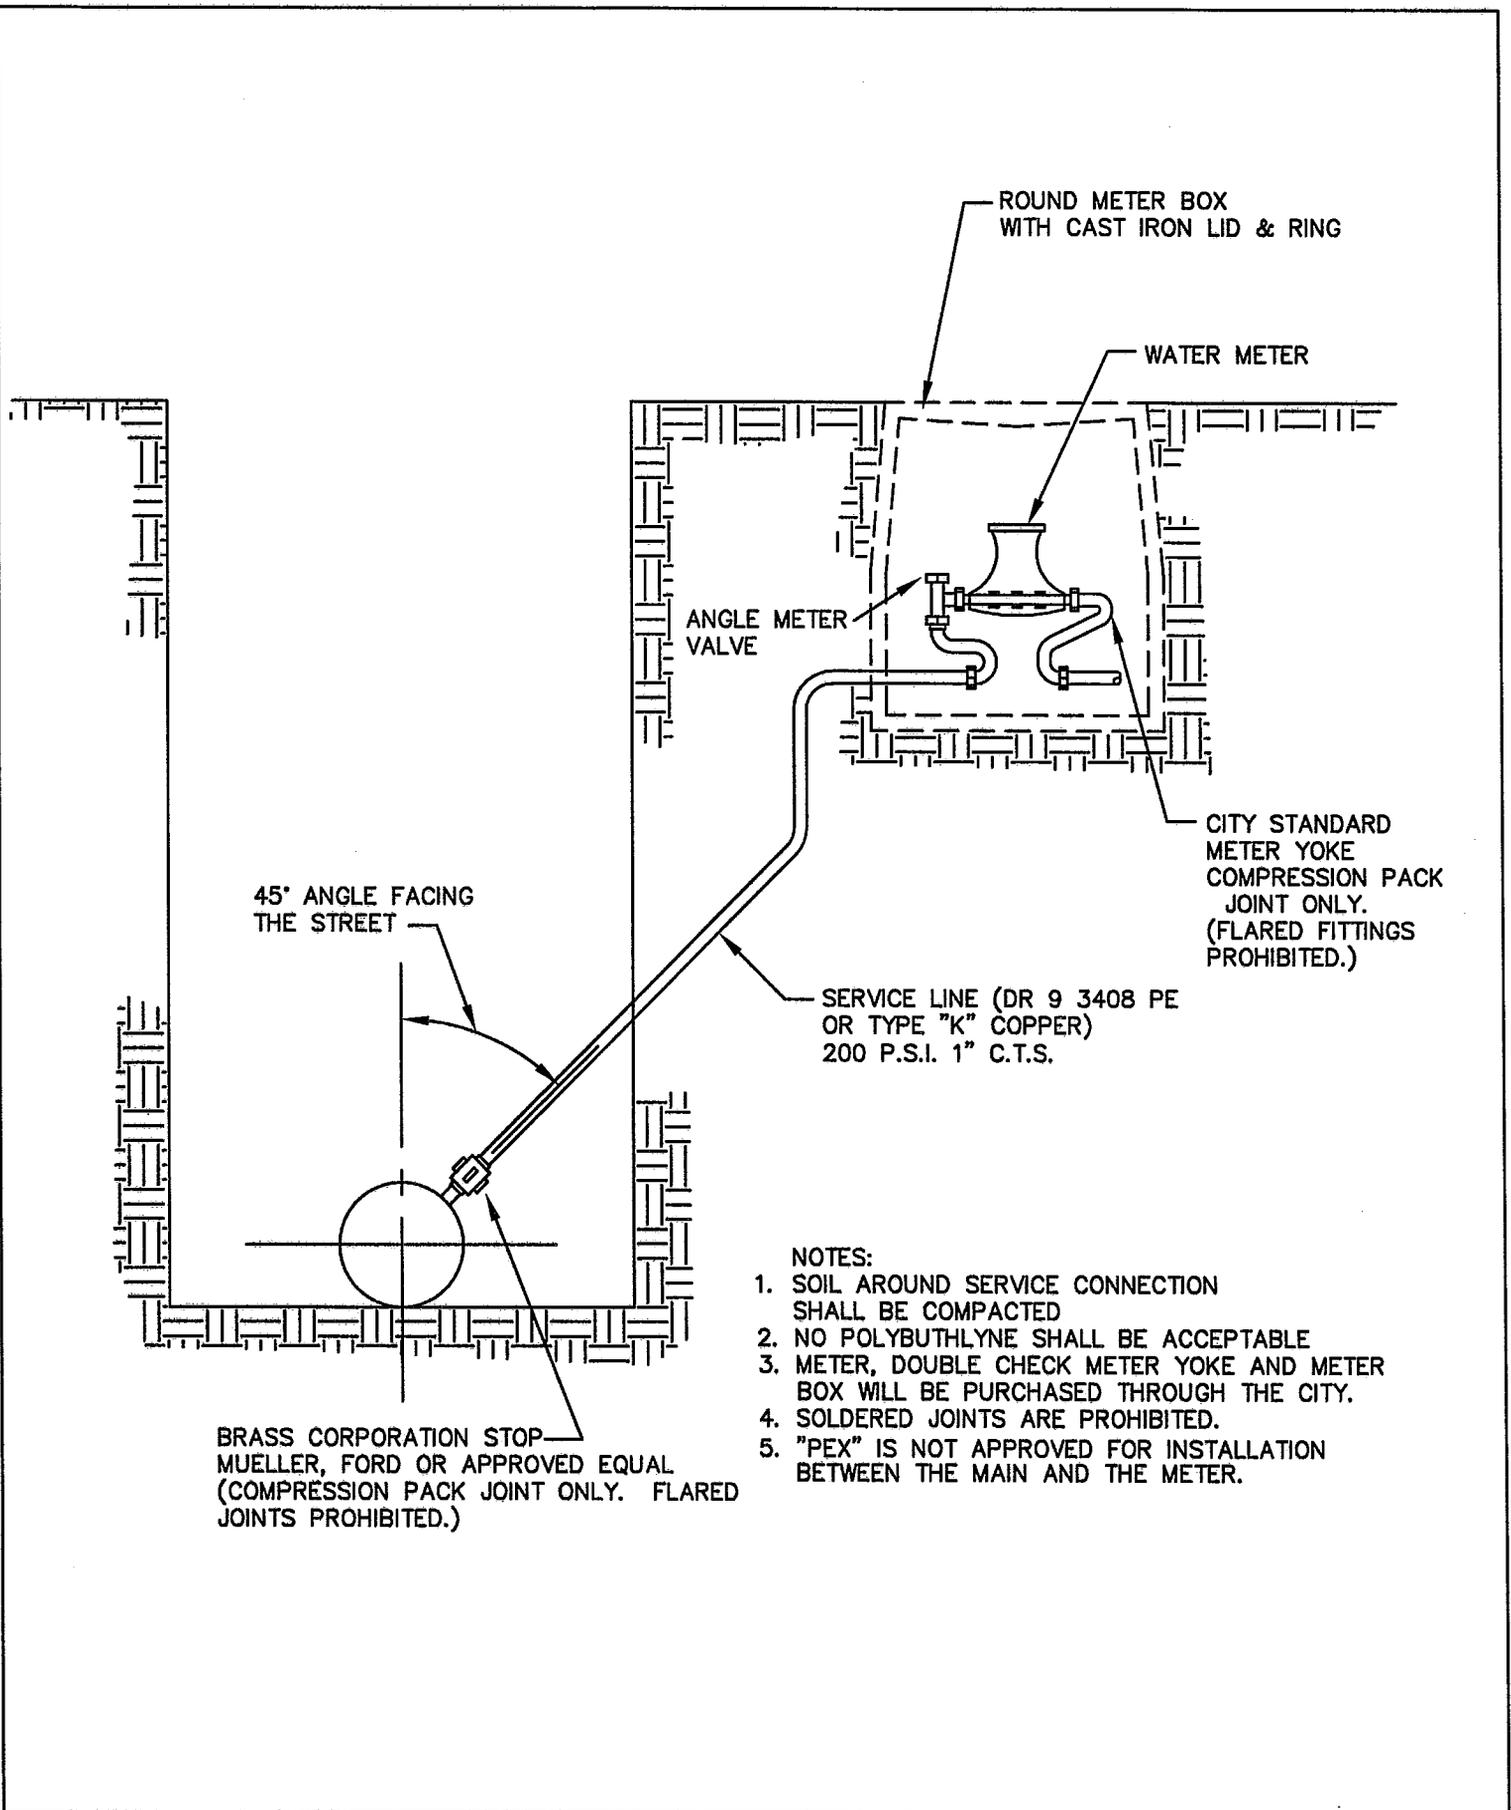

ROUND METER BOX WITH CAST IRON LID & RING

WATER METER

ANGLE METER VALVE

CITY STANDARD METER YOKE COMPRESSION PACK JOINT ONLY. (FLARED FITTINGS PROHIBITED.)

45° ANGLE FACING THE STREET

SERVICE LINE (DR 9 3408 PE OR TYPE "K" COPPER) 200 P.S.I. 1" C.T.S.

BRASS CORPORATION STOP MUELLER, FORD OR APPROVED EQUAL (COMPRESSION PACK JOINT ONLY. FLARED JOINTS PROHIBITED.)

NOTES:

1. SOIL AROUND SERVICE CONNECTION SHALL BE COMPACTED
2. NO POLYBUTHLYNE SHALL BE ACCEPTABLE
3. METER, DOUBLE CHECK METER YOKE AND METER BOX WILL BE PURCHASED THROUGH THE CITY.
4. SOLDERED JOINTS ARE PROHIBITED.
5. "PEX" IS NOT APPROVED FOR INSTALLATION BETWEEN THE MAIN AND THE METER.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD_DRAWINGS


DRAWING NAME:
10_WATERSERVICE

WATER SERVICE DETAIL
WATER LINE

W10

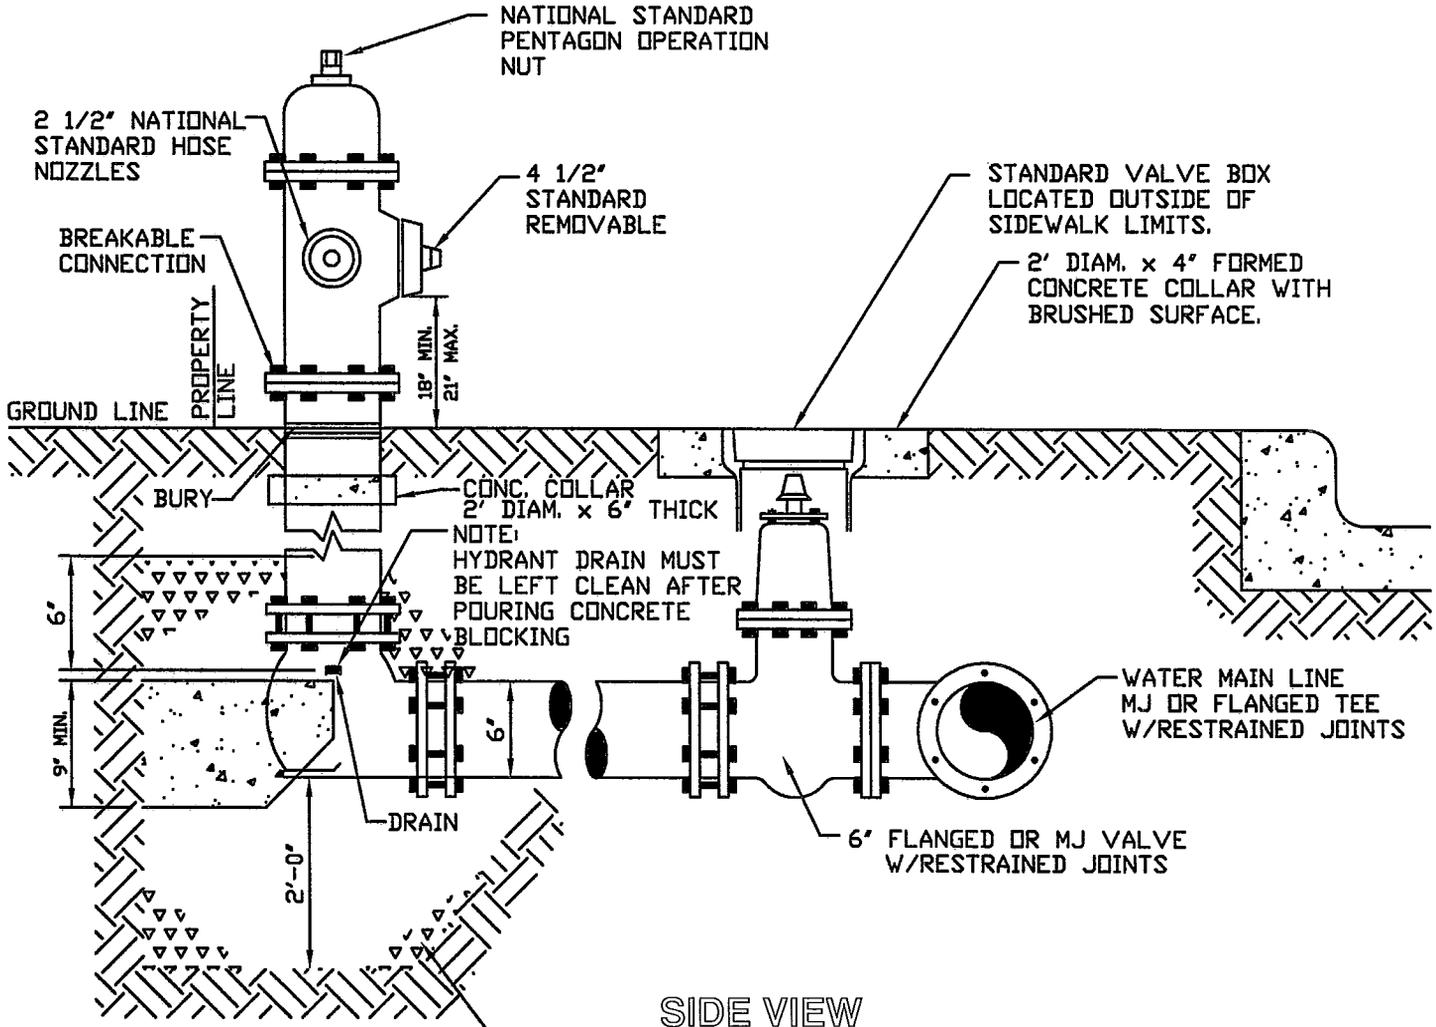

SIDE VIEW

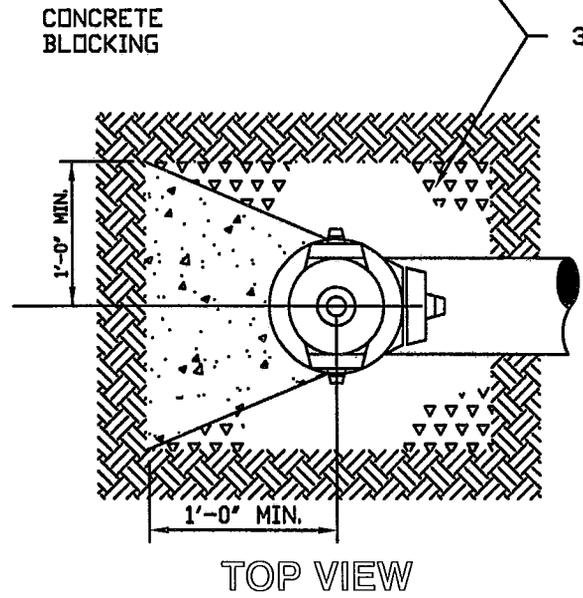

TOP VIEW

- NOTES:**
1. MINIMUM BURY DEPTH 3'
 2. LINE, VALVE, AND HYDRANT LOCATION AS APPROVED BY CITY
 3. ALL JOINTS, FITTINGS, AND VALVES SHALL BE RESTRAINED.

ASSEMBLY INCLUDES

- FIRE HYDRANT
- 6" NIPPLES
- 6" GATE VALVE
- 6" TEE
- VALVE BOX & PAD
- BLOCKING




**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO.:
STANDARD_DRAWINGS


DRAWING NAME:
11_FIREHYDRANT

**FIRE HYDRANT
ASSEMBLY DETAIL**

W11

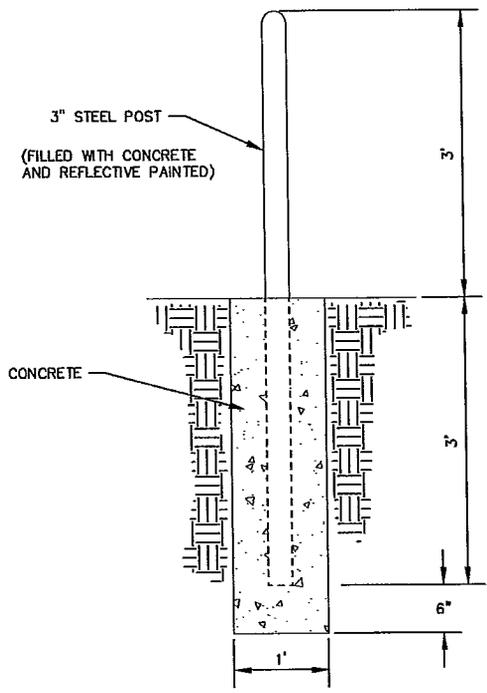

SIDE VIEW

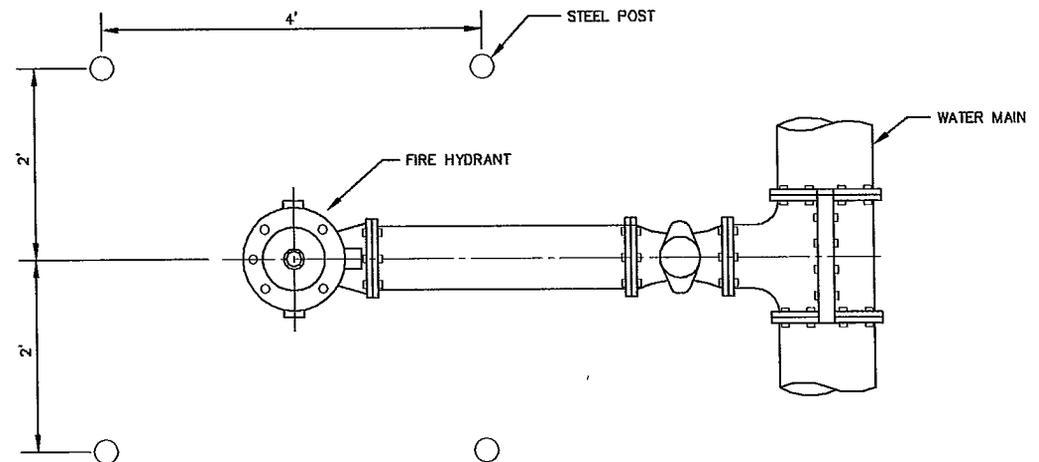

PLAN VIEW

(TYPICAL FOR HYDRANTS IN TRAFFIC AREAS)




**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO:
STANDARD_DRAWINGS

DRAWING NAME:
12_FHGUARDPOST

**FIRE HYDRANT
GUARD POST DETAIL**

W12

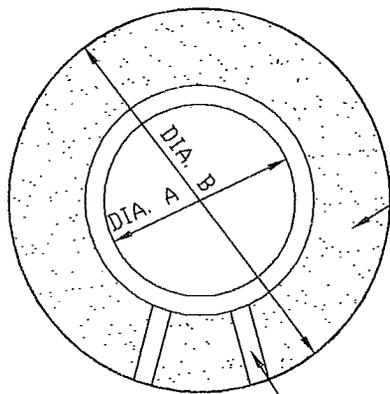

FILL ANNULAR SPACE BETWEEN
PIPE & CASING WITH SAND
AS REQUIRED BY UTILITY INSPECTORS

STEEL SKIDS OR OTHER APPROVED
SPACERS MAINTAINING GRADE & SUPPORT
OF PIPE THROUGH CASING.

PIPE & STEEL CASING SCHEDULE	
PIPE DIA. A	CASING DIA. B
4'	10'
6'	12'
8'	14'
10'	18'
12'	20'
16'	24'
18'	26'
20'	30'
24'	33'



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO:
STANDARD DRAWINGS

DRAWING NAME:
13_W_CONDUITDETAIL

CONDUIT DETAIL
WATER LINE

W13

2' DIA. x 4" FORMED CONCRETE COLLAR WITH BRUSHED SURFACE


MJ - TAPPED PLUG OR
MJ - REDUCER
- RESTRAIN FITTING

LINE SIZE AS SHOWN ON PLANS

VALVE BOX -
TYLER TWO-PIECE
SERIES 6859 OR 6855
OR APPROVED EQUAL

CONCRETE
BLOCKING

5' Max.

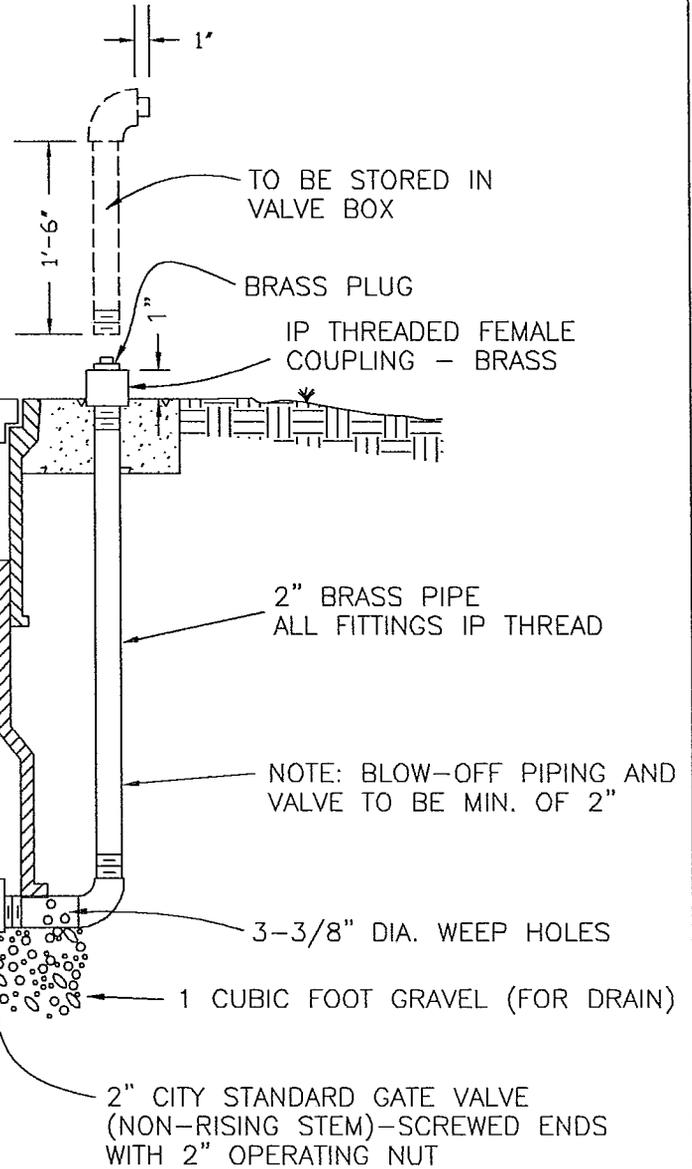

TO BE STORED IN
VALVE BOX

BRASS PLUG

IP THREADED FEMALE
COUPLING - BRASS

2" BRASS PIPE
ALL FITTINGS IP THREAD

NOTE: BLOW-OFF PIPING AND
VALVE TO BE MIN. OF 2"

3-3/8" DIA. WEEP HOLES

1 CUBIC FOOT GRAVEL (FOR DRAIN)

2" CITY STANDARD GATE VALVE
(NON-RISING STEM)-SCREWED ENDS
WITH 2" OPERATING NUT





CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS

DRAWING NAME:
14_W_STDBLOWOFF

BLOW-OFF VALVE
WATER LINE

W14

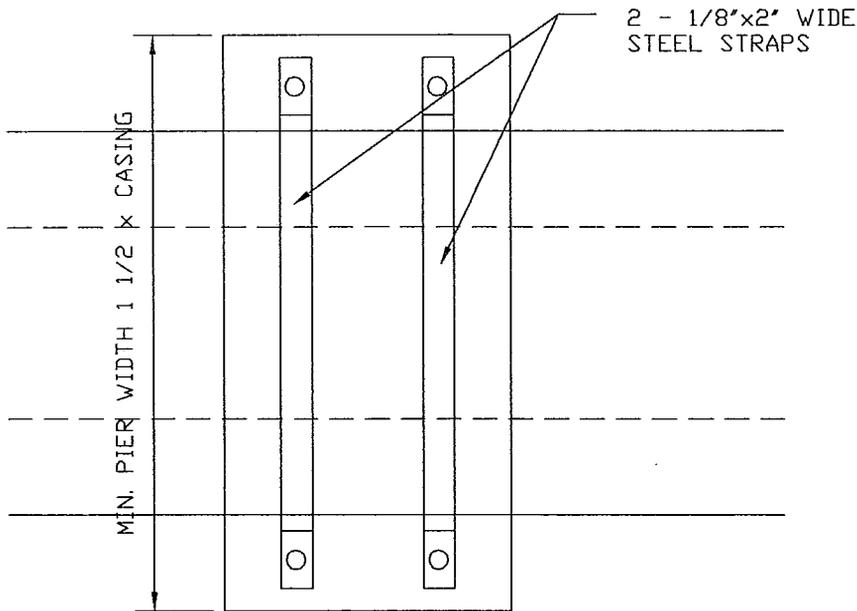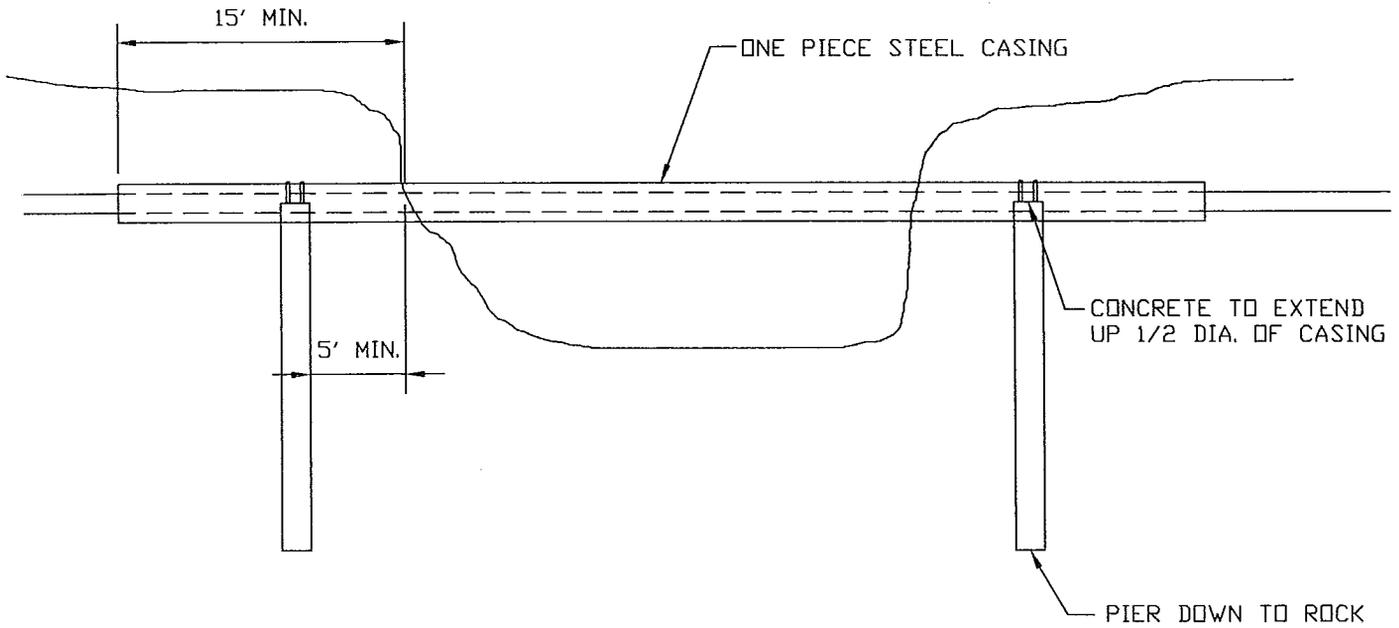


CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS

DRAWING NAME:
15_W_AERIAL


AERIAL CREEK CROSSING
WATER LINE

W15

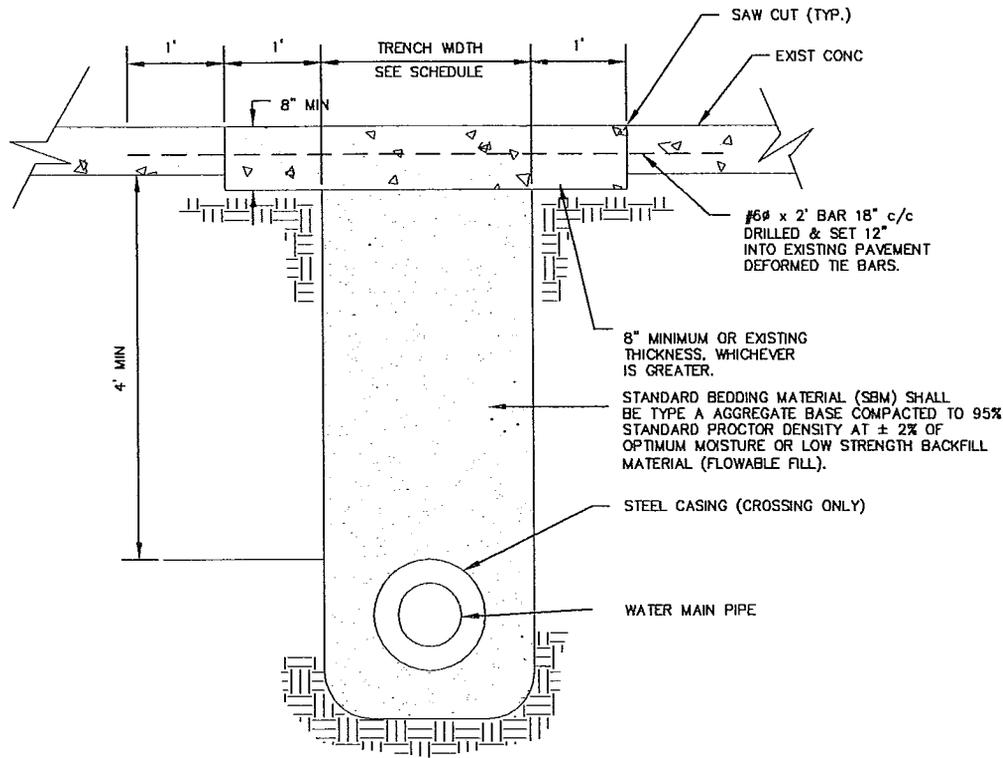

INSIDE PIPE DIAMETER (IN.)	STANDARD TRENCH WIDTH (IN.)
6	18
8	24
10	30
12	30
15	36
18	36
21	42
24	42
27	48
30	48
36	54
42	60
48	66

CONCRETE

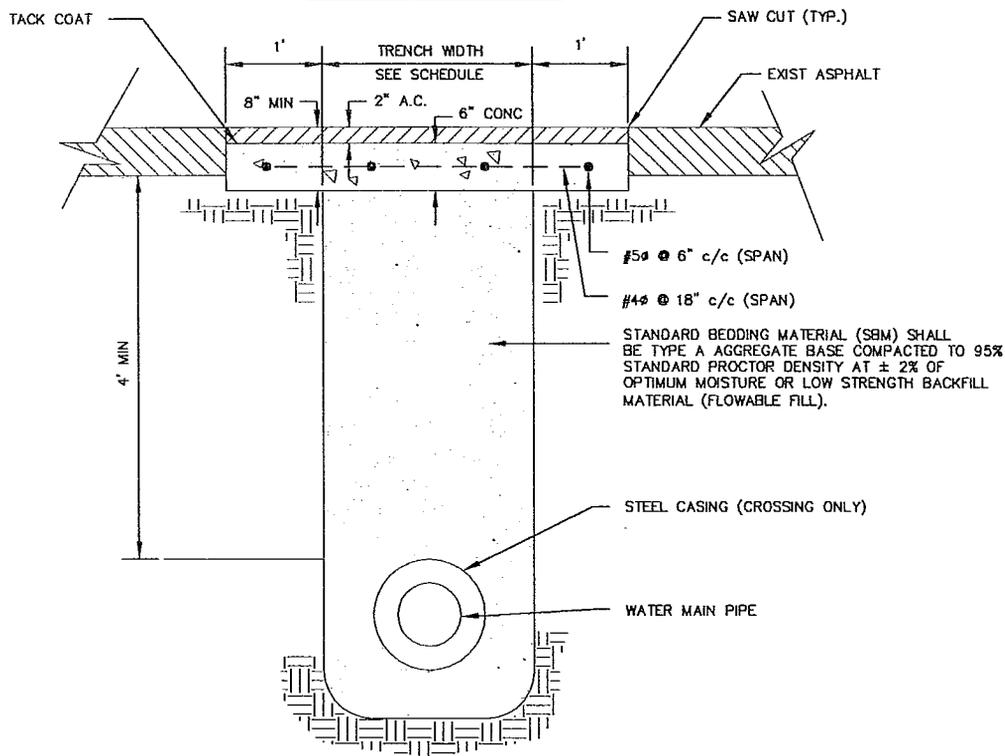

ASPHALT




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO:
STANDARD DRAWINGS


DRAWING NAME:
16_W_PAVEMENTREPAIRS

PAVEMENT CUTS & REPAIRS
WATER LINE


W16

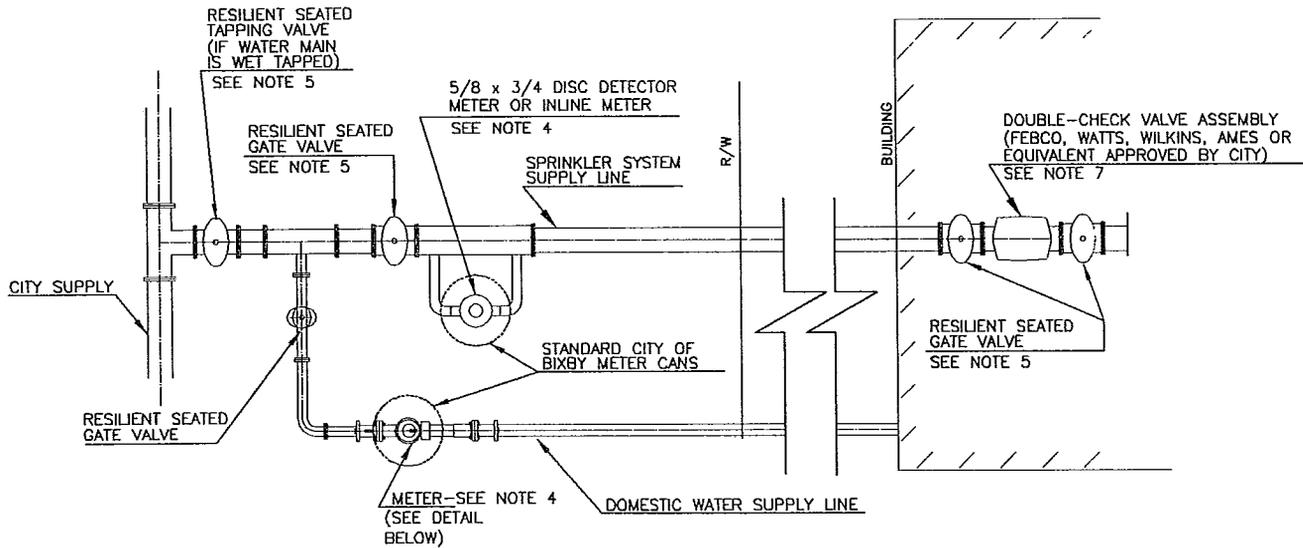

PLAN VIEW

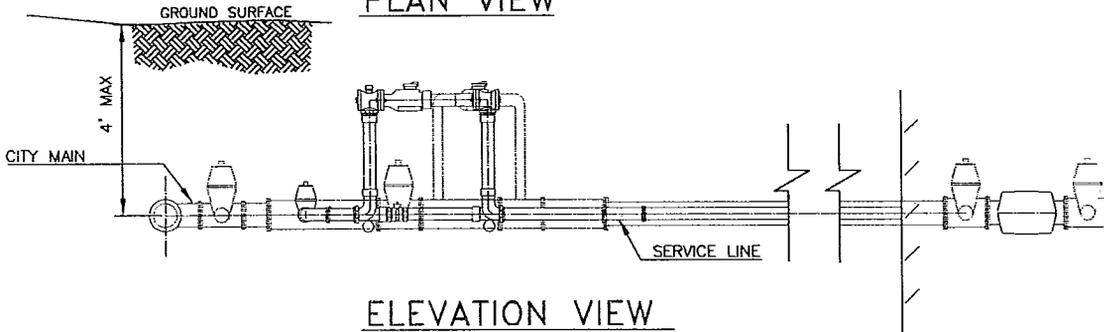

ELEVATION VIEW

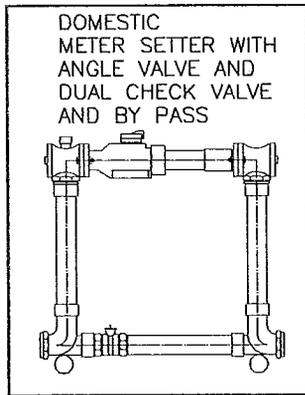

NOTES

1. VALVES & METERS SHALL BE LOCATED ON CITY PROPERTY OR DEDICATED EASEMENT.
2. ALL FIRE HYDRANTS SHALL HAVE CITY OF BIXBY THREADS.
3. METERS SHALL COMPLY WITH ALL CITY OF BIXBY STANDARDS AND SPECIFICATIONS.
4. METERS SHALL BE LOCATED 18" - 24" BELOW GROUND SURFACE. METER SHALL BE LOCATED IN STANDARD CITY OF BIXBY METER CAN.
5. VALVES SHALL BE INDICATING TYPE VALVES AS APPROVED BY CITY.
6. LOCATION OF THE FDC MUST BE APPROVED BY THE FIRE MARSHAL.
7. FOR FIRE SUPPRESSION AND IRRIGATION PURPOSES, A HIGH-DEMAND TURBINE METER MAY BE USED IN LIEU OF COMPOUND METER AS APPROVED BY THE CITY ENGINEER.
8. THE DOUBLE CHECK VALVE BACKFLOW PREVENTION DEVICE MAY BE LOCATED INSIDE THE BUILDING IN AN ACCESSIBLE AREA SUFFICIENTLY LARGE ENOUGH FOR MAINTENANCE AND TESTING AND FOR INSPECTION BY CITY OFFICIALS, OR IT MAY BE LOCATED IN AN OUTSIDE CONCRETE VAULT WITH THE METER (SEE OPTION B). LOCATION OF BACKFLOW PREVENTION DEVICE IS SUBJECT TO CITY APPROVAL.




**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**



PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
17_DETECTORMETERBLDG

**DETECTOR CHECK
DOMESTIC METER - BUILDING**

W17

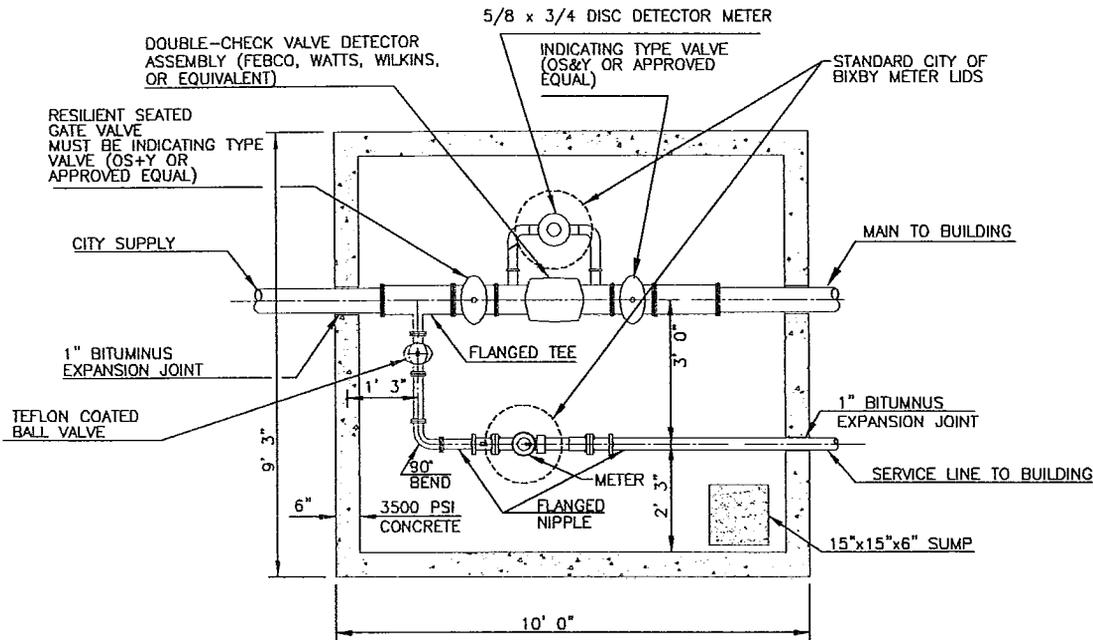

PLAN VIEW

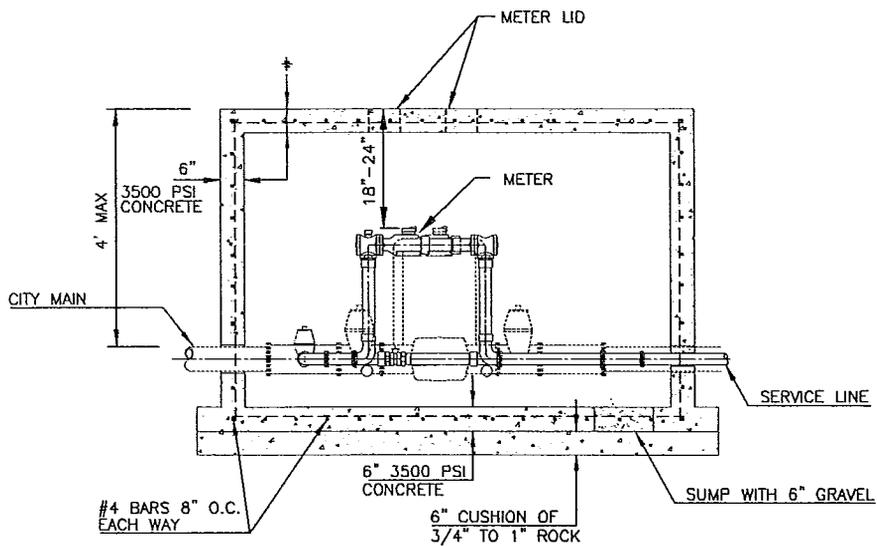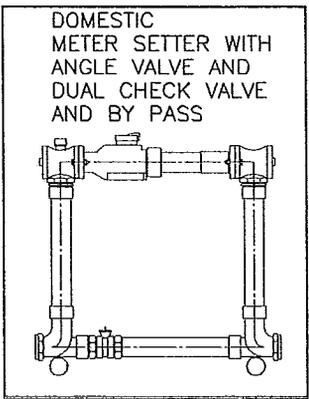

ELEVATION VIEW

NOTES

1. PIT TO BE LOCATED ON CITY PROPERTY OR DEDICATED EASEMENT.
 2. ALL FIRE HYDRANTS TO HAVE CITY OF BIXBY THREADS.
 3. PIT LID SHALL BE ONE REMOVABLE SECTION, MINIMUM THICKNESS 6".
 4. METERS MUST COMPLY WITH ALL CITY OF BIXBY STANDARDS AND SPECIFICATIONS.
 5. DETECTOR METER SHALL BE LOCATED 18" - 24" BELOW TOP OF PIT.
 6. IN AREAS WHERE PIT IS SUBJECT TO FLOODING, THE DISCHARGE VENT SHALL BE VENTED ABOVE FLOOD LEVEL OR PROTECTED FROM SIPHONING, AS DIRECTED BY CITY ENGINEER.
 7. LOCATION OF THE FDC MUST BE APPROVED BY THE FIRE MARSHAL.
 8. FOR FIRE SUPPRESSION AND IRRIGATION PURPOSES, A HIGH-DEMAND TURBINE METER MAY BE USED IN LIEU OF COMPOUND METER AS APPROVED BY THE CITY ENGINEER.
- * CONCRETE ON TOP OF PIT TO BE 8" THICK WHEN PIT IS LOCATED IN DRIVING LANE OR PARKING AREA.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
18_DETECTORMETERPIT

DETECTOR CHECK
DOMESTIC METER - PIT

W18

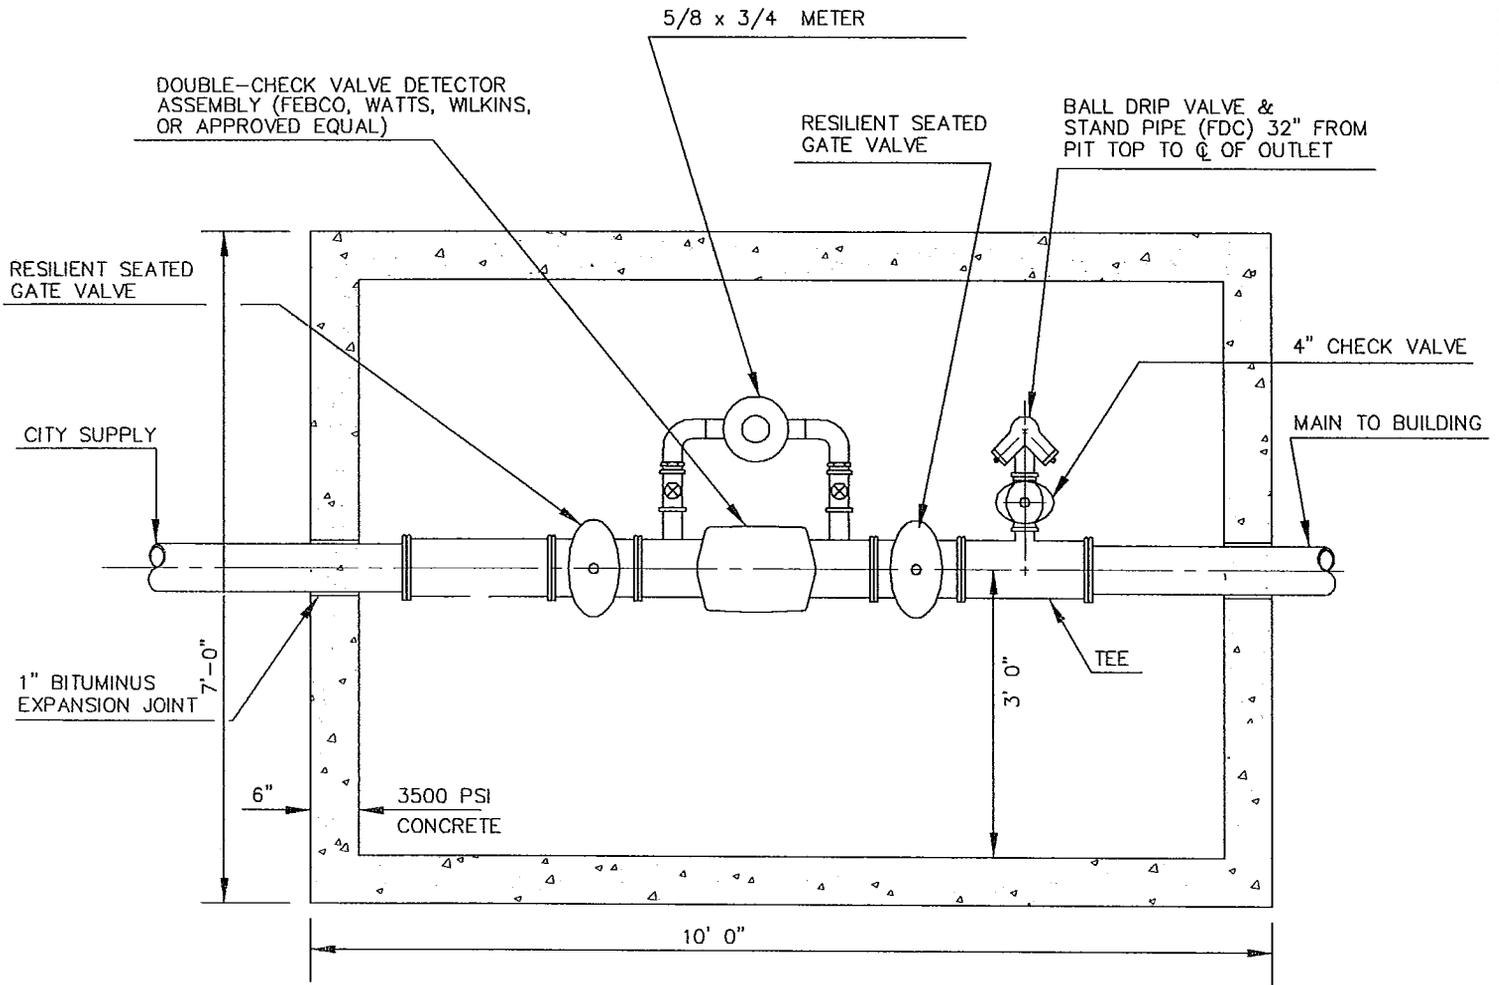


CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
19 DETECTOR NOMETER


DETECTOR CHECK
WITHOUT METER

W19

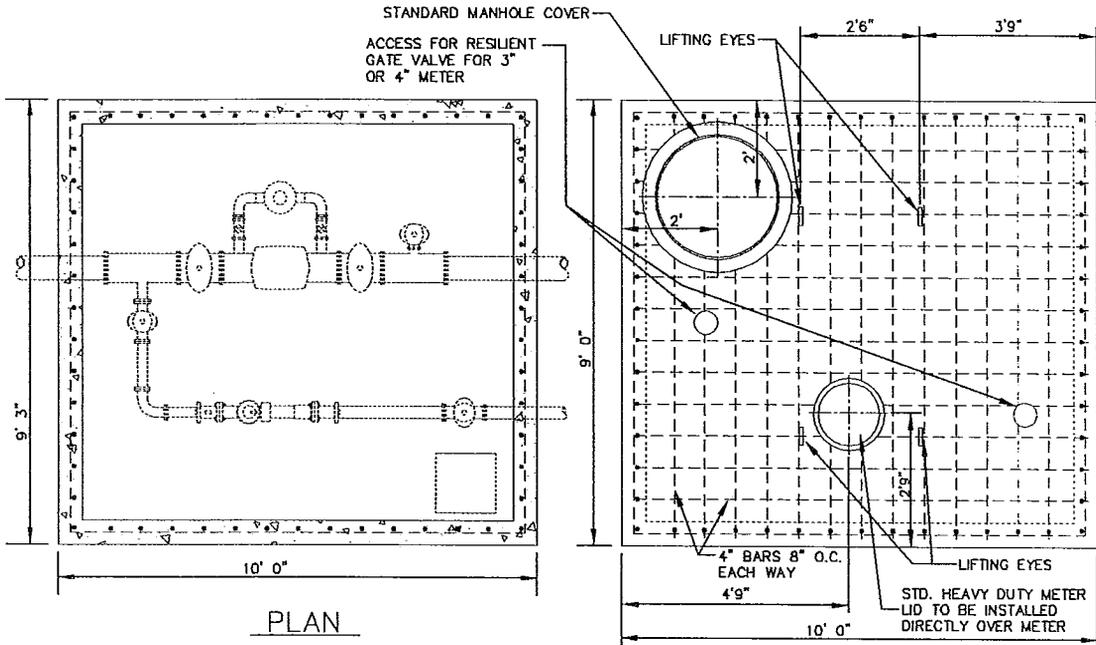

PLAN

PLAN TOP SECTION

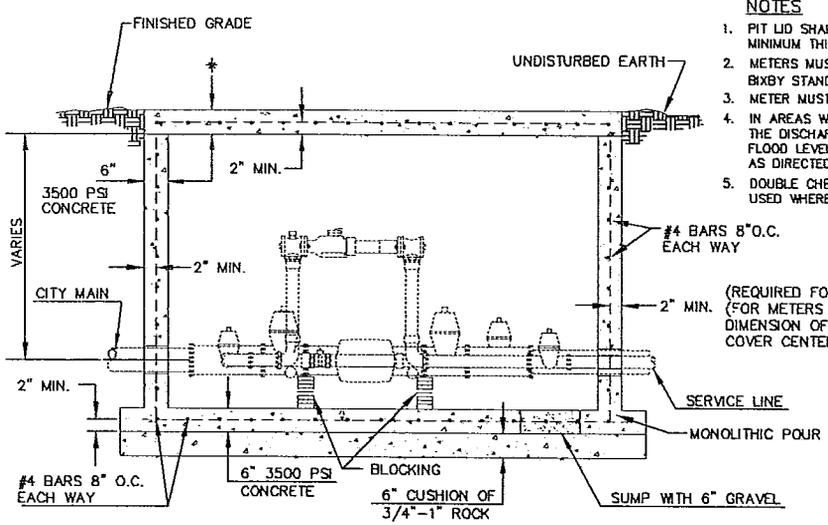

ELEVATION

NOTES

1. PIT LID SHALL BE ONE REMOVABLE SECTION, MINIMUM THICKNESS 6"
2. METERS MUST COMPLY WITH ALL CITY OF BIXBY STANDARDS AND SPECIFICATIONS.
3. METER MUST BE CALIBRATED PRIOR TO INSTALLATION.
4. IN AREAS WHERE PIT IS SUBJECT TO FLOODING, THE DISCHARGE VENT SHALL BE VENTED ABOVE FLOOD LEVEL OR PROTECTED FROM SIPHONING, AS DIRECTED BY CITY ENGINEER.
5. DOUBLE CHECK VALVE ASSEMBLY MAY BE USED WHERE RECOMMENDED BY AWWA.

(REQUIRED FOR METERS 3" AND OVER.)
 (FOR METERS 2" AND LESS, AN INSIDE DIMENSION OF 4"x4" STANDARD METER COVER CENTERED OVER METER IS REQUIRED.)

* CONCRETE ON TOP OF PIT TO BE 8" THICK WHEN PIT IS LOCATED IN DRIVING LANE OR PARKING AREA.




CITY OF BIXBY, OKLAHOMA
 ENGINEERING DEPARTMENT

PROJECT NO: STANDARD DRAWINGS
DRAWING NAME: 20_METERPITDETECTOR

STANDARD METER PIT
 DETECTOR CHECK

W20

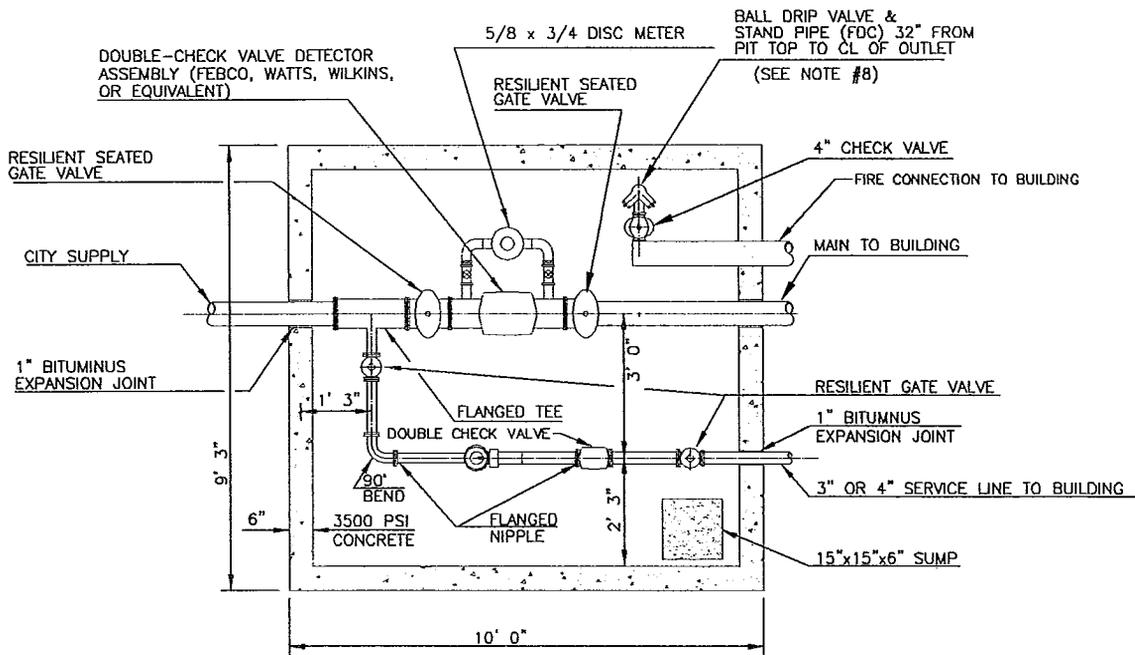


PLAN VIEW

NOTES

1. PIT TO BE LOCATED ON CITY PROPERTY OR DEDICATED EASEMENT.
2. ALL FIRE HYDRANTS TO HAVE CITY OF BIXBY THREADS.
3. PIT LID SHALL BE ONE REMOVABLE SECTION, MINIMUM THICKNESS 6".
4. METERS MUST COMPLY WITH ALL CITY OF BIXBY STANDARDS AND SPECIFICATIONS.
5. METER MUST BE CALIBRATED PRIOR TO INSTALLATION.
6. IN AREAS WHERE PIT IS SUBJECT TO FLOODING, THE DISCHARGE VENT SHALL BE VENTED ABOVE FLOOD LEVEL OR PROTECTED FROM SIPHONING, AS DIRECTED BY CITY ENGINEER.
7. DOUBLE CHECK VALVE ASSEMBLY MAY BE USED WHERE RECOMMENDED BY AWWA.
8. LOCATION OF THE FDC MUST BE APPROVED BY THE FIRE MARSHAL.
9. FOR FIRE SUPPRESSION AND IRRIGATION PURPOSES, A HIGH-DEMAND TURBINE METER MAY BE USED IN LIEU OF COMPOUND METER AS APPROVED BY THE CITY ENGINEER.

* CONCRETE ON TOP OF PIT TO BE 8" THICK WHEN PIT IS LOCATED IN DRIVING LANE OR PARKING AREA.

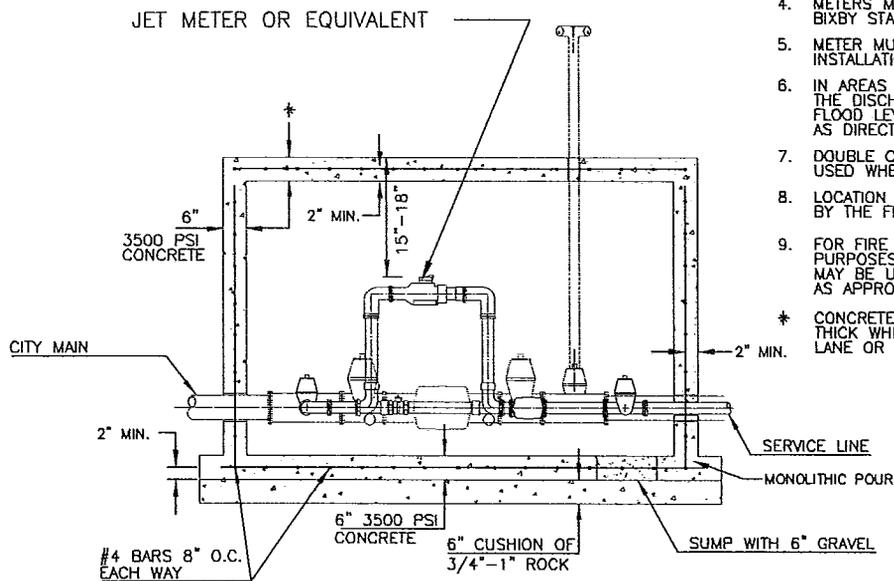

ELEVATION VIEW



**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
21_DETECTORS-4METER


**DETECTOR CHECK
3" OR 4" METER VAULT**

W21

1. All sanitary sewer collection systems shall be designated in accordance with the current City of Bixby Public Works Standard Construction Specifications.
2. All Sanitary Sewer Collection System Construction shall be inspected by the Public Works Department Utility Inspectors, in accordance with City Policy.
3. C900 CPV pipe shall be used at any point where concrete encasement is specified, or where a water main is within two (2) feet of the sewer. Pipe shall be sleeved 5 feet each side of water pipe.
4. Concrete encasement will be required at any point where centerline cut to original ground is 30 inches or less.
5. All taps shall be installed during lateral construction.
6. Special risers shall be installed for each lot where the main sewer depth will be fifteen (15) feet or greater below finished grade.
7. Bedding, backfill, and compaction shall be in accordance with Standard Drawings. Street backfill and compaction requirements shall extend two (2) feet back of curb. When replacing a sewer in service 3/8-inch chips shall be used for bedding and initial backfill.
8. Taps on existing lines, that do not have taps installed during construction, shall be installed in accordance with Standard Drawings.
9. All force mains constructed of non-metallic pipe shall have a No. 8 bare copper conductor wire taped to the top surface of the pipe and bolted to lift station and manhole ring.
10. When working in or adjacent to existing subdivisions only one (1) days worth of trench may be open at a given time. This requirement may be modified, in writing, by the Public Works Director for a specific project.
11. Road closures must be coordinated a minimum of forty-eight (48) hours in advance. Roads will not be closed for over eight (8) hours without written permission from the Public Works Director.
12. Dig through locator tape will be buried 2 feet above the sewer line.
13. Service lines running across roadways shall be schedule 40 PVC. For lines with less than 4' of cover, lines shall be be flowfilled in-place to at least 12" above the top of pipe with the remainder of the trench to be backfilled with aggregate up to roadway subgrade. For lines with greater than 4' of cover, the service lines shall be bedded with sand to 6" above the top of pipe with the remainder of the trench to be backfilled with aggregate up to roadway subgrade.
14. A water tight plug shall be installed in any new line at its entrance into an existing manhole. Upon satisfactory completion of the project, permission will be given by the City Engineer to remove the plug.
15. All stubs shall be one length of bell-end pipe extending through the manhole wall and shall be tightly plugged.
16. At abandoned manholes and sewers, plug all sewers at manholes, tear manholes down 3' below finished ground elevation, and fill balance of manholes with approved backfill.
17. All abandoned manhole rings and lids shall be delivered to the City of Bixby Water Garage.



**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**


 PROJECT NO.:
 STANDARD_DRAWINGS
 DRAWING NAME:
 00_STDSEWERNOTES

**STANDARD CONST. NOTES
SANITARY SEWER LINE**

S0




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO: STANDARD_DRAWINGS
DRAWING NAME: 01_SBEDDINGDETAIL

BEDDING DETAIL
SANITARY SEWER LINE

S1

NON-PAVED AREAS		PAVED AREAS	
P V C	DUCTILE IRON	P V C	DUCTILE IRON
EXCAVATED MATERIAL	EXCAVATED MATERIAL	CONCRETE	CONCRETE
SELECT FILL	SELECT FILL	CRUSHED ROCK	CRUSHED ROCK
SAND	SAND	CRUSHED ROCK	CRUSHED ROCK
SAND	SAND	3/8" CHIPS	3/8" CHIPS
3/8" CHIPS	3/8" CHIPS	3/8" CHIPS	3/8" CHIPS

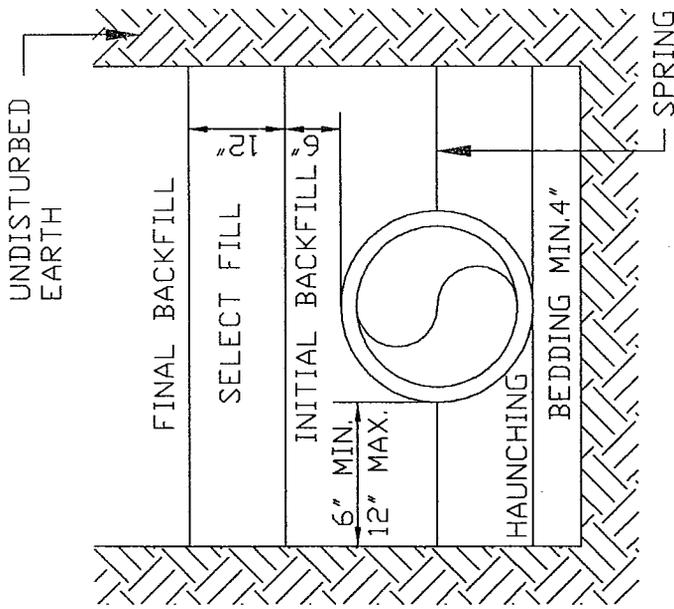

NOTES:

1. SELECT FILL CONSISTS OF EXCAVATED MATERIALS CONTAINING NO ROCKS LARGER THAN 2 INCHES.
2. CRUSHED ROCK SHALL BE ODOT TYPE "A" ROCK.
3. BEDDING REQUIRED FOR ALL SANITARY SEWER REPLACEMENT PROJECTS IN ROCK EXCAVATION AND FOR LEVELING TRENCH IN NEW INSTALLATION.
4. COMPACTION REQUIREMENTS:
 - a. NON-PAVED AREAS: 90% MAXIMUM STANDARD PROCTOR DENSITY FOR COHESIONLESS SOILS AND 85% FOR COHESIVE SOILS.
 - b. PAVED AREAS: 95% MAXIMUM STANDARD PROCTOR DENSITY FOR COHESIONLESS SOILS.
5. FILLS OVER 10 FEET DEEP - MATERIAL IN THE AREA FROM SELECT FILL TO BEDDING SHALL BE 3/4" CRUSHER RUN, WELL GRADED.
6. FLOWABLE FILL MAY BE SUBSTITUTED FOR ALL MATERIALS IN ROAD CROSSING.

SEWER PIPE REQUIREMENTS

LOCATION/DEPTH	SIZE	PIPE TYPE	NOTES
≤ 30" cover	8"-12"	C-900 PVC DR18	Conc. Encase
≤ 30" cover	>12"	C-900 PVC DR18	Conc. Encase
31" to 15.9'	All	SDR 35 OR SDR 26 PVC	
16' to 25'	8"-15"	SDR 26 PVC	
16' to 25'	>15"	C-905 PVC DR18	
25' or deeper	8"-12"	C-900 PVC DR18	
25' or deeper	>12"	C-905 PVC DR18	
Under Streets (open cut)	8"-12"	C-900 PVC DR14	
Under Streets (bore)	All	SDR 26 PVC	
Creek Crossings	8"-12"	C-900 PVC DR18	Conc. Encase
Creek Crossings	>12"	C-905 PVC DR18	Conc. Encase
W.L. within 2' vertical	8"-12"	C-900 PVC DR18	
W.L. within 2' vertical	>12"	C-905 PVC DR18	
Service lines to 15' deep	4"-6"	Schedule 40	
Risers over 15' deep	4"-6"	Same as main line	

NOTES:

1. ULTRA-RIB PIPE CAN BE SUBSTITUTED FOR SDR 35 ON SIZES 15' OR LARGER.
2. SANITARY SEWER LINES UNDER RESIDENTIAL STREETS DO NOT REQUIRE SLEEVES. HOWEVER, SANITARY SEWER LINES UNDER RESIDENTIAL STREETS SHALL BE CONSTRUCTED OF AWWA C-900 PVC, DR 14 FOR THE ENTIRE RUN OF PIPE BETWEEN MANHOLES LOCATED ON EITHER SIDE OF THE STREET CROSSING.




**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**


 PROJECT NO.:
 STANDARD DRAWINGS
 DRAWING NAME:
 02_SEWERPIPEMATL

**PIPE MATERIALS
SANITARY SEWER LINE**

S2

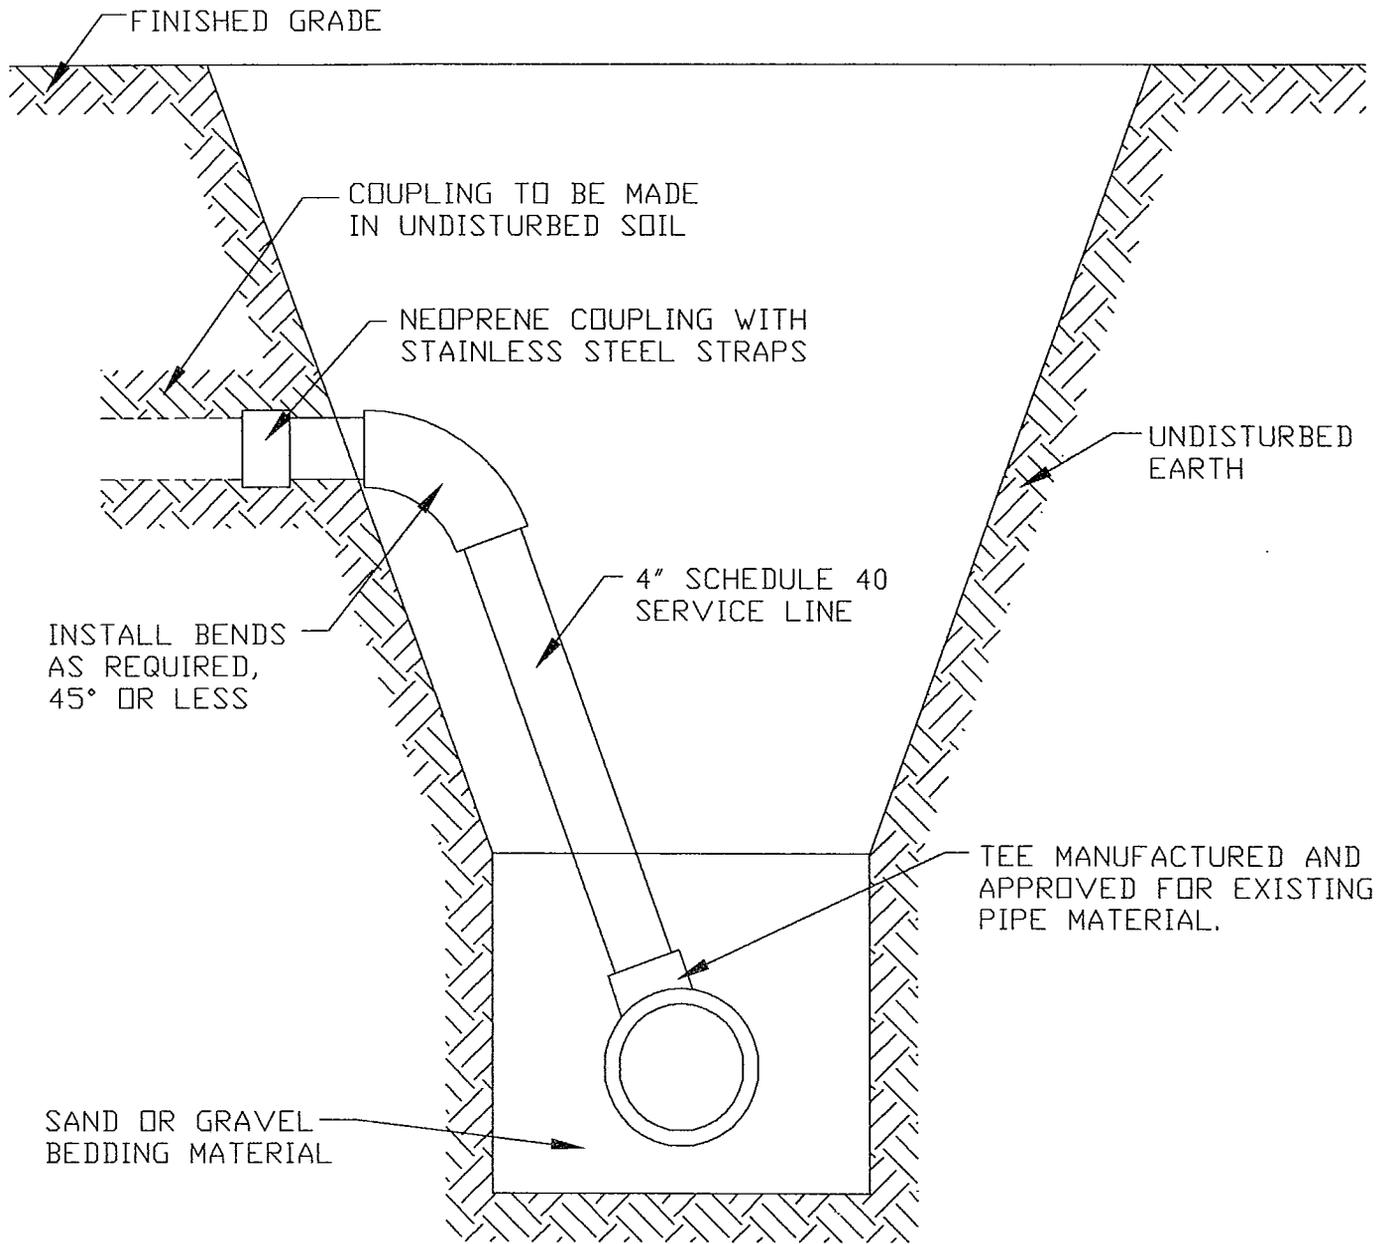

NOTES:

1. PVC SHOWN, HOWEVER, CLAY TILE, CONCRETE, AND DUCTILE IRON SHALL BE TAPPED IN SAME MANNER WITH CHANGE OF TAPPING SADDLE AND EXPANDING POLYURETHANE IN PLACE OF SOLVENT WELDING.
2. ALL MAIN LINE HOLES TO BE SAWED OR DRILLED AND COUPON PRESENTED AT TIME OF INSPECTION.
3. TAPS SHALL BE LEFT UNCOVERED FOR ONE (1) FOOT ON EACH SIDE OF SADDLE, UNTIL TAP IS INSPECTED.



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT


PROJECT NO.:
STANDARD DRAWINGS

DRAWING NAME:
03_EXISTSEWERTAP

TAP ON EXISTING
SANITARY SEWER LINE

S3

LINEGUARD TYPE II DETECTABLE
MYLAR MARKING TAPE OR EQUAL
(LABELED "CAUTION-SEWER LINE BELOW")

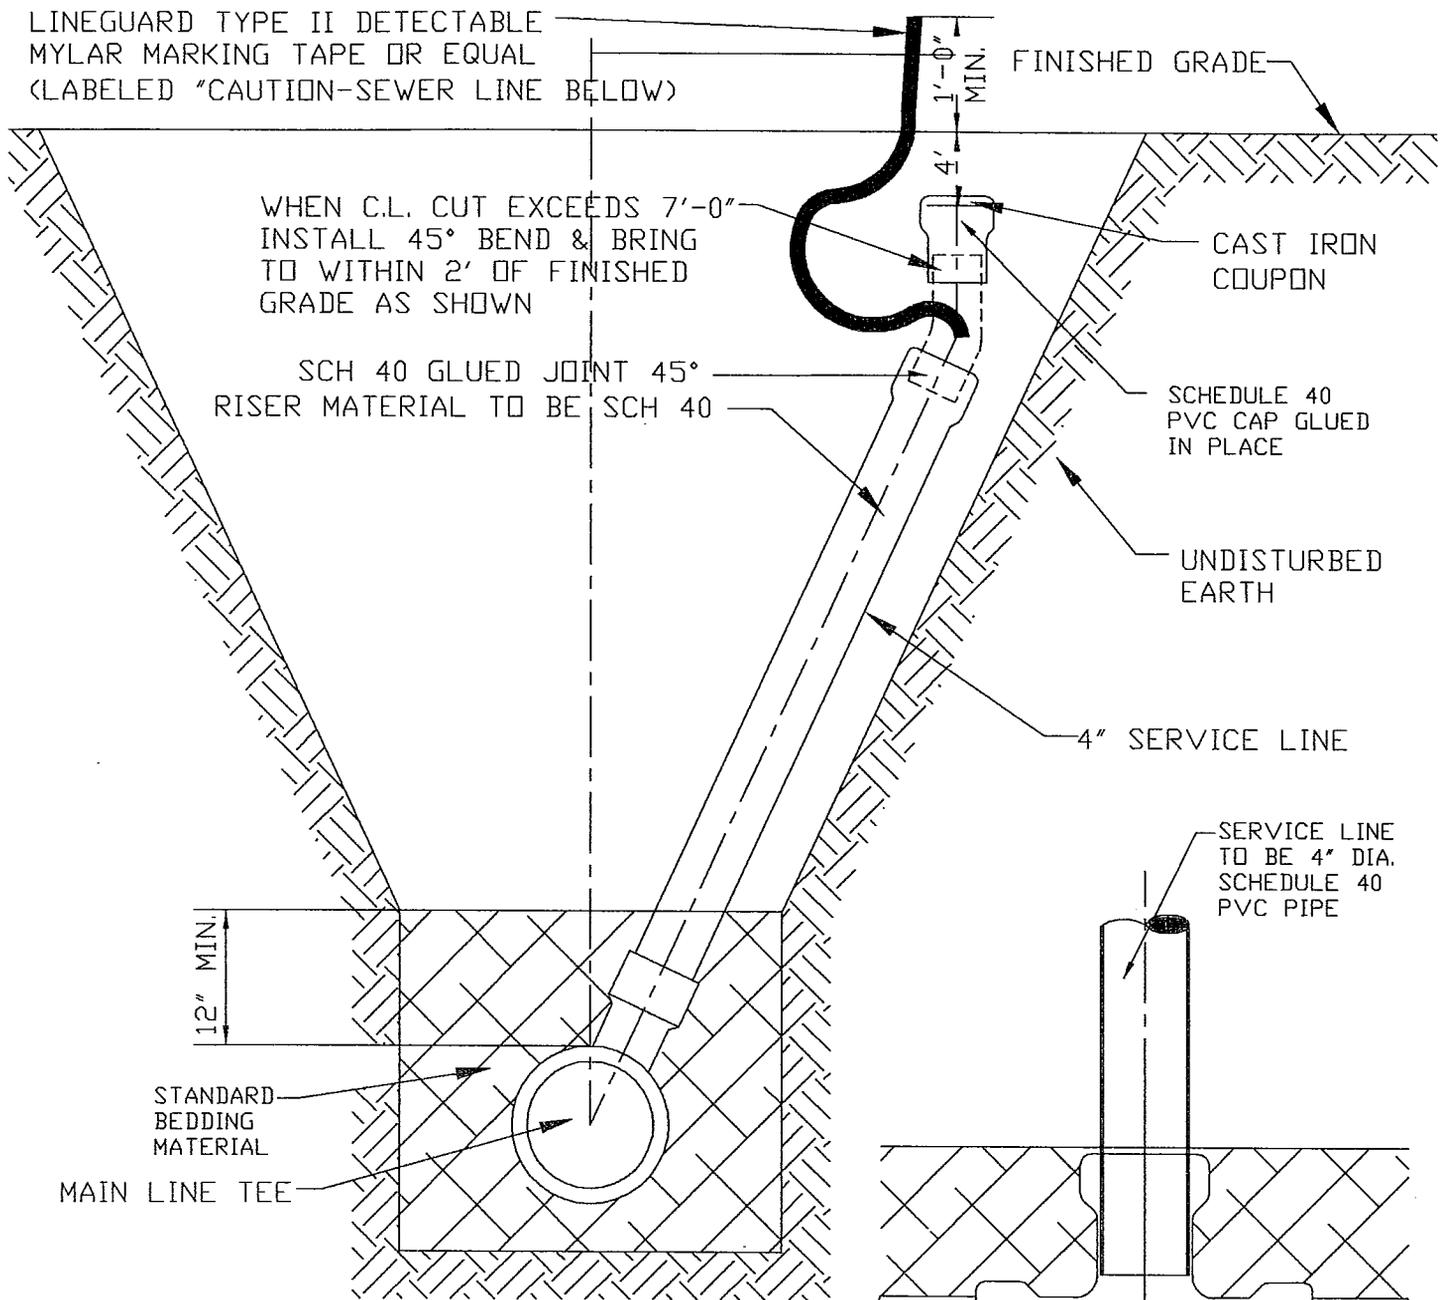

WHEN C.L. CUT EXCEEDS 7'-0"
INSTALL 45° BEND & BRING
TO WITHIN 2' OF FINISHED
GRADE AS SHOWN

SCH 40 GLUED JOINT 45°
RISER MATERIAL TO BE SCH 40

FINISHED GRADE

CAST IRON
COUPON

SCHEDULE 40
PVC CAP GLUED
IN PLACE

UNDISTURBED
EARTH


4" SERVICE LINE

SERVICE LINE
TO BE 4" DIA.
SCHEDULE 40
PVC PIPE

12" MIN.

STANDARD
BEDDING
MATERIAL

MAIN LINE TEE

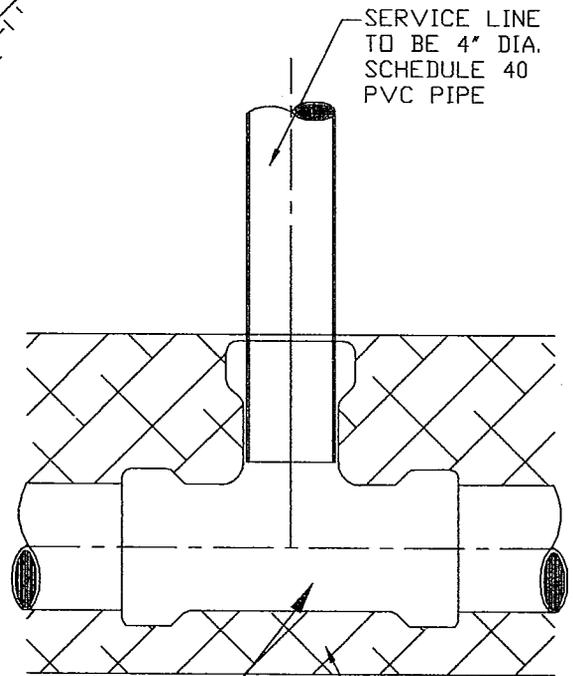

8" TEE
WITH SCH 40
4" BRANCH

STANDARD
BEDDING
MATERIAL

NOTE:

8' POST WITH FOUR-FOOT BURY SHALL BE
REQUIRED TO MARK EACH TAP AS PER
SECTION 315 OF THE STANDARD
SPECIFICATIONS.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
04_S_RISERNORMAL

SANITARY SEWER TAP
NORMAL TRENCH

S4

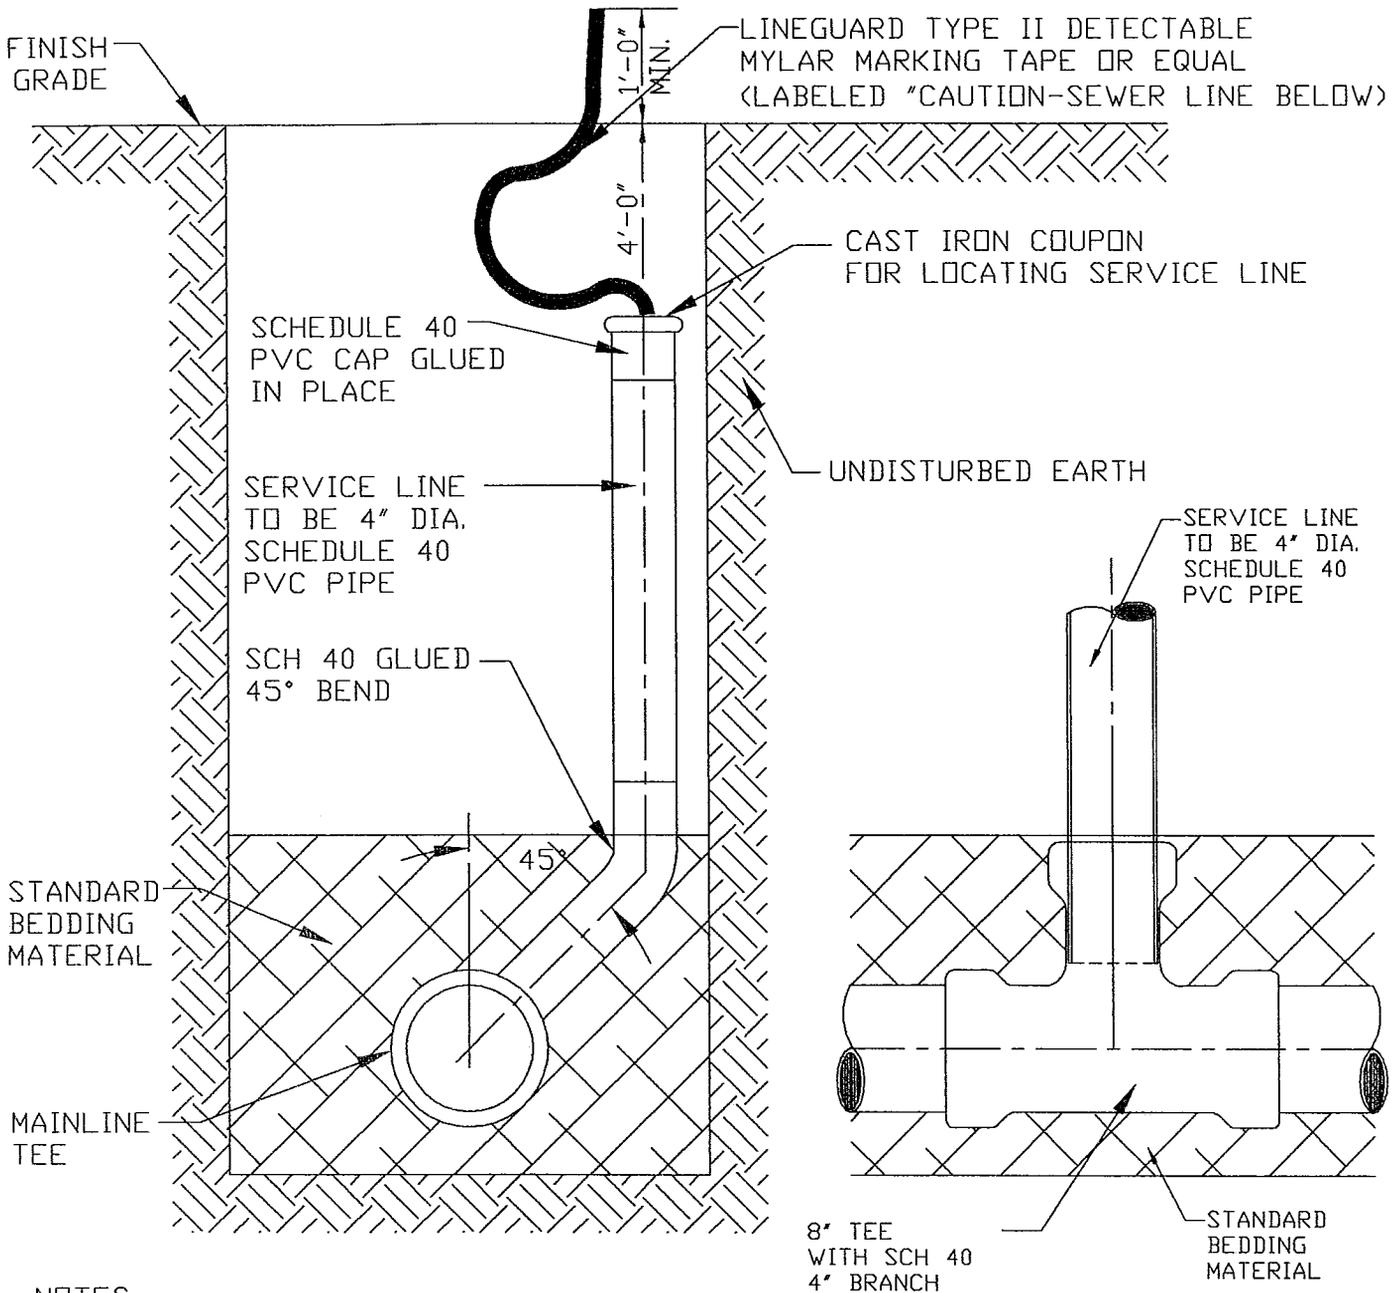

NOTES:

1. ALL NEW SANITARY SEWER LINES SHALL HAVE TAPS INSTALLED AS SHOWN ON THIS DETAIL FOR LINES UP TO 15 FEET DEEP. OVER 15 FEET DEEP STANDARD DRAWING S7 WILL BE USED.
2. THE TAP SHALL BE LOCATED AT THE FIRST JOINT AT LEAST FIVE (5) FEET UPSTREAM FROM THE DOWNSTREAM PROPERTY LINE. THE EXACT LOCATION SHALL BE NOTED ON THE AS-BUILT PLANS AS A DISTANCE IN FEET FROM THE NEAREST MANHOLE.
3. FOR WIDE TRENCHES THE LAYOUT ON STANDARD DRAWING SS 04 WILL BE USED.
4. 8' POST WITH FOUR-FOOT BURY SHALL BE REQUIRED TO MARK EACH TAP AS PER SECTION 315 OF THE STANDARD SPECIFICATIONS.
5. NARROW TRENCH TAP TO ONLY BE USED WITH PRIOR APPROVAL OF CITY ENGINEER.



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT


PROJECT NO:
STANDARD DRAWINGS

DRAWING NAME:
05_S_RISE/NARROW

SANITARY SEWER TAP
NARROW TRENCH

S5

LINEGUARD TYPE II DETECTABLE
MYLAR MARKING TAPE OR EQUAL
(LABELED "CAUTION-SEWER LINE BELOW")

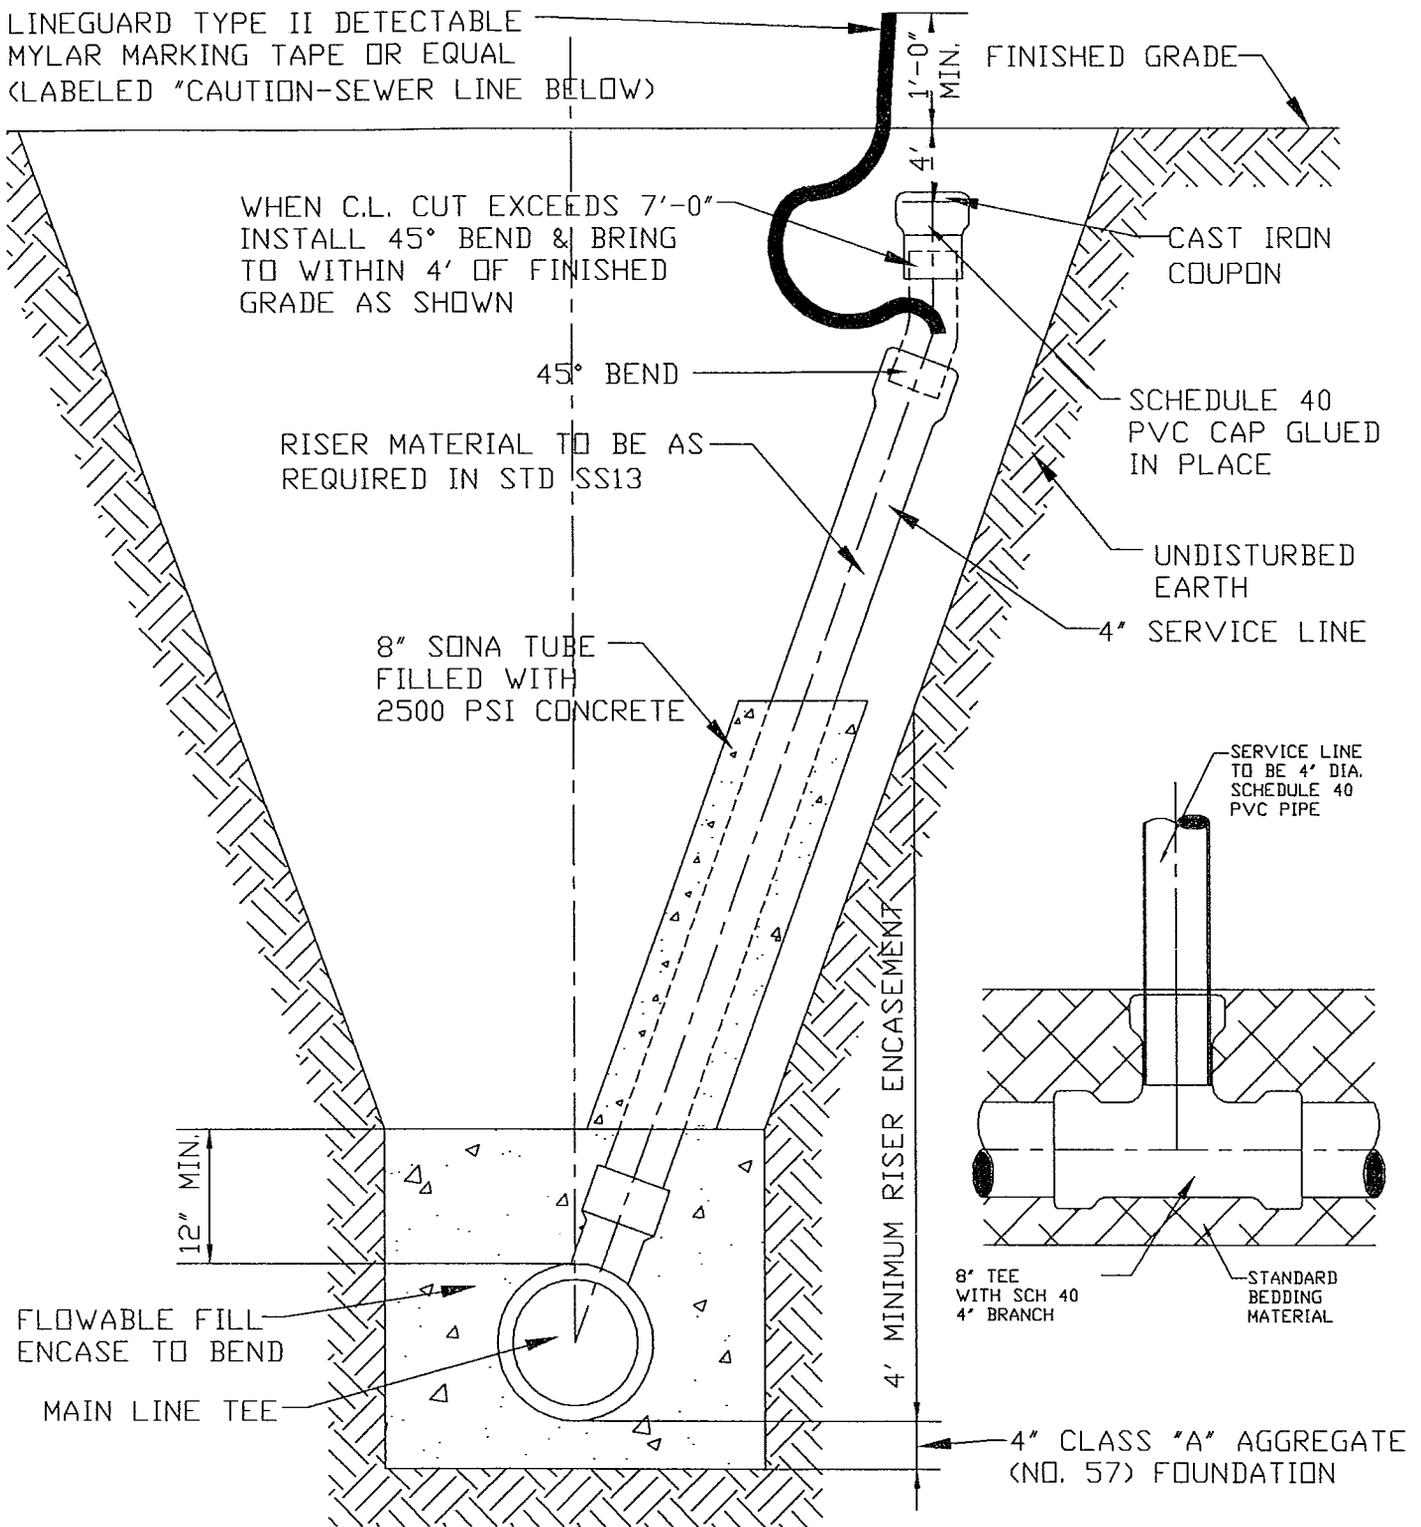

NOTE:

8' POST WITH FOUR-FOOT BURY SHALL BE REQUIRED TO MARK EACH TAP AS PER SECTION 315 OF THE STANDARD SPECIFICATIONS.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO:
STANDARD DRAWINGS

DRAWING NAME:
05_S_RISERNORMALDEEP

SANITARY SEWER TAP
NORMAL TRENCH, DEPTH > 15'

S6

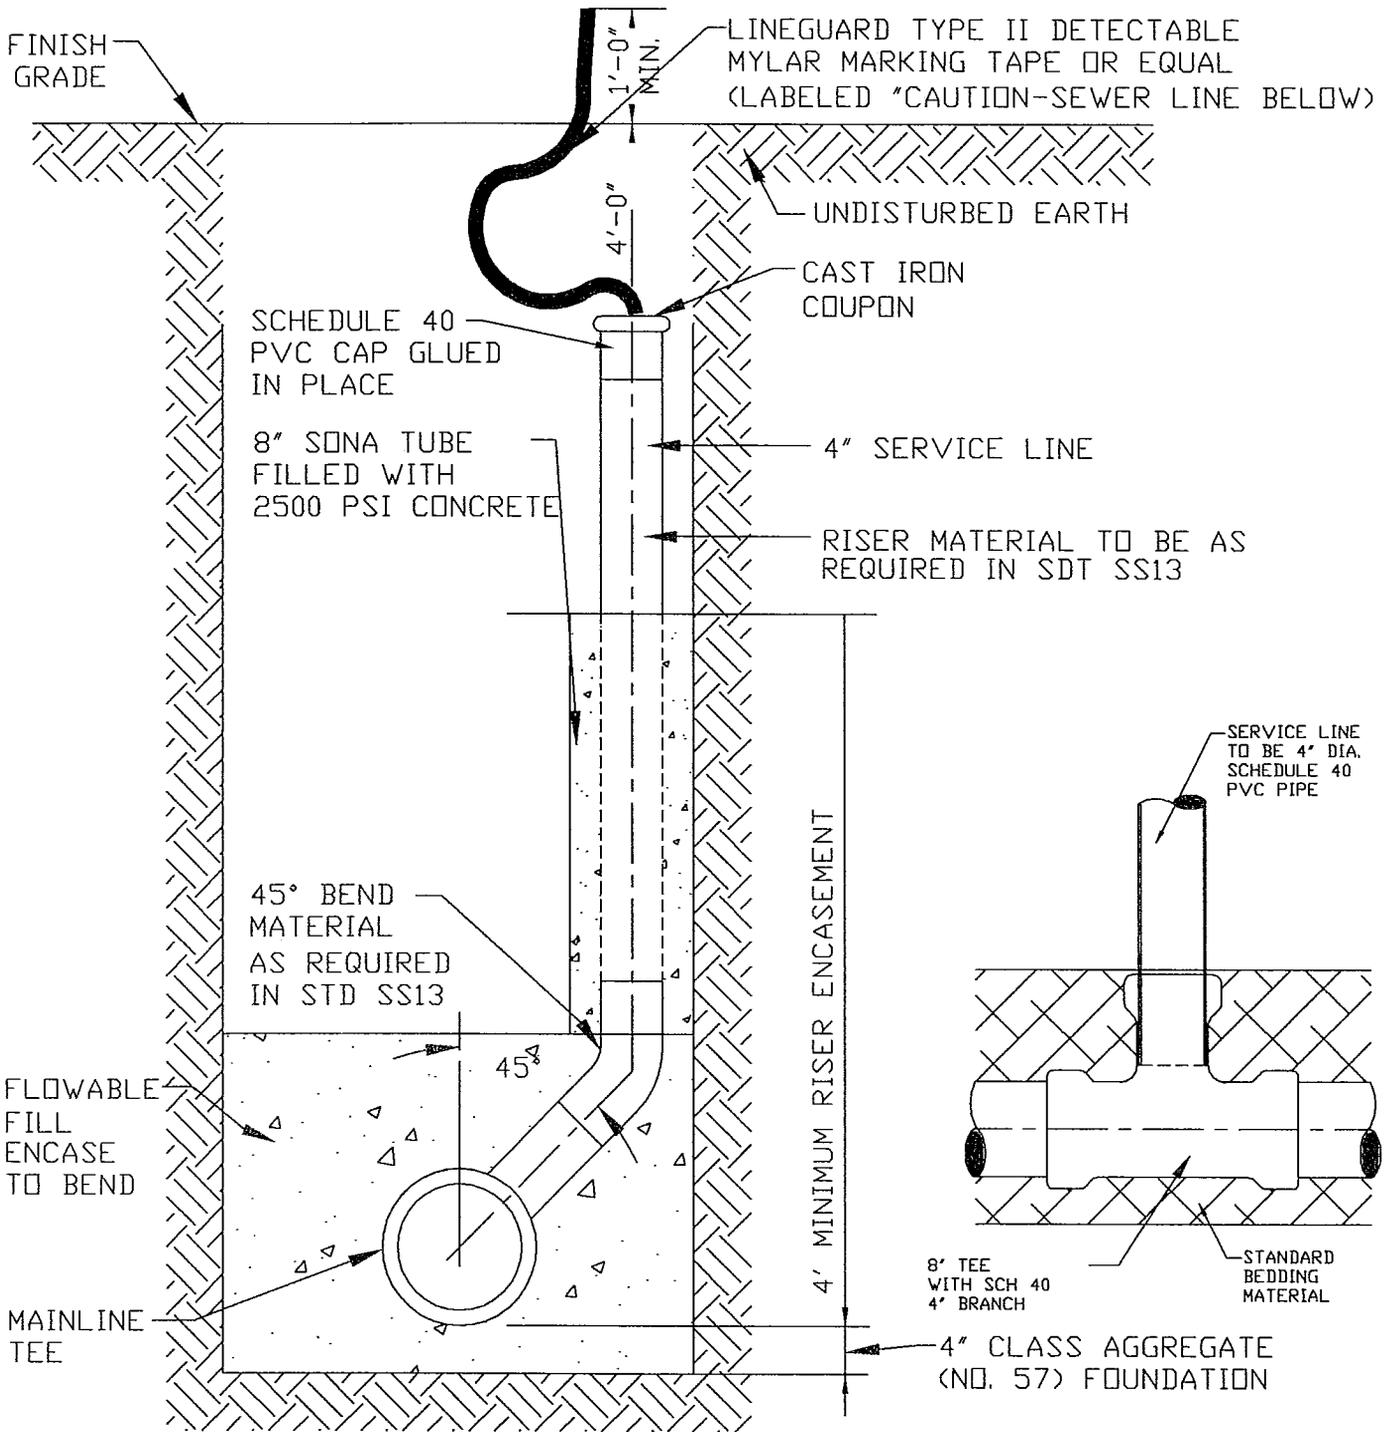

NOTES:

1. 8' POST WITH FOUR-FOOT BURY SHALL BE REQUIRED TO MARK EACH TAP AS PER SECTION 315 OF THE STANDARD SPECIFICATIONS.
2. NARROW TRENCH TAP TO ONLY BE USED WITH PRIOR APPROVAL OF CITY ENGINEER.



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT


PROJECT NO.:
STANDARD DRAWINGS

DRAWING NAME:
07_S_RISER/NARROWDEEP

SANITARY SEWER TAP
NARROW TRENCH, DEPTH > 15'

S7

NOTE:
 BEDDING GRAVEL SHALL BE COMPOSED OF
 CRUSHED ROCK CONFORMING TO STANDARD
 SPECIFICATIONS, SECTION 703.01, TYPE A OR B.

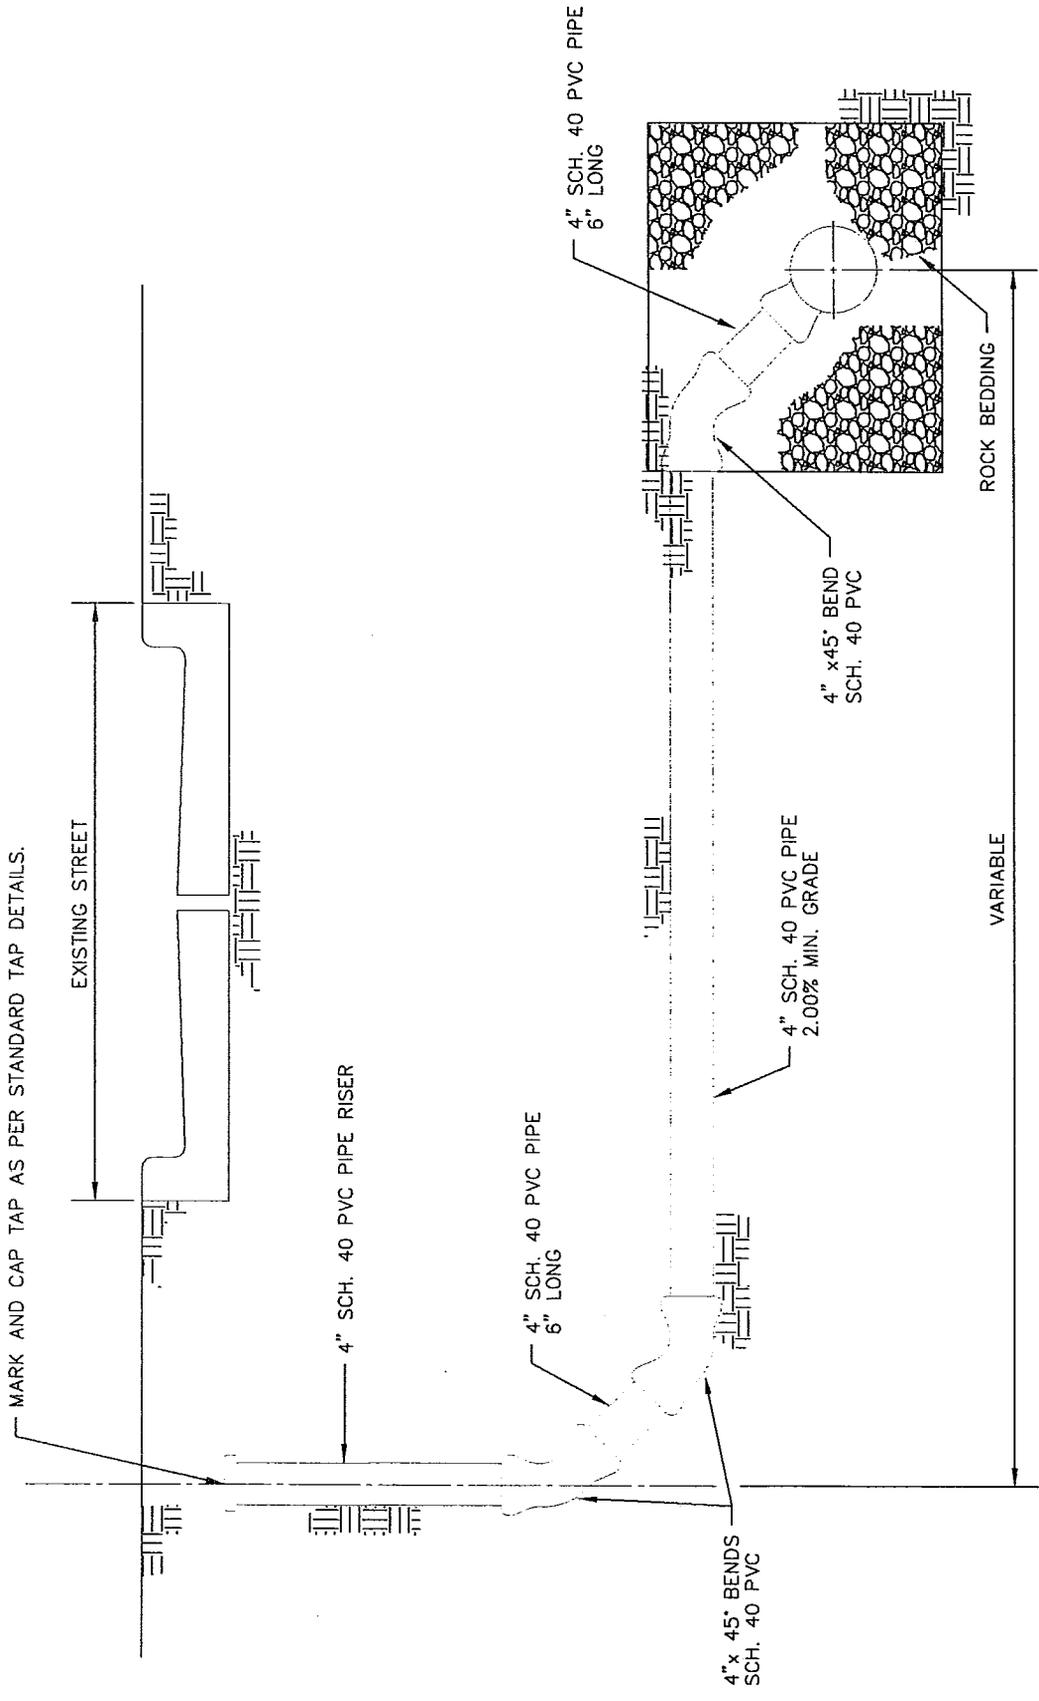


CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
 STANDARD_DRAWINGS


DRAWING NAME:
 08_S_LONGSERVICE

LONG SERVICE CONNECTION
SANITARY SEWER LINE


S8

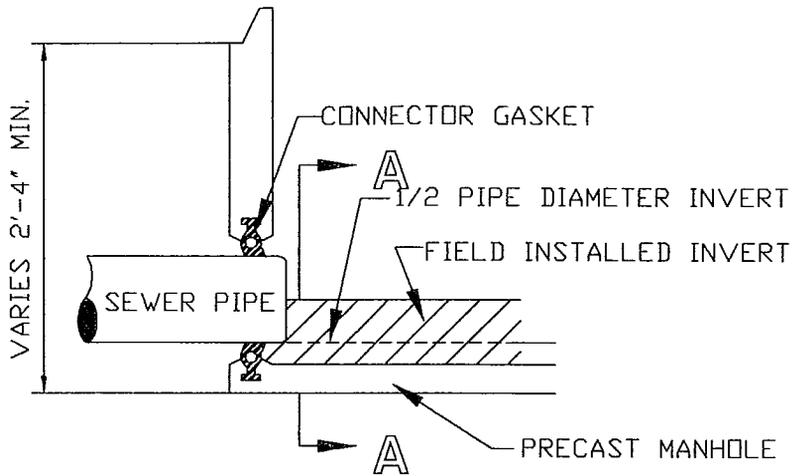


TYPE A MANHOLE

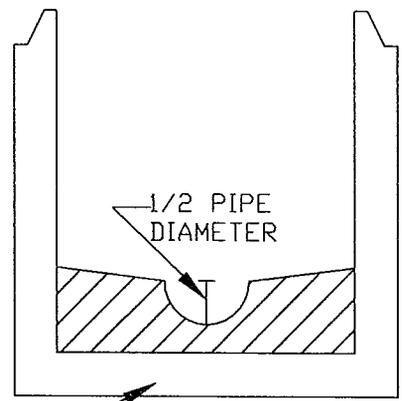


SECTION A-A

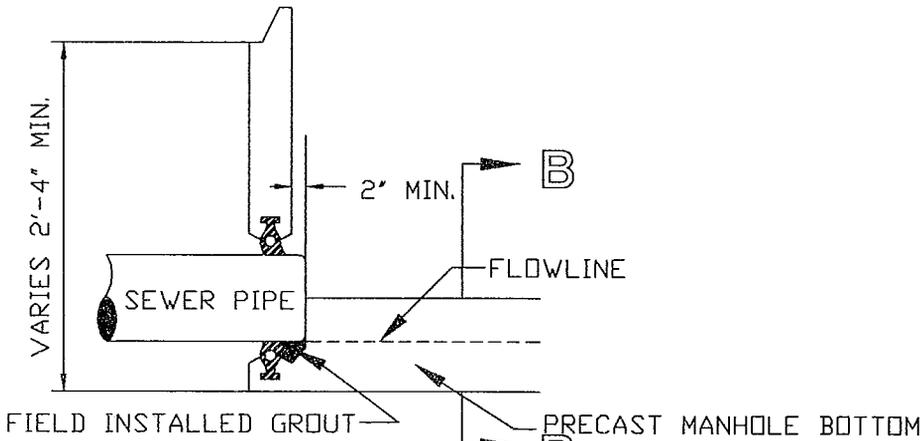


TYPE B MANHOLE

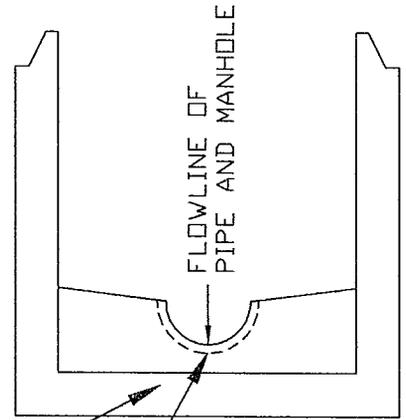

SECTION B-B

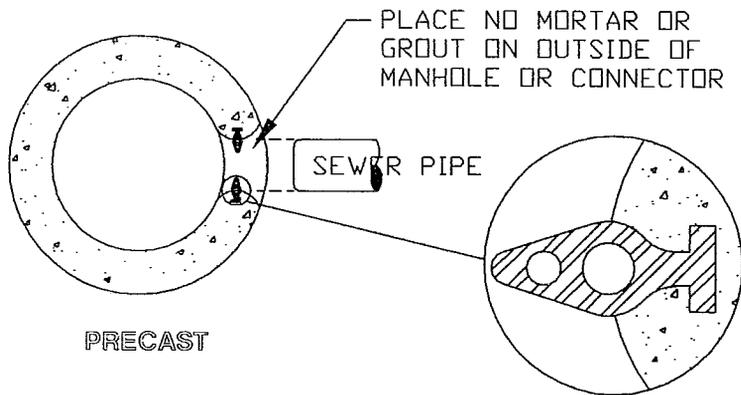

PRECAST

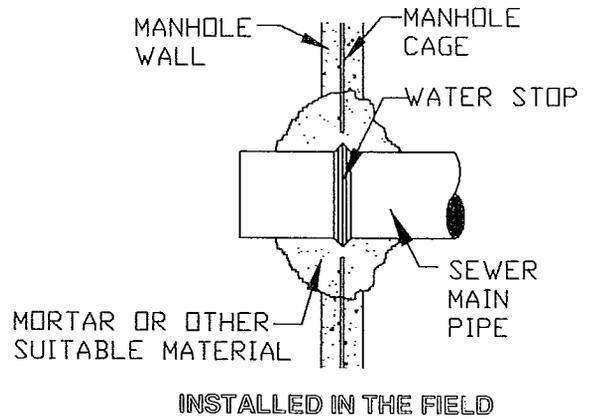

INSTALLED IN THE FIELD



**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**


PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
09_S_MHC CONNECTION

**MANHOLE CONNECTIONS
SANITARY SEWER LINE**


S9

M.H. TOP ADJUSTMENT SHALL BE ACCOMPLISHED BY THE USE OF 2" OR 4" REINFORCED CONCRETE CONCENTRIC RINGS OR BRICK & MORTAR AS FINISH GRADE REQUIRES, PLASTERED WITH 1/4" GROUT. APPROVED PLASTIC RINGS MAY ALSO BE USED.

FINISHED GRADE TO BE DETERMINED BY ENGINEER

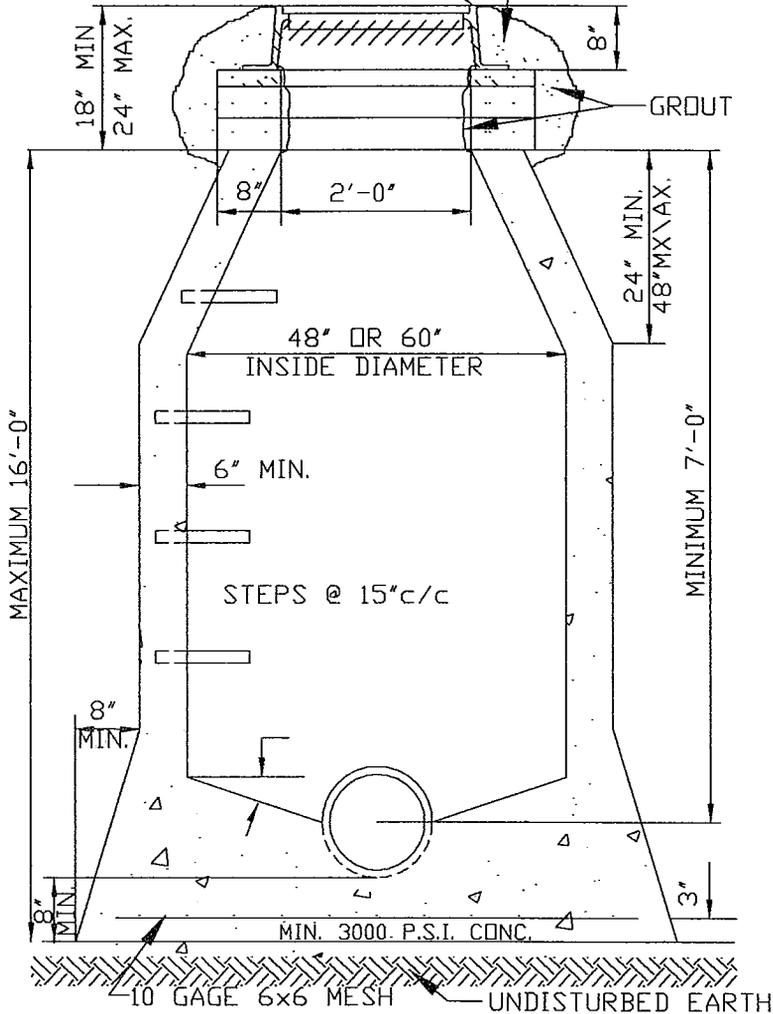


MONOLITHIC CONSTRUCTION

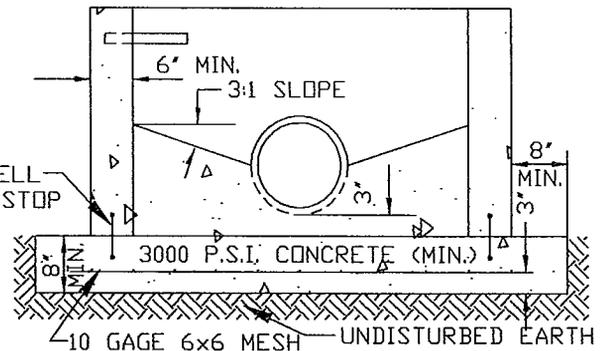


STAGE CONSTRUCTION

ALTERNATE 1

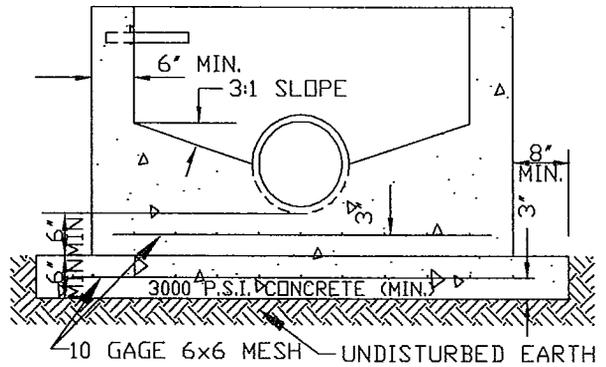

STAGE CONSTRUCTION

ALTERNATE 2

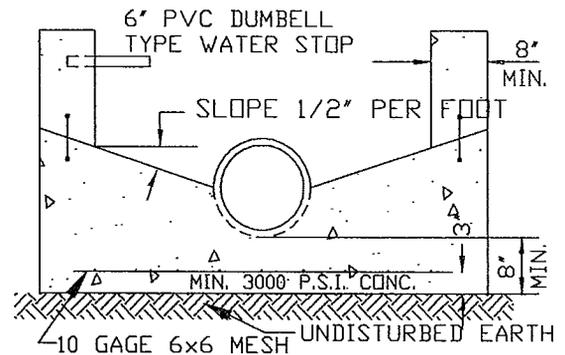

STAGE CONSTRUCTION

ALTERNATE 3

NOTES:

1. STEP DETAIL SHOWN ON STANDARD DRAWING SS 11.
2. LOW SLUMP CONCRETE SHALL BE PLACED IN THE FOOTINGS AND LOWER WALLS, AND SHALL BE PLACED AND VIBRATED IN ONE FOOT LIFTS.
3. AN INSPECTOR MUST BE PRESENT BEFORE AND DURING THE PLACING OF THE CONCRETE.
4. THIS MANHOLE SHALL NOT BE USED IN PAVED STREETS OR OTHER TRAVELED AREAS.
5. THE CONCRETE MUST SET FOR 48 HOURS BEFORE PIPE INSIDE OF MANHOLE IS TRIMMED.
6. (ALTERNATE 3) INVERT MUST BE FORMED AT TIME OF BOTTOM POUR.
7. WATER STOPS MAY BE ELIMINATED IF BARREL OF MANHOLE IS POURED WITHIN 4 HOURS AFTER BASE IS CLEANED OF ALL MUD, SILT AND DEBRIS.
8. FLAT TOP AND ECCENTRIC TOP ACCEPTABLE.









**CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT**

PROJECT NO.:
STANDARD DRAWINGS
DRAWING NAME:
10_B_CIPMANHOLE

**CAST-IN-PLACE
MANHOLE DETAIL**

S10

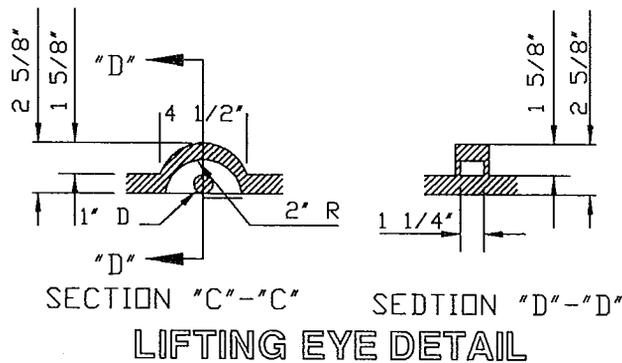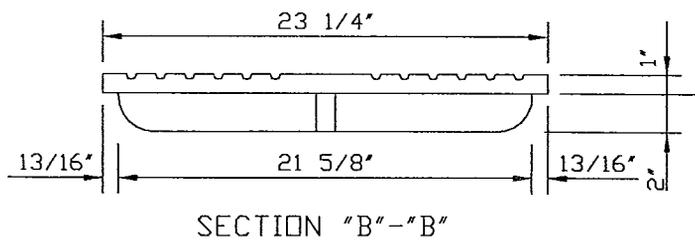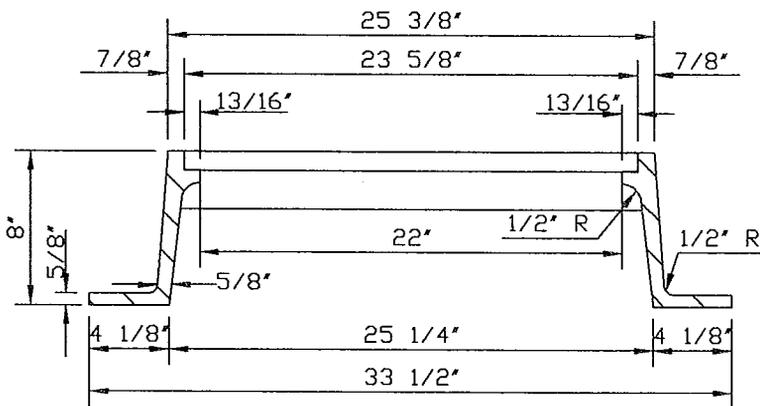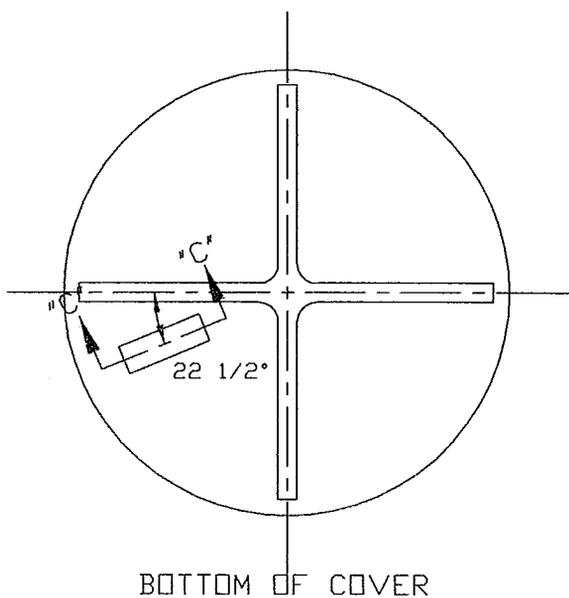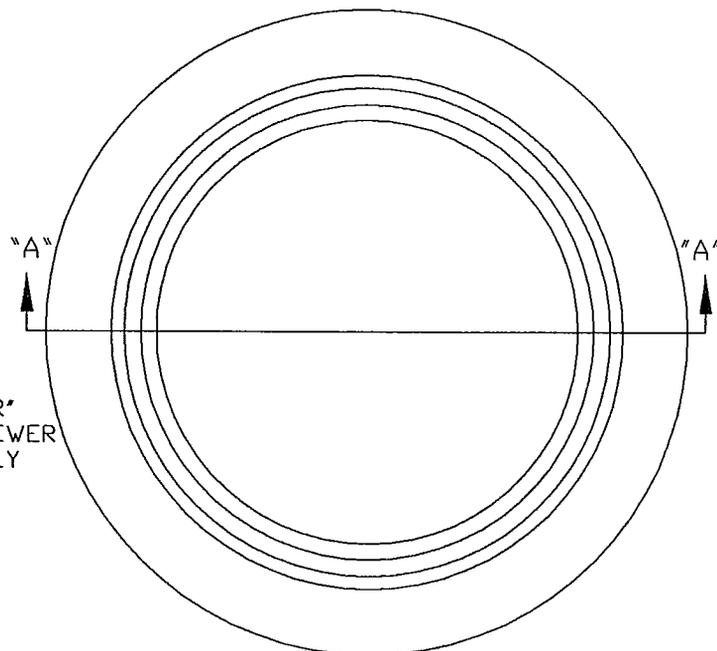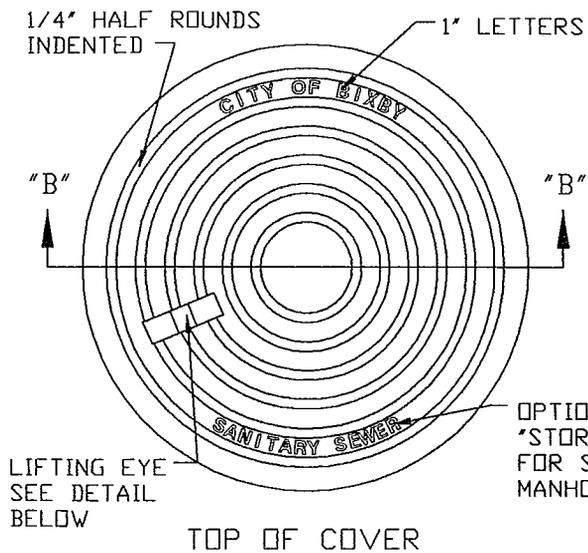

NOTE:
REQUIRED MINIMUM WEIGHT 300 LBS.



CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT


PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
12_S_MHFRAME&COVER

FRAME AND COVER DETAIL
SANITARY SEWER MANHOLE


S12

LIFTING EYE
SEE DETAIL
BELOW


1" LETTERS

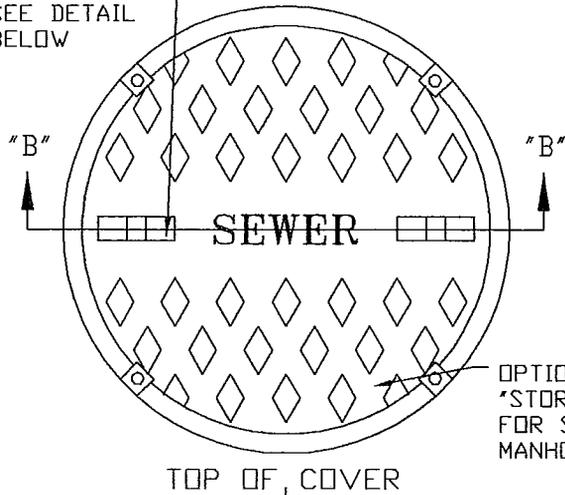


TOP OF COVER

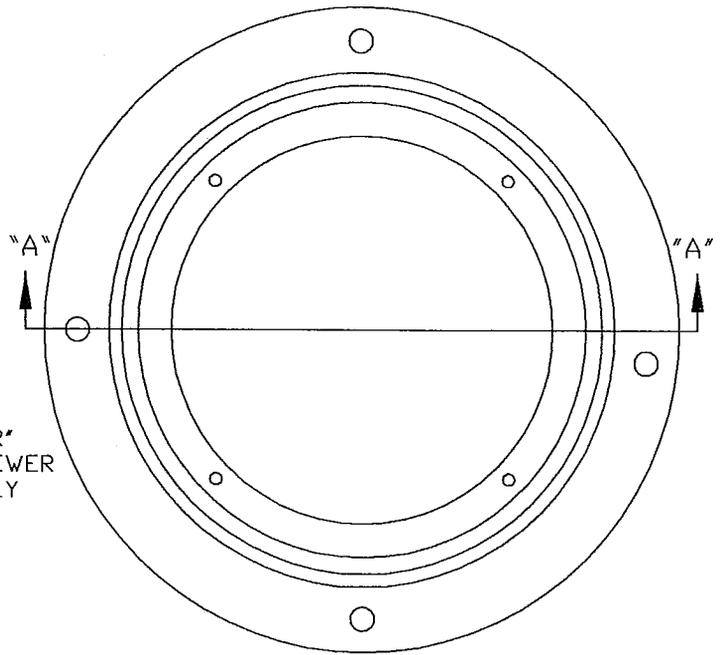

PLAN

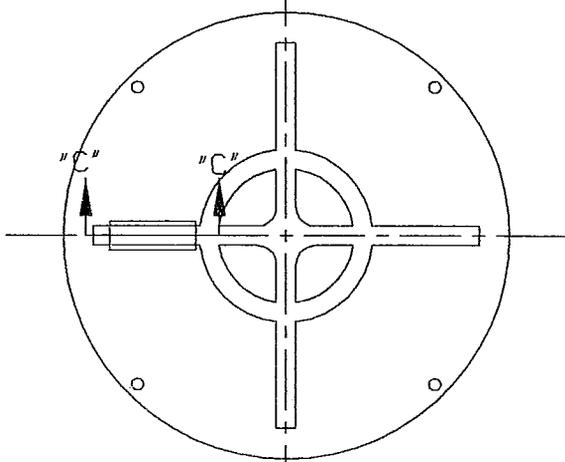


BOTTOM OF COVER

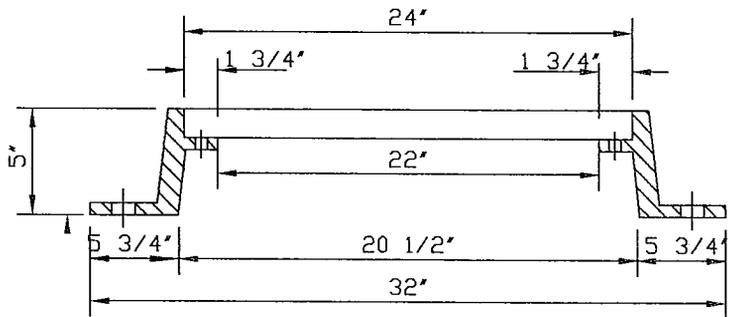


SECTION "A"- "A"

MANHOLE FRAME

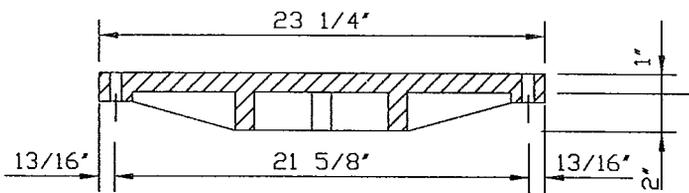

SECTION "B"- "B"


MANHOLE COVER

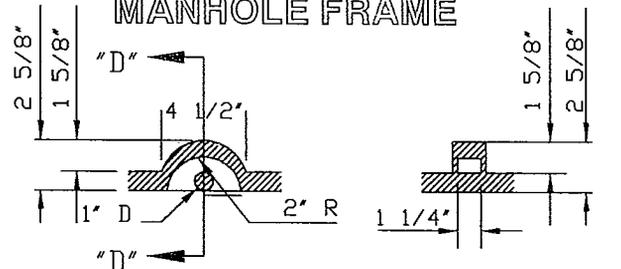

SECTION "C"- "C"

SECTION "D"- "D"

LIFTING EYE DETAIL

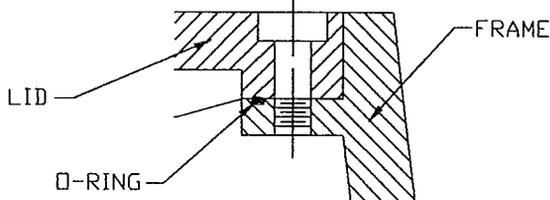

NOTE:

1. TWO PICK BARS ARE STANDARD.
2. WATER-TIGHT O-RING & FOUR 5/8"x1 1/2" STAINLESS STEEL BOLTS ARE FURNISHED WITH SET.
3. FOUR 1 1/4" ANCHOR BOLT HOLES ARE CAST INTO FLANGE
4. REQUIRED MIN. WEIGHT 300 LBS.




CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO:
STANDARD DRAWINGS
DRAWING NAME:
13_S_TIGHTFRAME&COVER

WATER-TIGHT FRAME & COVER
SANITARY SEWER MANHOLE

S13

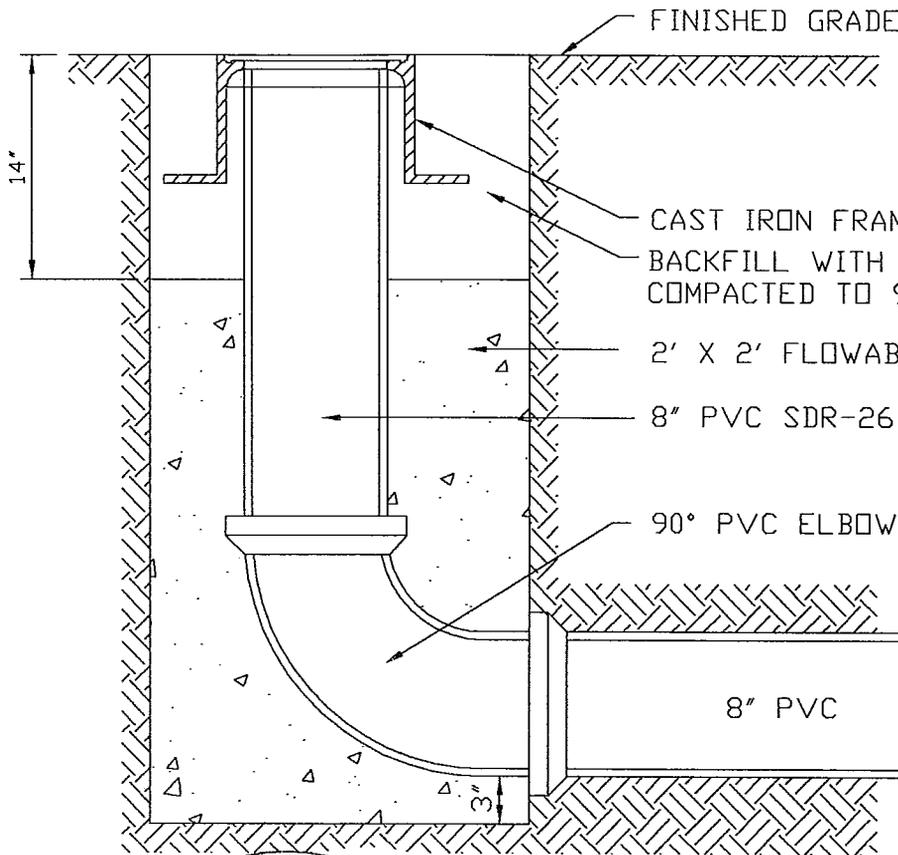

FINISHED GRADE

14"

CAST IRON FRAME & COVER
 BACKFILL WITH SELECT FILL
 COMPACTED TO 95% STD. DENSITY


2' X 2' FLOWABLE FILL

8" PVC SDR-26


90° PVC ELBOW

8" PVC


LAMPHOLE DETAIL

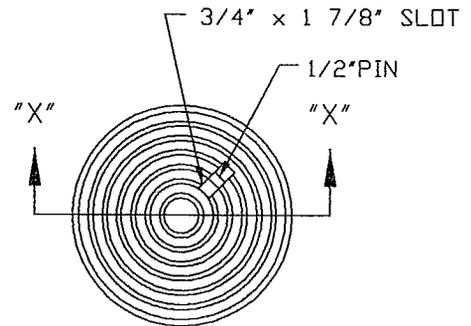


TOP OF COVER



BOTTOM OF COVER

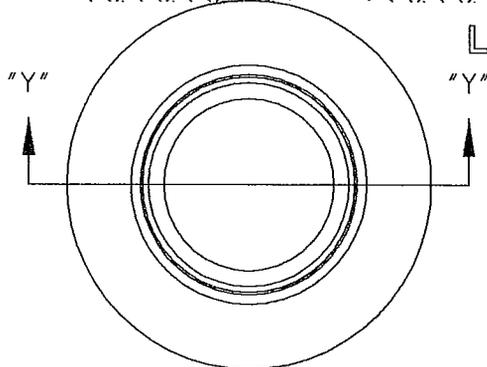


NOTE:
 REQUIRED MIN. WEIGHT: 120

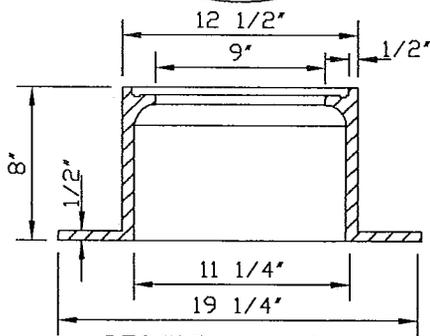

SECTION "Y"- "Y"

LAMPHOLE FRAME

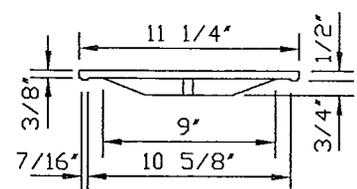

SECTION "X"- "X"

LAMPHOLE COVER




CITY OF BIXBY, OKLAHOMA
 ENGINEERING DEPARTMENT

PROJECT NO:
 STANDARD DRAWINGS
 DRAWING NAME:
 14_S_LAMPHOLE


LAMPHOLE DETAILS
 SANITARY SEWER LINE

S14

8-#5 REBARS TYP. USE
 4000# CLASS AA CONC.
 MINIMUM 2 MATS OF STEEL REQUIRED

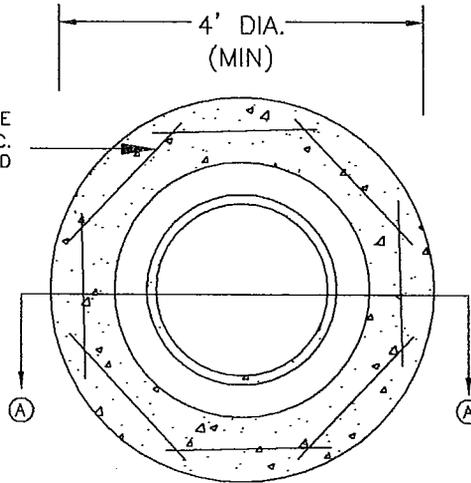

CONCRETE COLLAR
 12" MINIMUM THICKNESS

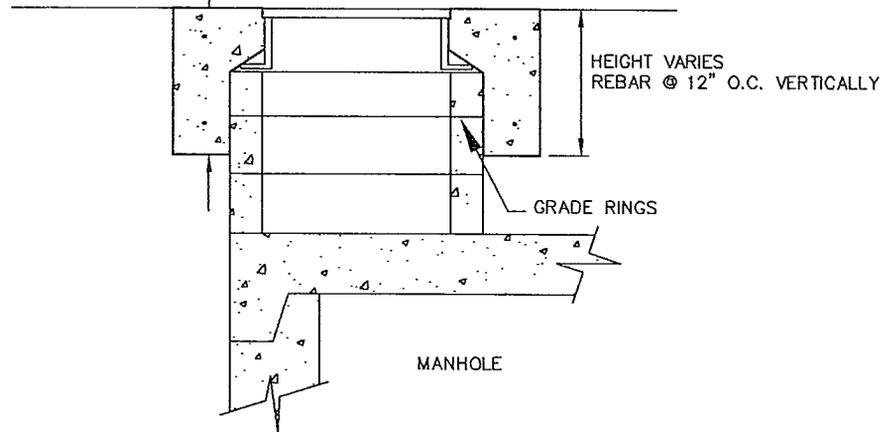

NOTE: LAMPHOLES REQUIRE 2' DIAM. X 12" CONC. COLLAR




CITY OF BIXBY, OKLAHOMA
 ENGINEERING DEPARTMENT


PROJECT NO:
 STANDARD_DRAWINGS
 DRAWING NAME:
 01_WBEDDINGDETAIL

CONCRETE MANHOLE COLLAR
 FOR ASPHALT PAVEMENT

S15

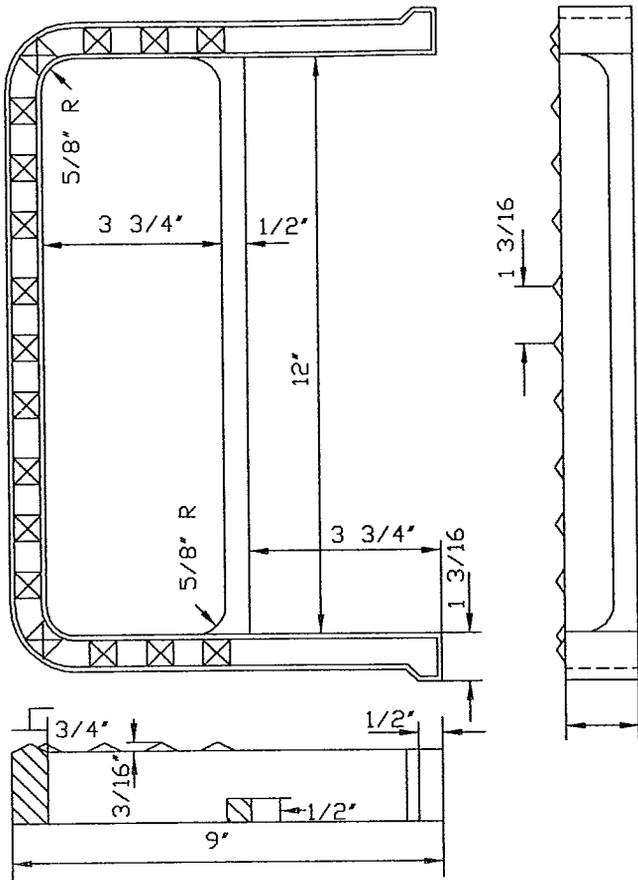


LARGE STEP

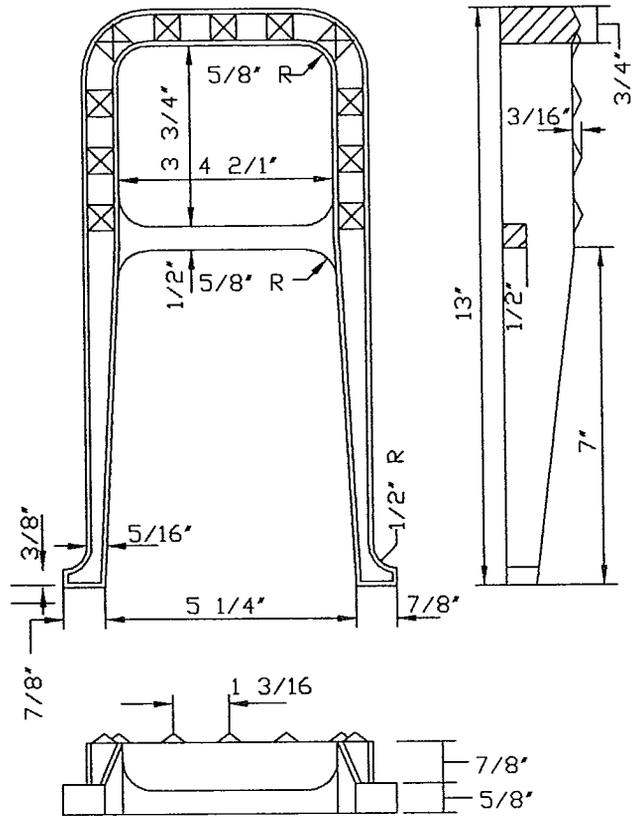


STANDARD STEP


INLINE

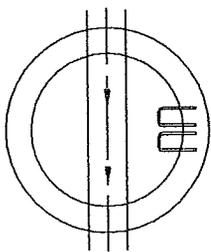


TEE

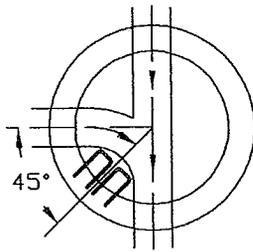





CROSS

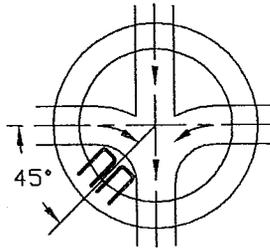

"Y"

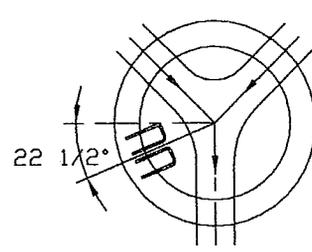

LOCATION OF MANHOLE STEPS

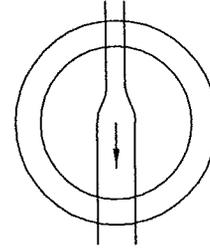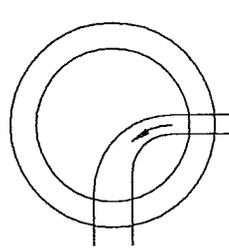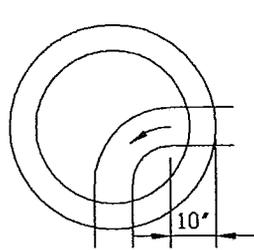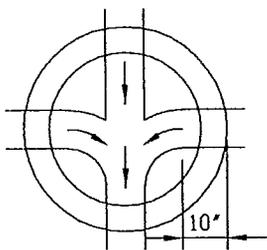

TYPICAL MANHOLE INVERT DETAIL





CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS

DRAWING NAME:
16_S_MHSTEPS&INVERT

SANITARY SEWER MANHOLE
STEPS & INVERT DETAILS

S16

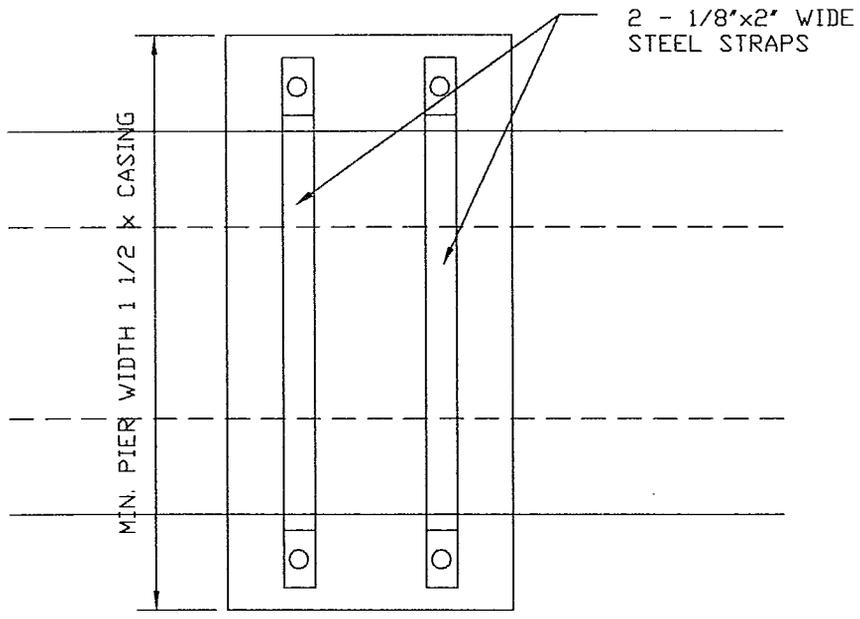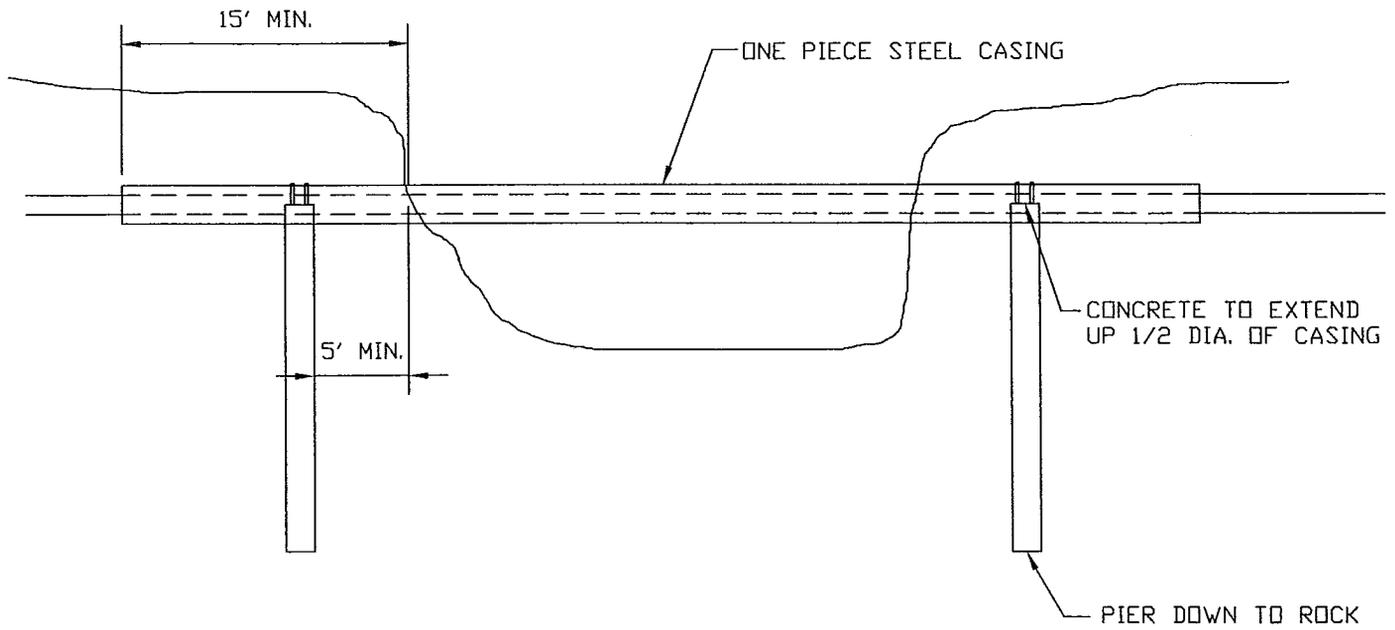


CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD DRAWINGS


DRAWING NAME:
17_S_AERIALCROSSING

AERIAL STREAM CROSSING
SANITARY SEWER LINE

S17

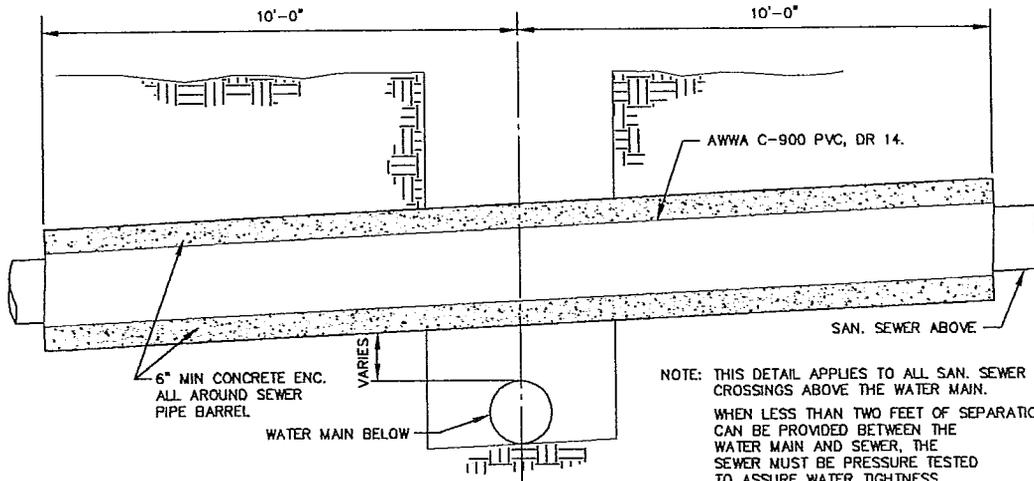

NOTE: THIS DETAIL APPLIES TO ALL SAN. SEWER CROSSINGS ABOVE THE WATER MAIN.
 WHEN LESS THAN TWO FEET OF SEPARATION CAN BE PROVIDED BETWEEN THE WATER MAIN AND SEWER, THE SEWER MUST BE PRESSURE TESTED TO ASSURE WATER TIGHTNESS PRIOR TO BACKFILLING PER OKLA. STATE DEPT. OF ENVIRONMENTAL QUALITY CHAPTER 655

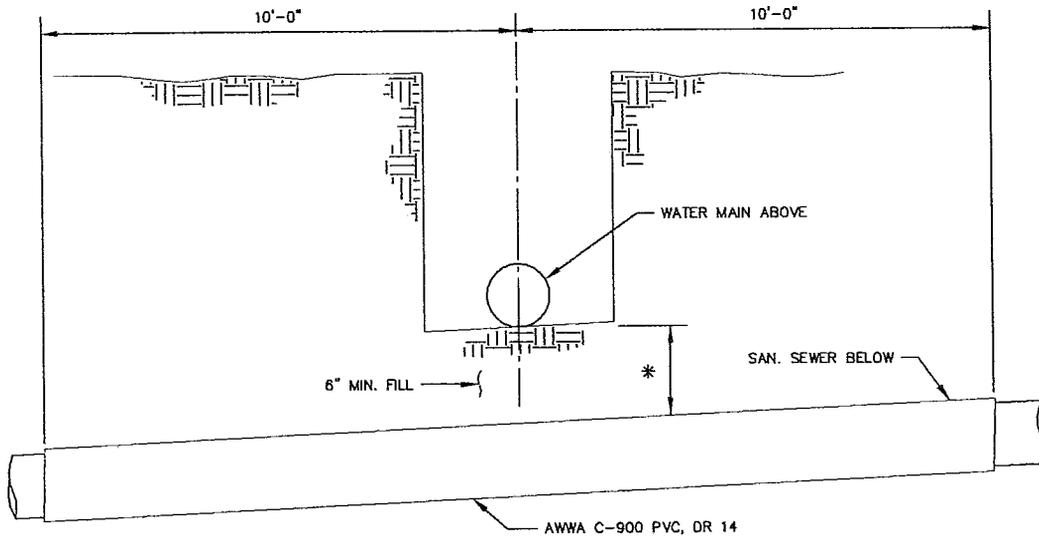

* NOTE: THIS DETAIL APPLIES TO ALL SAN. SEWER CROSSINGS WHERE VERTICAL SEPARATION OF WATER MAIN AND SEWER IS TWO FEET OR LESS AND WHEN SAN. SEWER IS BELOW WATER MAIN.




CITY OF BIXBY, OKLAHOMA
 ENGINEERING DEPARTMENT


PROJECT NO.:
 STANDARD DRAWINGS
 DRAWING NAME:
 18_S_ENCASEMENT

ENCASEMENT DETAILS
 SANITARY SEWER LINE

S18

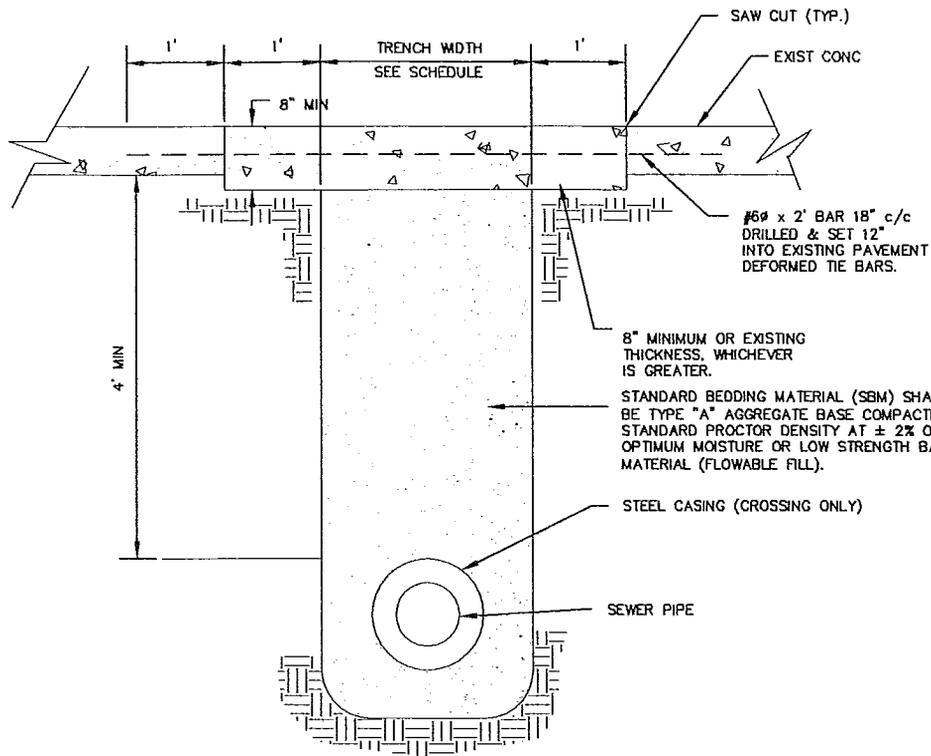

INSIDE PIPE DIAMETER (IN.)	STANDARD TRENCH WIDTH (IN.)
8	24
10	30
12	30
15	36
18	36
21	42
24	42
27	48
30	48
36	54
42	60
48	66

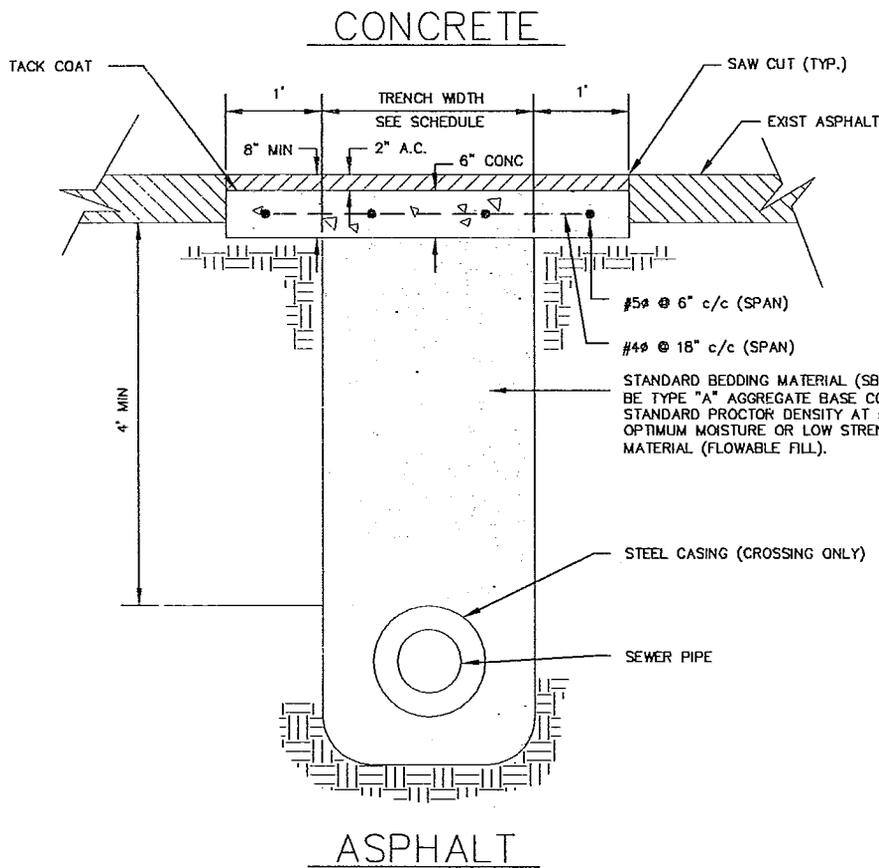

CITY OF BIXBY, OKLAHOMA
ENGINEERING DEPARTMENT

PROJECT NO.:
STANDARD_DRAWINGS

DRAWING NAME:
19_S_PAVEMENTREPAIRS

PAVEMENT CUTS & REPAIRS
SANITARY SEWER LINE

S19